



CITYSCAPE X-LARGE LINEAR CHANDELIER

SLLS568

General Product Information



Product Warranty



FCC Statement

Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



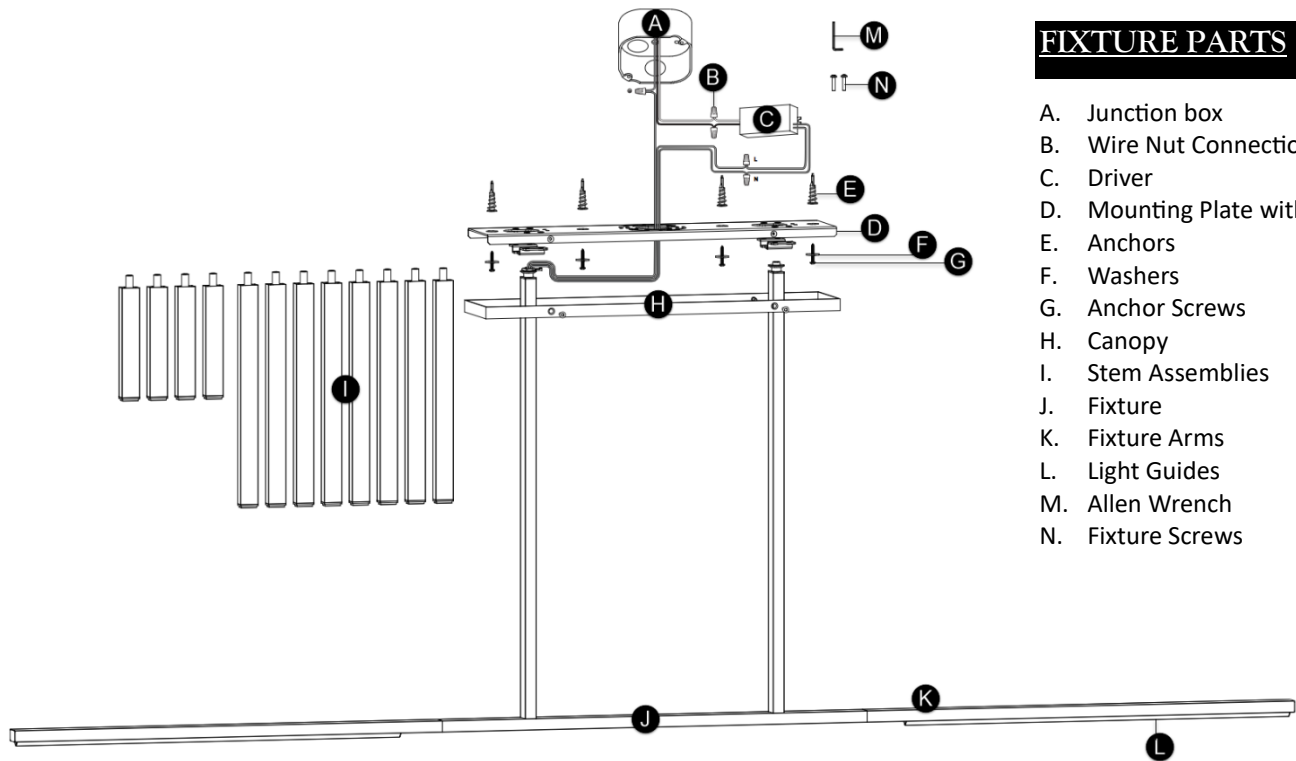

FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Driver
- D. Mounting Plate with Fitters
- E. Anchors
- F. Washers
- G. Anchor Screws
- H. Canopy
- I. Stem Assemblies
- J. Fixture
- K. Fixture Arms
- L. Light Guides
- M. Allen Wrench
- N. Fixture Screws

Please Note: It is best to have a second person assist with the installation steps described below.

INSTRUCTIONS

I. Preparing the Fixture

1. Remove the fixture from its packaging and examine all its parts. Then separate the mounting plate with fitters from the canopy.
2. Use the mounting plate to trace and mark the locations for the anchors. Drill a hole at the marked locations to fit the anchors into before drilling them in.
3. Determine the desired fixture height and complete the stem assemblies to suit by screwing the stems together. Ensure that both completed stems are equal in length.
4. Feed the fixture wires through one of the assembled stems and screw it on the top of the fixture. Then screw on the other stem.
5. Match the labels on the light guides to the labels on the endpoint of each fixture arm and install them accordingly (e.g. "V1" light guide to "V1" fixture arm endpoint).

II. Installing the Mounting Plate & Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Slide the washers through the anchor screws and drill them into the anchors to secure the mounting plate to the junction box and ceiling.
3. Lift the assembled fixture up and slide the tops of the stems onto the fitters attached to the mounting plate. It is best to have a second person assist with this portion of the installation.
4. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting bracket or a house wire (green or bare copper wire without insulation).
5. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire and hot power line wire
 - b) Neutral fixture wire and neutral power line wire
6. For 0-10V dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires, if not in use.
7. Place the driver in the canopy/junction box, ensuring the output driver wires are accessible.
8. Now, twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Negative (-) fixture wire to the negative (-) output driver wire
 - b) Positive (+) fixture wire to the positive (+) output driver wire
9. Carefully tuck all the wires into the canopy/junction box.
10. Place the canopy onto the mounting plate and secure it in place by installing the fixture screws.