


CHEVERNEY SEMI FLUSH MOUNT

LXF1004

General Product Information



WARRANTY



FCC STATEMENT

Tools Required



Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

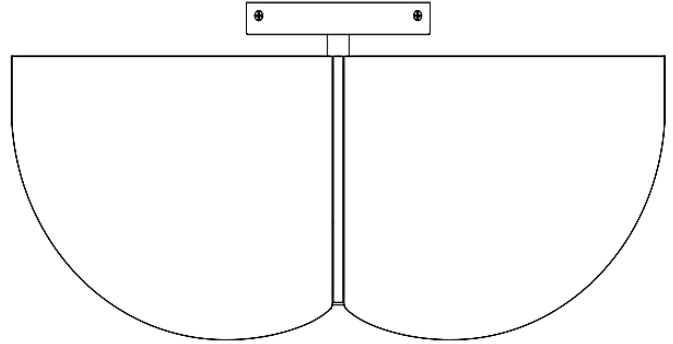

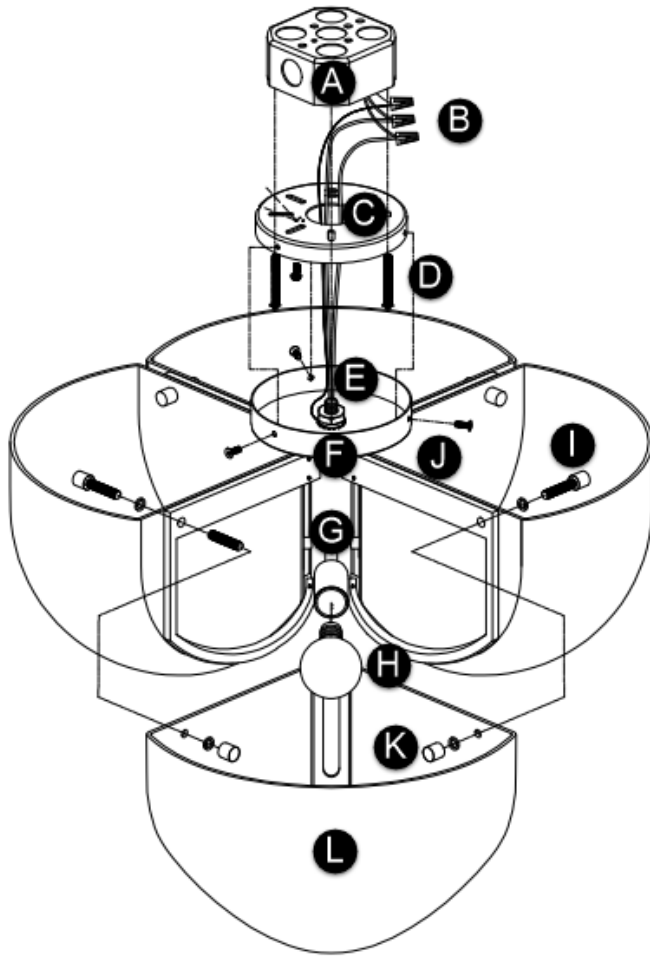

FIXTURE ANATOMY

- A. Junction Box
- B. Wires and Wire Nuts
- C. Mounting Plate
- D. Mounting Screws
- E. Hex Nut
- F. Canopy
- G. Socket
- H. Bulb (Not Included)
- I. Fixture Screws
- J. Canopy Screws
- K. Cap Nuts
- L. Shades

INSTRUCTIONS

I. Preparing for Installation

1. Secure the mounting plate to the junction box with the mounting screws.
2. Use the fixture screws and cap nuts to secure the shades onto the fixture.
3. Screw the bulbs into the sockets, referring to the label on the socket for Max Wattage information.

II. Wiring the Fixture

1. Wrap the fixture ground wire to the green ground screw on the mounting plate and secure, then connect to the ground wire in the junction box using the wire nut.
2. Connect the following wires with a wire nut:
 - a) Fixture neutral wire to the outlet neutral wire.
 - b) Fixture hot wire to the outlet hot wire.
3. Place all wires and wire nut connections into the junction box.

III. Installing the Fixture

1. Place the canopy onto the mounting place, then secure it in place using the canopy screws.