

# ATHENA SMALL PENDANT

AEP1071

## General Product Information:



## Safety Information:

### CAUTION—RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.  
USE MINIMUM 90°C SUPPLY CONDUCTORS.

### SAVE THESE INSTRUCTIONS!




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

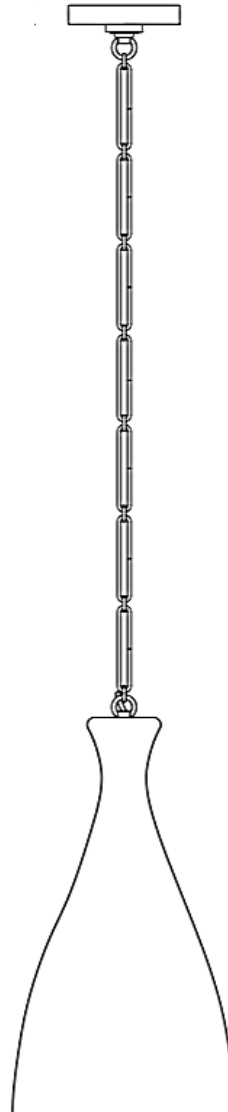

## FIXTURE ANATOMY

- A. Junction Box
- B. Wire Nuts
- C. Mounting Plate
- D. Canopy
- E. Screw Collar/Canopy Loop
- F. Collar Nut
- G. Upper Quick Link
- H. Chain
- I. Lower Quick Link
- J. Fixture Loop
- K. Shade
- L. Bulb

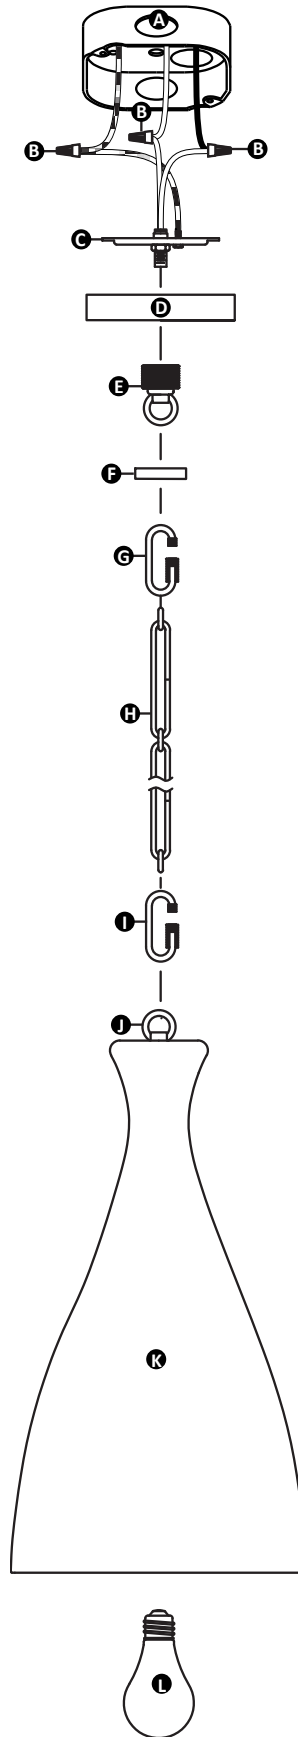

## **INSTRUCTIONS**

### **I. Preparing for Installation**

1. If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate and the screw collar onto the threaded nipple.
2. Secure the mounting plate to the junction box.
3. Determine the wanted height of the fixture and remove a portion of the chain by opening a link with pliers.
4. Install the bottom end of the chain onto the fixture loop using the lower quick link.
5. Unscrew the collar nut from the screw collar, install the collar nut and the canopy onto the chain (in that order).
6. Install the upper quick link onto the remaining end of the chain, then secure the quick link onto the canopy loop.
7. Weave the cord through the chain, collar nut, canopy, screw collar, threaded nipple, and out of the junction box. Trim the cord leaving enough to make electrical connections.

### **II. Wiring the Fixture**

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire (black) and hot power line wire from the junction box (hot to hot)
  - b) Neutral fixture wire (white) and neutral power line wire from the junction box (neutral to neutral)
4. Carefully tuck all the wires into the junction box.

### **III. Installing the Fixture**

1. Place the canopy onto the ceiling and secure it in place by screwing the collar nut tightly onto the screw collar.
2. Screw the lamp into the socket. Please refer to the label on the socket for max wattage information.