

# WITLEY PENDANT

SLO1083TXB

## General Product Information:



## Safety Information:

### CAUTION—RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.

### SAVE THESE INSTRUCTIONS!




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

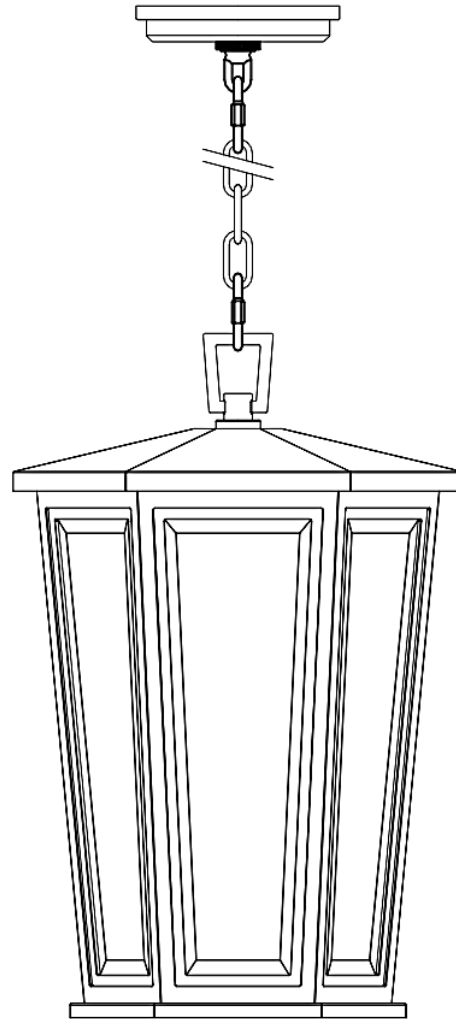

## FIXTURE ANATOMY

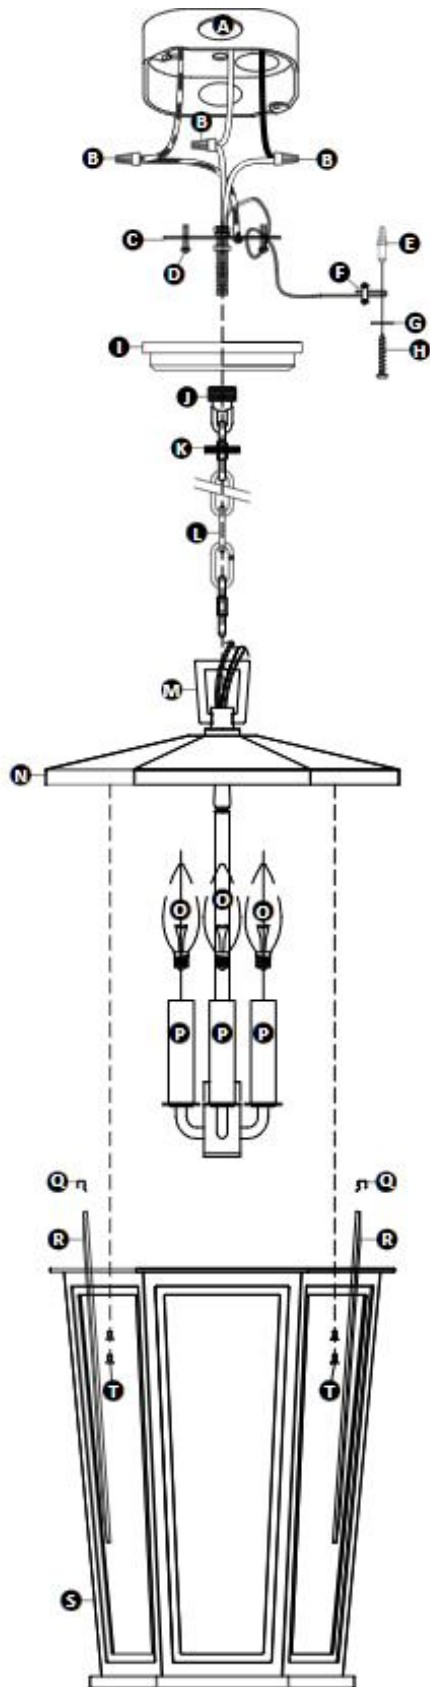

- A. Junction Box
- B. Fixture Wires with Wire Nuts
- C. Mounting Plate
- D. Mounting Screws
- E. Anchor
- F. Safety Cable
- G. Anchor Washer
- H. Anchor Screw
- I. Canopy
- J. Collar Loop/Screw Collar
- K. Collar Nut
- L. Quick Link and Chain
- M. Fixture Loop
- N. Fixture Cover
- O. Bulbs (Not Included)
- P. Sockets
- Q. Glass Clip
- R. Glass Panel
- S. Cage
- T. Cage Screw

## **INSTRUCTIONS**

### **I. Preparing for Installation**

1. If necessary, screw the shorter end of the threaded nipple tightly onto the mounting plate and the screw collar onto the threaded nipple.
2. Secure the mounting plate to the junction box.
3. Screw the bulbs into the sockets. Please refer to the label on the socket for Max Wattage information.
4. Install glass panels by carefully sliding them into the cage (the bevel facing outwards) and secure them in place using the glass clips.
5. Place the cover over the cage, then lock them together using cage screws.
6. Feed the fixture wires and safety cable through the fixture loop, then screw the fixture loop onto the fixture.
7. Determine the wanted height of the fixture and remove a portion of the chain by opening a link with pliers.
8. Install the bottom end of chain onto the fixture loop using the lower quick link.
9. Unscrew the collar nut from the screw collar, install the collar nut and the canopy onto the chain (in that order).
10. Install the upper quick link onto the remain end of chain, then secure the quick link onto the screw collar/collar loop.
11. Weave the fixture wires and safety cable through the chain, collar nut, canopy, threaded nipple, and out of the junction box. Trim the fixture wires leaving enough to make electrical connections.
12. Loop and secure the safety cable over a stable structure that agrees with the local building code.

### **II. Wiring the Fixture**

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire (round & smooth) and hot power line wire from the junction box (hot to hot)
  - b) Neutral fixture wire (square & rigid) and neutral power line wire from the junction box (neutral to neutral)
4. Carefully tuck all the wires into the junction box.

### **III. Installing the Fixture**

1. Place the canopy onto the ceiling and secure it in place by screwing the collar nut tightly onto the screw collar.