

WITLEY WALL LANTERN

SLO1031TXB, SLO1041TXB

General Product Information



Safety Information

SAVE THESE INSTRUCTIONS!

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.


Install and use this product in adherence with local electrical codes and regulations.

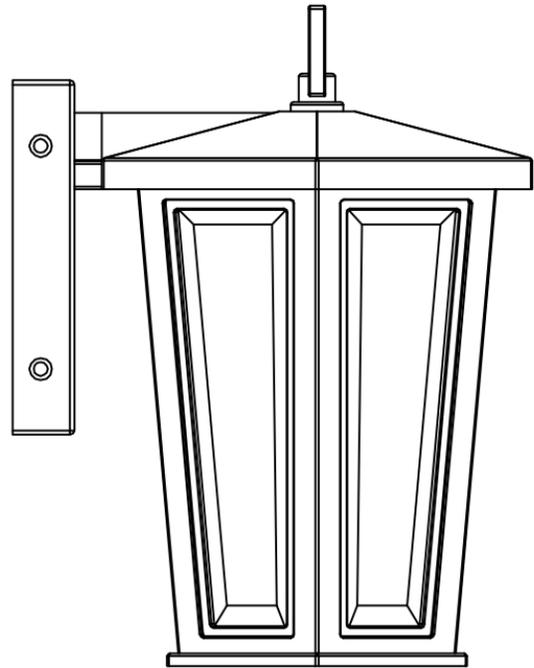

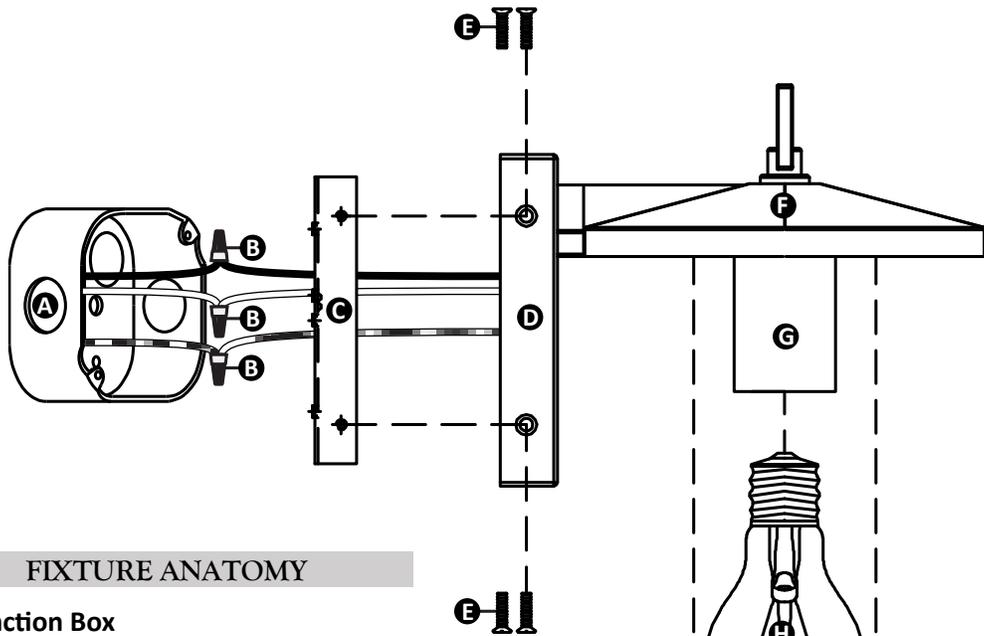

FIXTURE ANATOMY

- A. Junction Box
- B. Wire Nut
- C. Mounting Plate
- D. Backplate
- E. Fixture Screws
- F. Fixture Cover
- G. Socket
- H. Bulb (Not Included)
- I. Glass Clips
- J. Glass Panel
- K. Cage Screws
- L. Cage

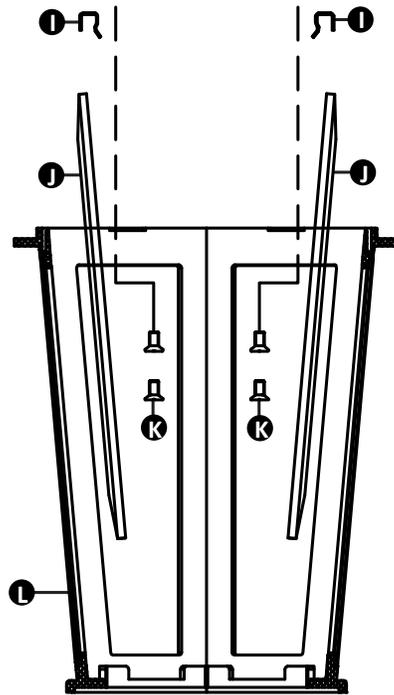

INSTRUCTIONS

I. Preparing the Fixture

1. Remove the mounting plate from the fixture body.
2. Install the mounting plate to the junction box.
3. Screw the lamp into the socket. Please refer to the label on the socket for max wattage information.
4. Install glass panels by carefully sliding them into the cage (the bevel facing outwards) and securing them in place using the clips.
5. Place the cover over the cage, then lock them together using cage screws.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Adjust the length of the wires using a wire stripper/cutter, if necessary.
4. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black) and hot power line wire from the junction box (hot to hot)
 - b) Neutral fixture wire (white) and neutral power line wire from the junction box (neutral to neutral)
5. Carefully tuck all the wires into the junction box.
6. Carefully place the wires and wire nut connections into the junction box.

III. Installing the Fixture

1. Affix the backplate to the mounting plate and secure it with the provided fixture screws.
2. For wet locations, caulk around the base of the fixture with a waterproof construction sealant.