

# BALLEROY CHANDELIER

LXC1134

### General Product Information

 <p>Intertek</p>	 <p>SAVE THESE INSTRUCTIONS!</p>	 <p>INDOOR</p>	 <p>DAMP LOCATION SAFE</p>
 <p>NEC COMPLIANT JUNCTION BOX</p>	 <p>CONVERTS TO LED</p>	 <p>PLEASE SEE <a href="http://visualcomfort.com">visualcomfort.com</a> FOR PRODUCT SPECS</p>	 <p>CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!</p>

  
WARRANTY

  
FCC STATEMENT

### Tools Required

 <p>PHILLIPS-HEAD SCREWDRIVER</p>	 <p>WIRE CUTTER</p>
--	--

### Safety Information

**CAUTION-RISK OF FIRE**


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

**USE MINIMUM 90°C SUPPLY CONDUCTORS.**

 Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



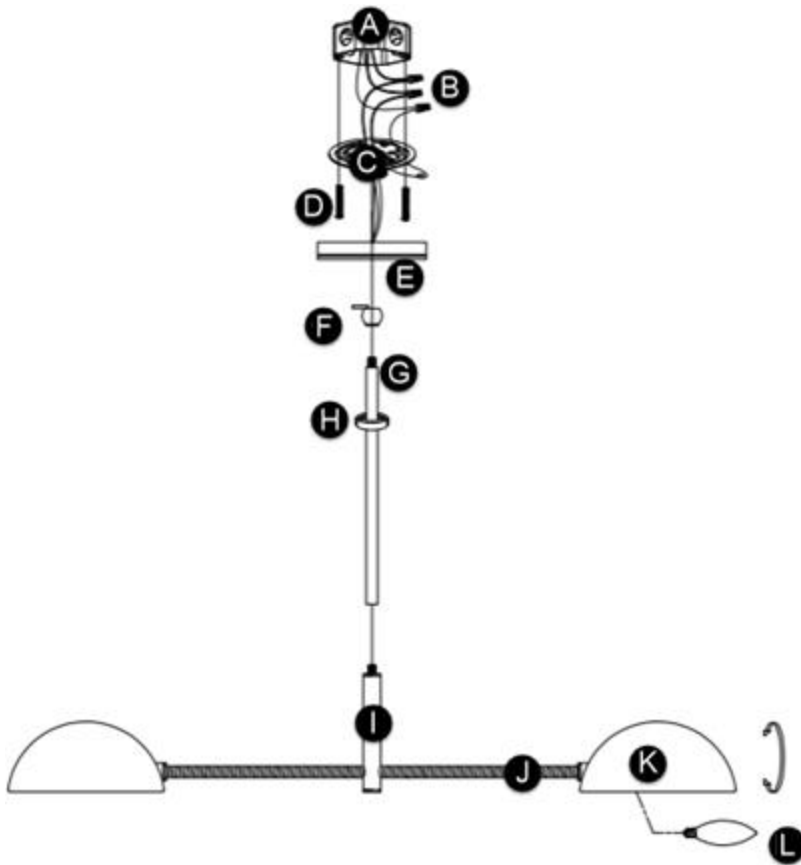

## FIXTURE PARTS

- A. Junction box
- B. Wires and Wire nuts
- C. Mounting plate
- D. Mounting screws
- E. Canopy
- F. Half Ball
- G. Top Stem
- H. Collar nut
- I. Fixture
- J. Fixture arms
- K. Shade
- L. Bulb (Not Included)

## INSTRUCTIONS

### I. Preparing the Fixture

1. Determine the desired height of the fixture and use the appropriate number of stems (5 included) to assemble the fixture to preference.
2. Feed the fixture and ground wires through the stems being used.
3. Attach the collar nut, canopy and half ball to the top stem.
4. Screw all the stems together, then screw the stem assembly on to the top of the fixture
5. Install the mounting plate to the junction box.
6. Screw the half ball to the top stem., then slide the half ball assembly onto the mounting plate.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) fixture wire (black or round and smooth, depending on the fixture) and hot power line wire from the junction box (hot to hot)
  - b) fixture wire (white or square and rigid, depending on the fixture) and neutral power line wire from the junction box (neutral to neutral)
4. Carefully tuck all wires into the junction box.

### III. Installing the Fixture

1. Install the canopy to the junction box and secure it with the collar nut.
2. Insert lightbulbs into the sockets, referring to the label on the socket for Max Wattage information.
3. Adjust the shades as needed to face up or down.