


LEONARD PICTURE LIGHT

LW1111, LW1122, LW1132

General Product Information



WARRANTY



FCC STATEMENT

Tools Required



ELECTRIC DRILL



PHILLIPS-HEAD SCREWDRIVER



FLATHEAD SCREWDRIVER

Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



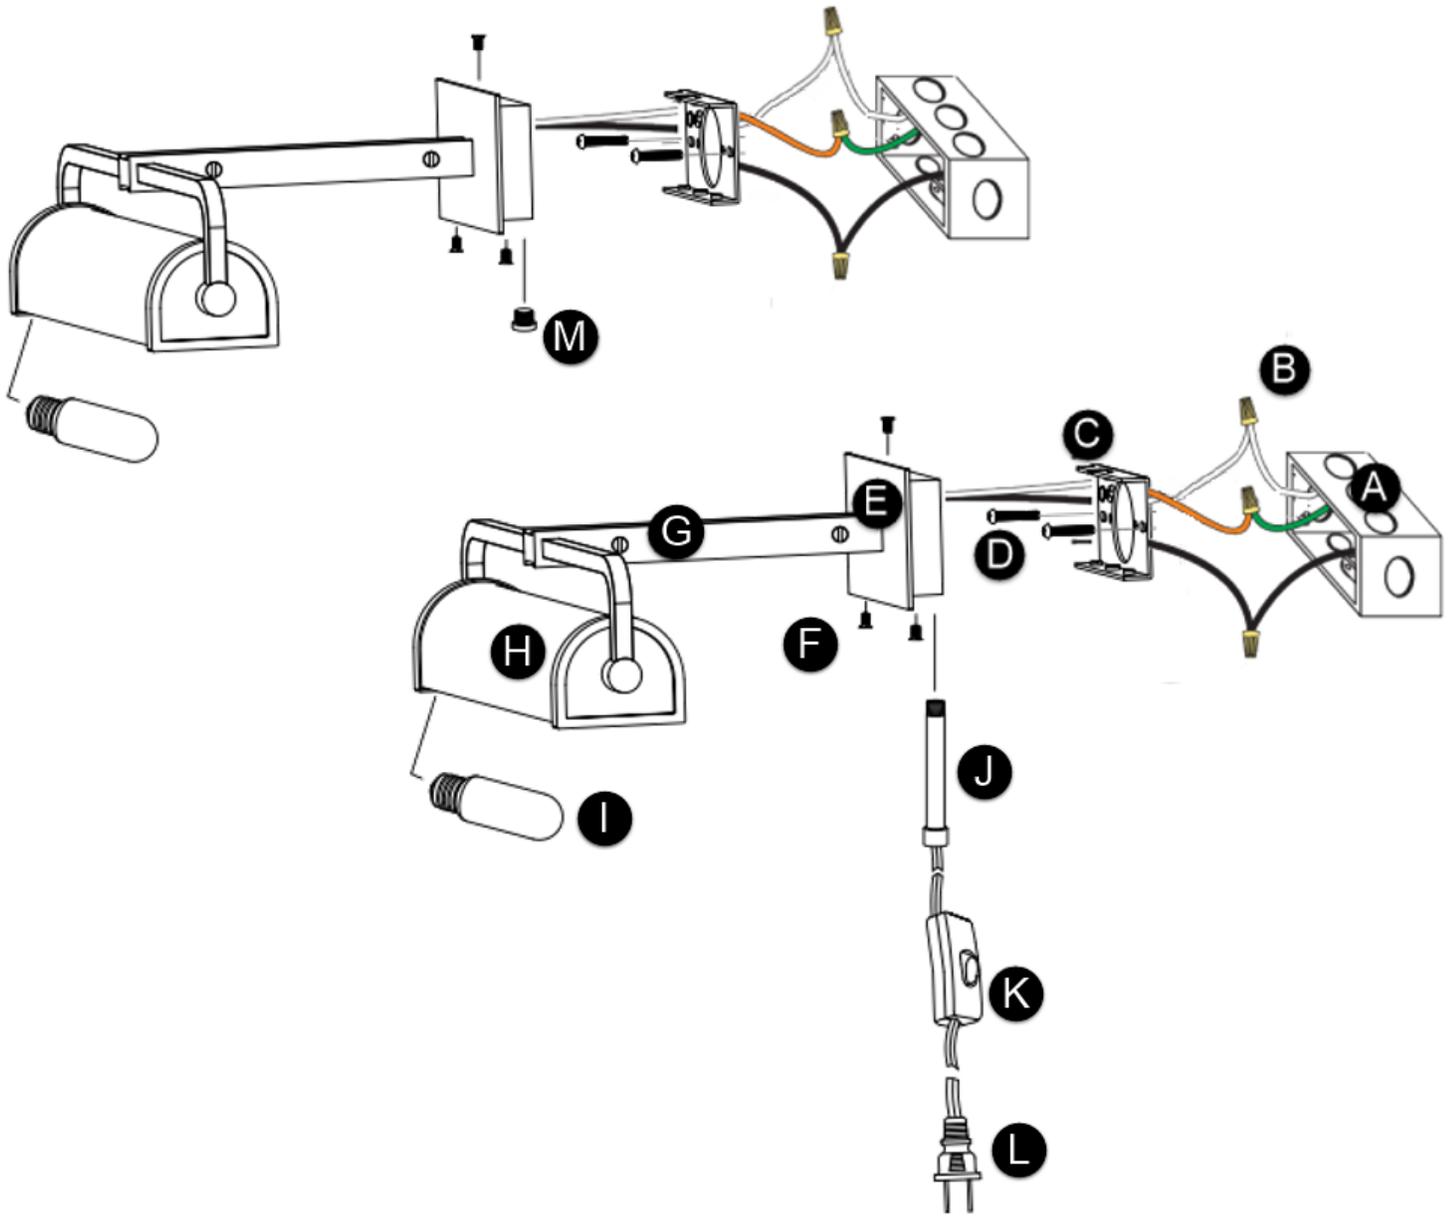

FIXTURE PARTS

- | | | | |
|---|----------------------|------------------------|------------------|
| A. Junction Box | C. Mounting Plate | G. Fixture Arm | K. Inline Switch |
| B. Wires and Wire Nuts | D. Mounting Screws | H. Lamp Shade | L. Plug |
| Please Note: The junction box, wires, and wire nut connections shown in the drawing irrelevant to the plug-in cord installation. In this scenario, A & B will be replaced by the wall (not shown) the fixture will be installed on. | E. Base Plate | I. Bulb (Not Included) | M. Cap Nut |
| | F. Base Plate Screws | J. Stem | |

INSTRUCTIONS

Junction Box Mounting

I. Preparing the Fixture

1. Separate the mounting plate from the base plate by removing the fixture screws.
2. Install the mounting plate to the junction box.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. Disconnect the cord from the fixture wires by removing the wire nuts.
3. Carefully pull the cord out of the fixture.
4. Close the cord hole using the provided fixture plug.
5. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
6. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black) and hot power line wire from the junction box (hot to hot)
 - b) Neutral fixture wire (white) and neutral power line wire from the junction box (neutral to neutral)
7. Carefully tuck all the wires behind the mounting plate into the junction box.

III. Installing the Fixture

1. Mount the fixture onto the mounting plate and secure it in place by tightening the fixture screws.
2. Screw the bulb into the socket, referring to the label on the socket for Max Wattage information.

Or

Plug-In Cord Mounting

I. Preparing the Fixture

1. Separate the mounting plate from the fixture base by removing the fixture screws.
2. Install the mounting plate to the wall.

II. Installing the Fixture

1. Affix the stem onto the fixture base.
2. Secure the fixture base onto the mounting plate using the fixture screws.
3. Screw the bulb into the socket, referring to the label on the socket for Max Wattage information.
4. Plug in the cord to nearby electrical socket.
5. Turn switch on/off to test.