


ASSEMBLY & INSTALLATION INSTRUCTIONS

A984

Pangea Linear Pendant - 131097

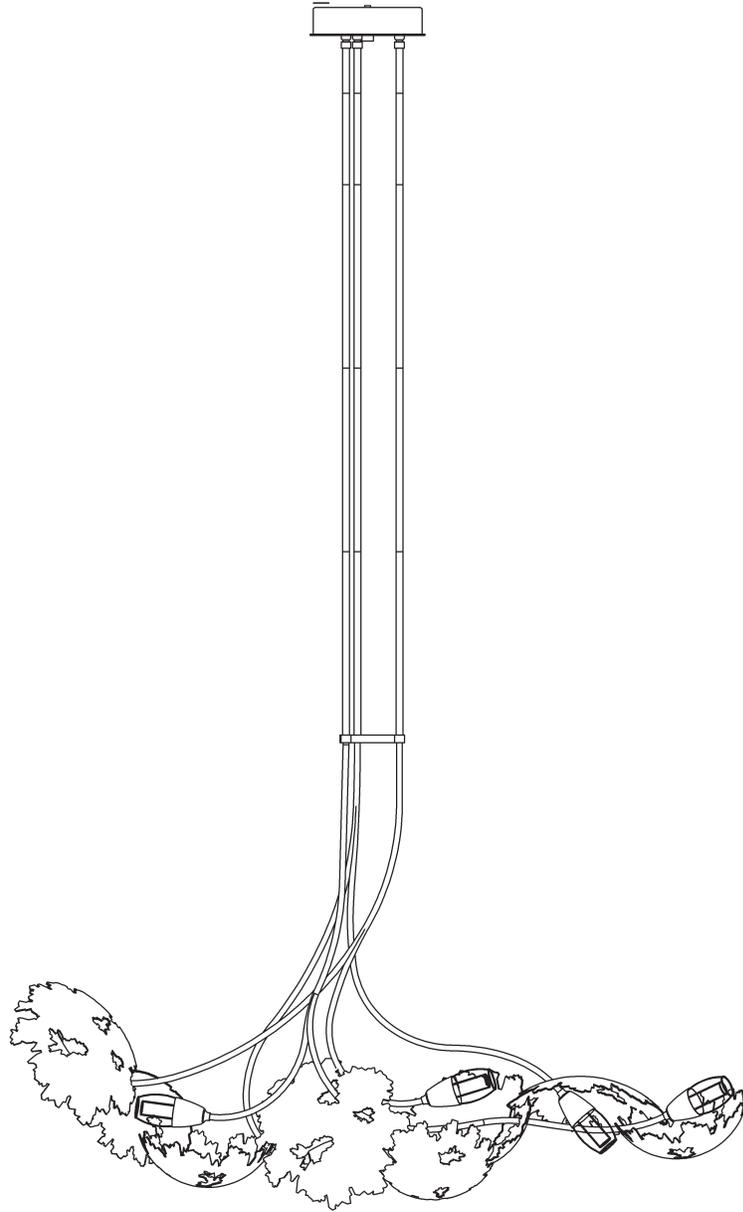

HUBBARDTON FORGE.

MODERN AMERICAN BLACKSMITHS | FINE, HAND CRAFTED LIGHTING
CASTLETON, VERMONT USA | HUBBARDTONFORGE.COM

Component Parts

- A Fixture**
- B Swivel (3)**
- C 3" Fixture Pipe (3)**
- D 6" Fixture Pipe (3)**
- E 12" Fixture Pipe (9)**
- F Stem Nipple (15)**
- G Canopy Plate**
- H Hex Nut (1)**
- I Lock Washer (9)**
- J Canopy**
- K Canopy Nipple**
- L Socket (6)**
- M Glass (6)**
- N Bulb (6) - *Not Included***
- O Bracket (3)**
- P Nut (6)**
- Q Swivel Nipple (3)**
- R Canopy Plate Cap**



ASSEMBLY & INSTALLATION INSTRUCTIONS

A984

Pangea Linear Pendant - 131097

CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

Assemble Fixtures *(Figure 1 - on following page)*

1. Carefully unpack fixture (A) from the carton.
2. Locate fixture pipes (C, D, E), fixture (A), stem nipples (F) . Stem nipples (F) can be found in the kit bag.
3. Provided are multiple fixture pipes in three different lengths. Choose the combination that will achieve overall height desired. Refer to table below to determine pipes required to reach desired overall height. Once you have determined components necessary, feed wires that exit fixture (A) through individual components. Wires will slip easier through loose components than through pipes and nipples that are pre-assembled. Once wires are run, apply thread locking compound to all the connection points and assemble the pipes and nipples.

		Overall Height of Fixture													
		39.7	42.7	45.7	48.7	51.7	54.7	57.7	60.7	63.7	66.7	69.7	72.7	75.7	78.7
# of Pipes Required	3" Pipe (C)		1		1		1		1		1		1		1
	6" Pipe (D)	1	1			1	1			1	1			1	1
	12" Pipe (E)			1	1	1	1	2	2	2	2	3	3	3	3


NOTE: APPLICATION OF THE THREAD LOCKING COMPOUND IS NECESSARY TO PREVENT THE PIPE FROM LOOSENING DURING REGULAR MAINTENANCE AND CLEANING OF THE FIXTURE. BE CERTAIN TO APPLY THE COMPOUND.

4. Slip wires from the fixture (A) through assembled swivel (B) and thread swivel into fixture.
5. Repeat repeat steps 3 & 4 for remaining fixture stems.
6. Locate and remove canopy plate cap (R) then carefully remove canopy plate (G).
7. Remove nuts (P) from brackets (O) to detach brackets (O) from canopy (J).
8. Remove swivel nipples (Q) and lock washers (I) from swivels (B).
9. Attach swivels (B) to brackets (O) using swivel nipples (Q) and lock washers (I).
10. Connect brackets (O) to canopy (J) using nuts (P).

ASSEMBLY & INSTALLATION INSTRUCTIONS

A984

Pangea Linear Pendant - 131097

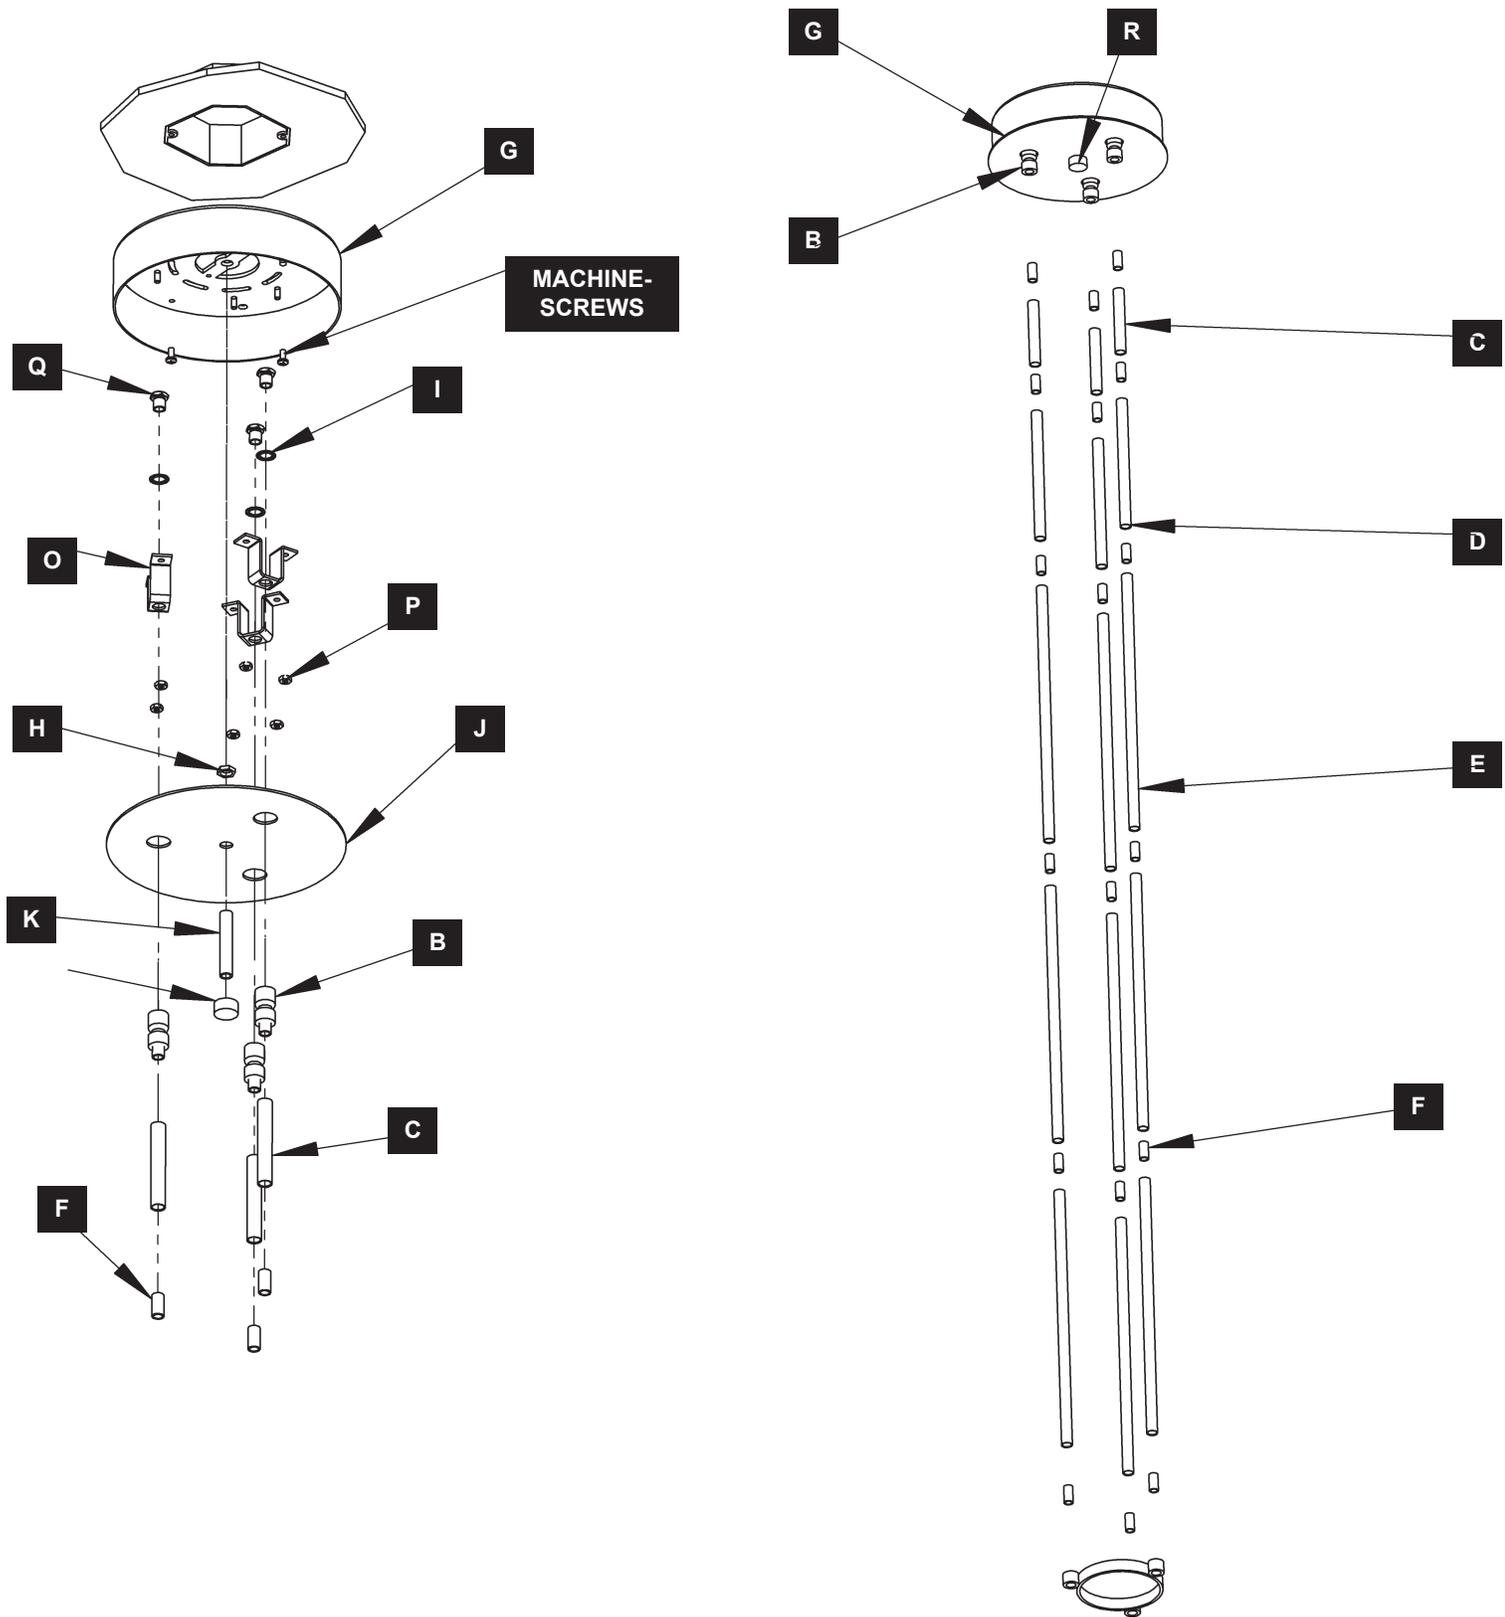

(Figure 1)

(Figure 2)



HUBBARDTON FORGE.

MODERN AMERICAN BLACKSMITHS | FINE, HAND CRAFTED LIGHTING
CASTLETON, VERMONT USA | HUBBARDTONFORGE.COM

ASSEMBLY & INSTALLATION INSTRUCTIONS

A984

Pangea Linear Pendant - 131097

To Install Fixture *(Figure 2 - on previous page)*

1. Raise fixture (A) and position canopy (J) over electrical box. Using two machine screws (not provided) fasten the canopy (J) to the electric box.
2. Lift canopy plate (G) with fixture (A) up to canopy (J) to prepare to connect wires.
3. Using suitable wire connectors (not provided) connect fixture wires to supply wires (white to white or black to black). Connect all ground wires (bare copper or green to bare copper or green).

CAUTION: INSTALLER MUST ENSURE THAT THE MOUNTING METHOD IS CAPABLE OF SUPPORTING THE WEIGHT OF THE FIXTURE.

4. Raise canopy plate (G) to canopy (J) and secure with canopy plate cap (R) .
5. Follow instructions on following page to install glass.


CAUTION: MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY, AND NO BARE WIRE IS EXPOSED.

CAUTION: BE SURE NO WIRES ARE PINCHED BETWEEN THE CANOPY AND CANOPY PLATE.

Pangea Linear Pendant - 131097

Install Glass (Figure 3)

1. Carefully unpack glass (M).
2. Install bulb (N), not included, into socket (L) then thread glass (M) onto socket (L).
3. Repeat steps for remaining glass (M) and socket (L)
4. Restore electricity at main breaker.

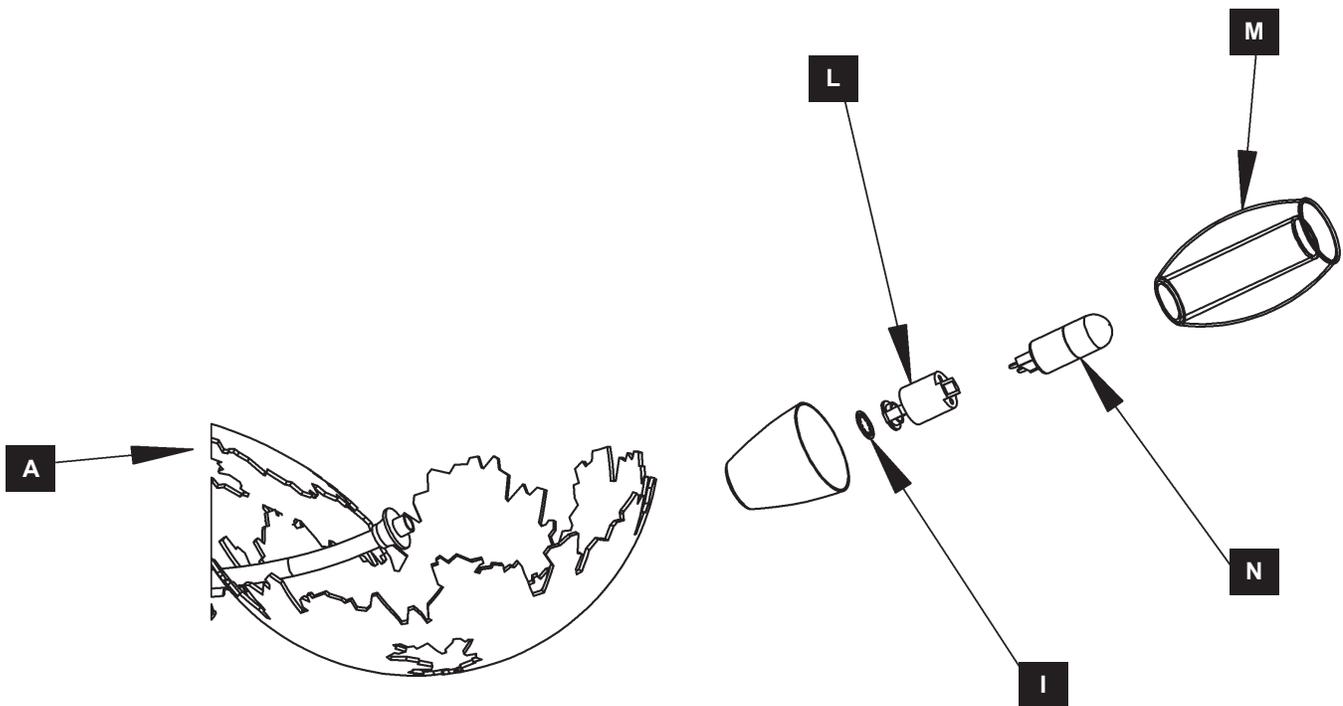

(Figure 3)

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

*** Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.**