


TORIAN SMALL PENDANT


SLP1001

General Product Information


Please visit www.visualcomfort.com for product specs.




ETL
US
Intertek




SAVE THESE
INSTRUCTIONS!




STANDARD
INSTALLATION




INDOOR




NEC COMPLIANT
JUNCTION BOX




DAMP LOCATION
SAFE




BULB(S)
(NOT INCLUDED)




CONVERTS TO LED



ADAPTABLE TO
SLOPED CEILINGS



CLEAN WITH SOFT,
DRY CLOTH ONLY. NO
HARSH CHEMICALS!



BEST PRACTICE:
HANDLE FIXTURE
WITH GLOVES




Product Warranty



FCC Statement

Suggested/Required Tools




ELECTRIC DRILL



PHILLIPS-HEAD
SCREWDRIVER



WIRE CUTTER



MEASURING TAPE

Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

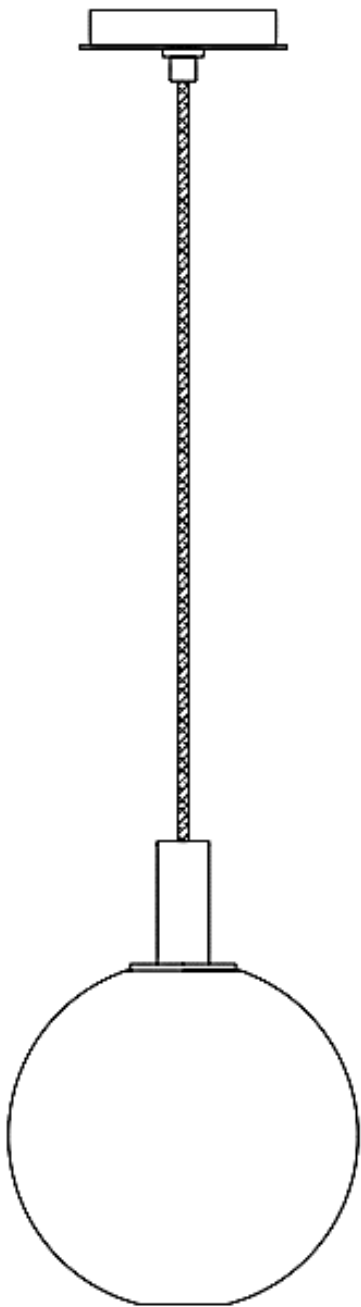

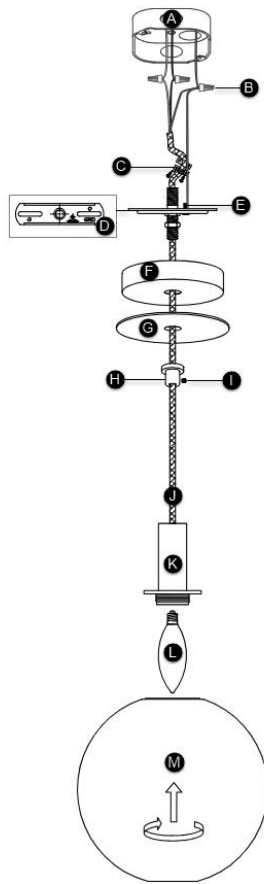

FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Secondary Strain Relief with Screws
- D. Ground Screw
- E. Mounting Bar with Threaded Rod & Mounting Screws (Not Illustrated)
- F. Canopy
- G. Cover Plate
- H. Primary Strain Relief with Collar Nut
- I. Slot Screw
- J. Fixture Cord
- K. Socket/Socket Assembly
- L. Bulb (Not Included)
- M. Glass Globe Shade

INSTRUCTIONS

I. Preparing the Fixture

1. Carefully, unbox and examine all the items included in the packaging of the pendant.
2. Do the following to determine the ideal cord height for the pendant:
(Tip: Measure the distance from the bottom of the fixture to the top of the canopy, then subtract the ceiling height from that measurement; this will provide the necessary cord length needed to hang the pendant at the correct height.)
 - a) Locate the slot screw on the primary strain relief of the pendant cord. Loosen (do not remove) the slot screw. Once removed, it is difficult to put back into place and easily lost.
 - b) Adjust the cord height by moving the cord up or down the primary strain relief. Determine, measure, and mark the cord length.
 - c) Cut the cord at the marked location to suit aesthetic needs.
3. Feed the fixture cord through the primary strain relief with collar nut, cover plate, canopy, threaded rod with attached mounting bar, and secondary strain relief. Then tighten the screws on the secondary strain relief.
4. Lift the fixture to the ceiling location and secure the connected mounting bar to the junction box using the mounting screws.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire to hot power line wire
 - b) Neutral fixture wire to neutral power line wire
4. Carefully tuck all the wires behind the mounting bar into the junction box.

III. Installing the Fixture

1. Push the canopy and cover plate up the threaded rod and against the mounting bar. Secure it in place by screwing the primary strain relief with the attached collar nut tightly onto it. Then tighten the slot screw.
2. Screw the glass globe shade to the socket assembly to complete installation.
3. Then screw the bulb into the socket. Refer to the socket label for max wattage information.