


### STUDIO COLLECTION

# TORIAN EXTRA LARGE AND LARGE CHANDELIERS

SLC1036; SLC1044



Please visit <u>www.visualcomfort.com</u> for product specs.



























# **Tools Required**







# **Safety Information**

### **CAUTION-RISK OF FIRE**


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


# USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

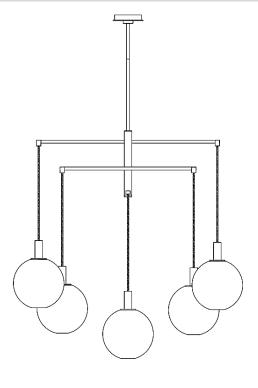

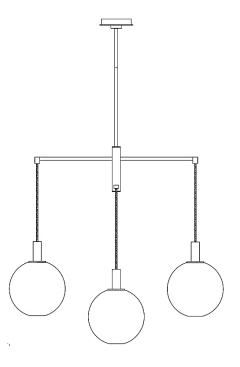

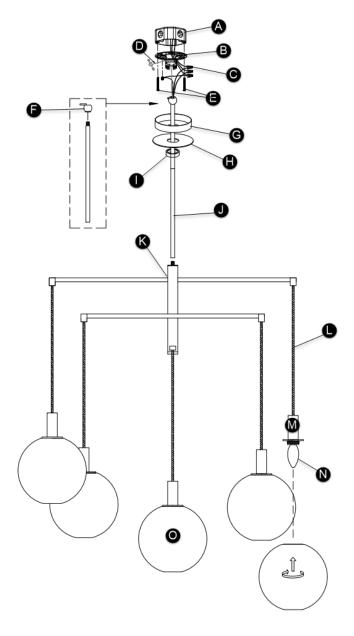

# **FIXTURE PARTS**

- A. Junction Box
- B. Mounting Plate
- C. Wire Nuts
- D. Support Cable
- E. Mounting Screws
- F. Half Ball/Swivel
- G. Canopy
- H. Canopy Plate
- I. Collar Nut
- J. Stem Assembly
- K. Fixture Base
- L. Fixture Cord
- M. Socket Base/Socket
- N. Bulb (Not Included)
- O. Glass Globe Shade

### **INSTRUCTIONS**

### I. Preparing the Fixture

- 1. Screw the half ball to the top stem.
- 2. Screw the stems together to the desired length.
- 3. Feed the fixture wires and support cable from the fixture base through the stem assembly and screw stem assembly and fixture base together.
- 4. Continue feeding the fixture wires and support cable through the collar nut, canopy plate and canopy, and half ball assembly; then screw the half ball assembly onto the stem assembly.
- 5. Secure the mounting plate to the junction box, then slide the half ball assembly onto the mounting plate.
- 6. Loop and secure the support cable over a stable structure that agrees with the local building code.

### II. Wiring the Fixture

- 1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
- 2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
- 3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire (black, smooth) and hot power line wire from the junction box (hot to hot)
  - b) Neutral fixture wire (white, textured) and neutral power line wire from the junction box (neutral to neutral)
- 4. Carefully tuck all wires into the junction box.

### III. Installing the Fixture

- 1. Slide the canopy and canopy plate over the mounting plate and secure it in place with the collar nut.
- 2. Install light bulbs into the sockets. Refer to the label on the socket for max wattage information.
- 3. To complete the installation, install the shades onto the socket base.