





VIOTA LANTERNS


EC1353; EC1364; EC1344

General Product Information

Please visit www.visualcomfort.com for product specs.



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

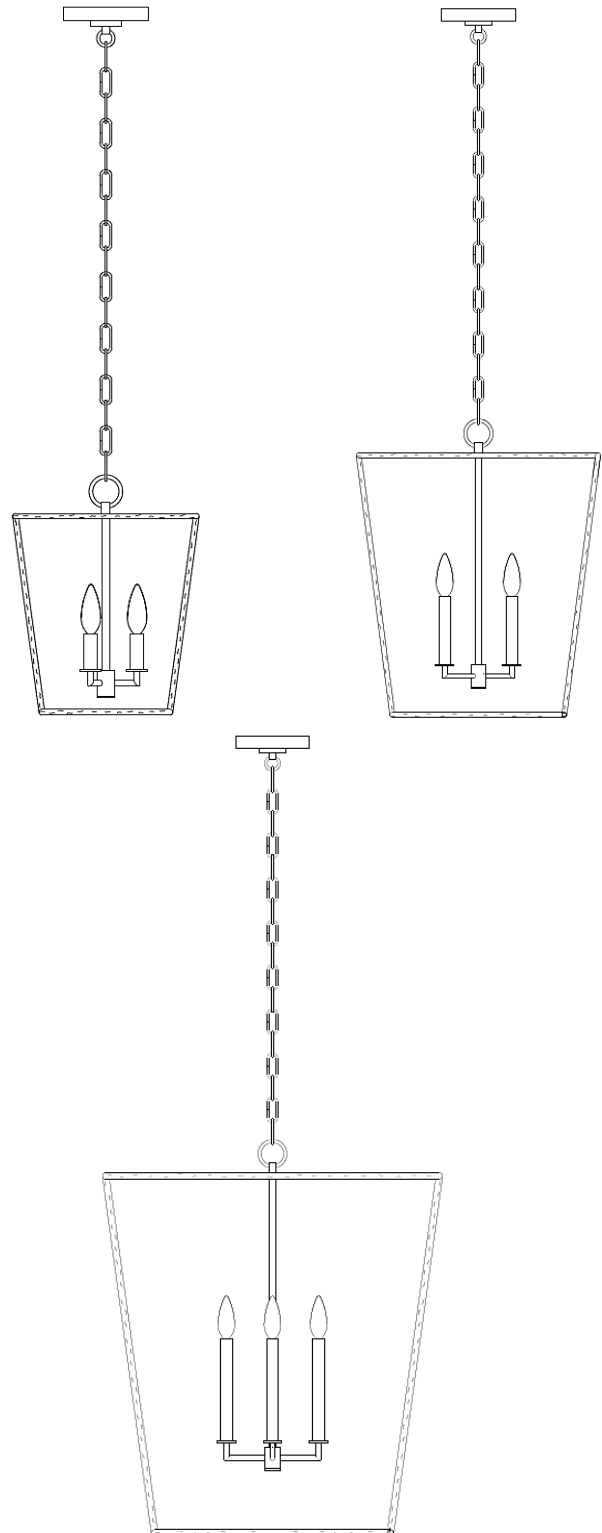

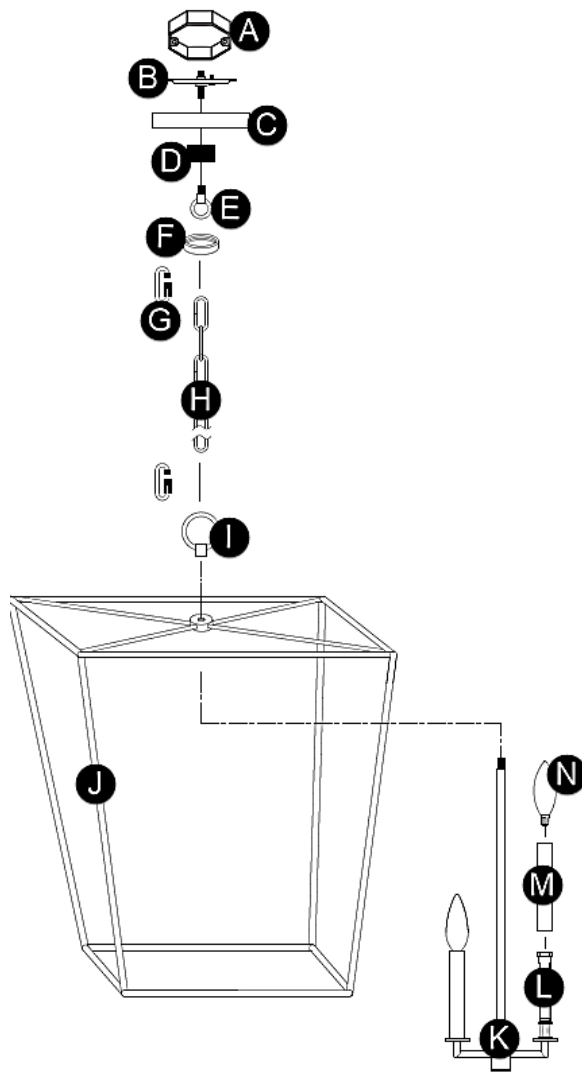

FIXTURE PARTS

- A. Junction Box & Wire Nut Connections (Not Illustrated)
- B. Mounting & Mounting Screws (Not Illustrated)
- C. Canopy
- D. Screw Collar
- E. Canopy Loop
- F. Collar Nut
- G. Quick Links
- H. Chain
- I. Fixture Loop
- J. Fixture Frame
- K. Fixture Stem
- L. Sockets
- M. Candle Tube
- N. Bulbs (Not Included)

INSTRUCTIONS

I. Preparing the Fixture

1. Secure the mounting plate to the junction box.
2. Feed the fixture wires from the socket assembly through the center hole of the fixture frame and the fixture loop.
3. Insert the stem of the socket assembly through the center hole of the fixture frame.
4. Secure the fixture loop on the fixture frame.
5. Determine the desired height of the fixture and adjust the chain accordingly by doing the following:
 - a) Remove a portion of the chain by opening a link with pliers.
 - b) Install the bottom end of chain onto the fixture loop using a quick link.
 - c) Unscrew the collar nut from the screw collar and slide it onto the chain, followed by the canopy.
 - d) Then install the chain onto the canopy loop with a quick link.
6. Weave the cord through the chain, collar nut, canopy loop, canopy, and out of the junction box.
7. Trim the cord, leaving enough length to make electrical connections.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire to hot power line wire
 - b) Neutral fixture wire to neutral power line wire
4. Carefully tuck all the wires behind the mounting bar into the junction box.

III. Installing the Fixture

1. Place the canopy onto the mounting plate and secure it in place by screwing the collar nut tightly onto it.
2. Install the candle tubes over the sockets.
3. Screw the lamps into the sockets to finish. Refer to the socket labels for max wattage information.