



## RIDGEWOOD LARGE & X-LARGE CHANDELIERS

CC1776; CC1786

### General Product Information



### Suggested/Required Tools



### Safety Information

#### CAUTION-RISK OF FIRE



This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

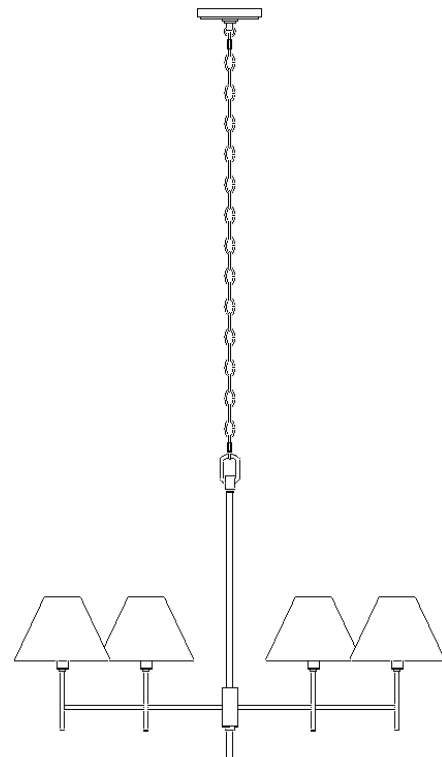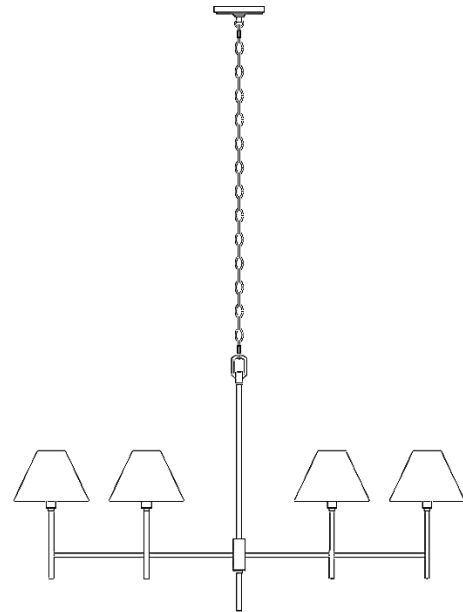

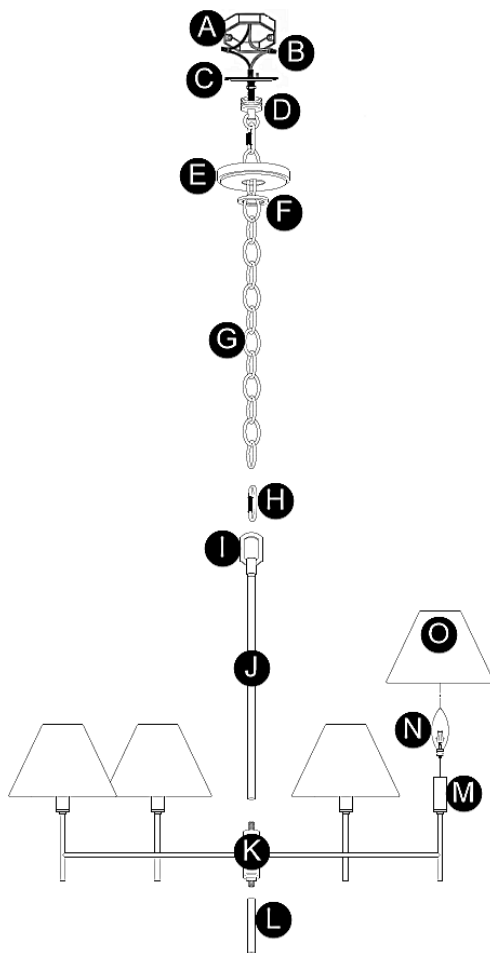

## FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Plate & Mounting Screws (Not Illustrated)
- D. Screw Collar/Canopy Loop
- E. Canopy
- F. Collar Ring
- G. Chain
- H. Quick Link
- I. Fixture Loop
- J. Fixture Stem
- K. Hub
- L. Bottom Stem
- M. Sockets
- N. Bulbs
- O. Shades

## INSTRUCTIONS

### I. Preparing the Fixture

1. Feed the fixture wires from the hub through the fixture stem and fixture loop.
2. Screw the fixture stem to the hub securely.
3. Determine the desired overall length and amount of chain needed. Shorten the chain using pliers.
4. Attach the chain to the fixture loop using a quick link. Secure the quick link.
5. Loosen the collar ring and slide it down the chain carefully with the canopy.
6. Secure the mounting bar to the junction box, then attach the chain to the canopy loop with a quick link.
7. Thread the fixture wire and the ground wire through the chain. **Note:** When you reach the screw collar/canopy loop, ensure there is no tension on the wires. Cut the excess wires, being sure to leave about 12" to reach the junction box.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire (black, smooth) to hot power line wire
  - b) Neutral fixture wire (white, textured) to neutral power line wire
4. Carefully tuck all the wires into the junction box.

### III. Installing the Fixture

1. Slide the canopy over the mounting bar and secure it in place with the collar ring.
2. Screw the bottom stem onto the hub.
3. Install the bulbs into the sockets. Refer to the socket label for max wattage information.
4. Install the shades onto the shade base.