






PIERCE MEDIUM, LARGE, & X-LARGE PENDANTS

CP1456; CP1466; CP14710

General Product Information

Please visit www.visualcomfort.com for product specs.



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



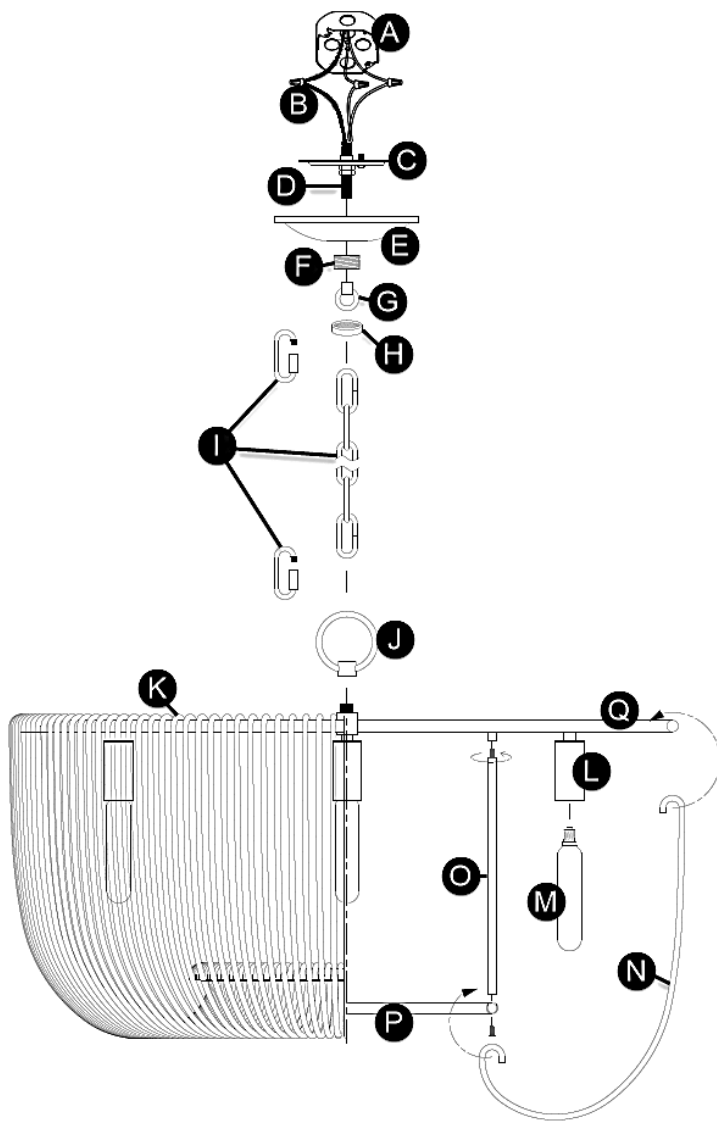

FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Bar & Mounting Screws
(Not Illustrated)
- D. Threaded Nipple
- E. Canopy
- F. Screw Collar
- G. Canopy Loop
- H. Collar Nut
- I. Quick Links & Chain
- J. Fixture Loop
- K. Fixture Cage Assembly
- L. Sockets
- M. Bulbs (Not Included)
- N. Decorative Bars
- O. Frame Bar & Set Screw
- P. Bottom Frame
- Q. Top Frame

INSTRUCTIONS

I. Preparing the Fixture

1. If necessary, screw the short end of the threaded nipple tightly to the mounting bar. Screw the screw collar and canopy loop onto the threaded nipple.
2. Secure the mounting bar to the junction box.
3. Feed the fixture wires through the fixture loop and screw the fixture loop on the top of the fixture.
4. Determine the desired overall length and amount of chain needed. Shorten the chain using pliers. Keep the extra chain.
5. Connect the chain to the fixture loop using a quick link.
6. Unscrew the collar nut from the screw collar and slide it and the canopy down the chain gently.
7. Attach the chain to the canopy loop with a quick link.
8. Weave the fixture wires through the chain, collar nut, and canopy, then through the threaded nipple.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black, smooth) to hot power line wire from the junction box (hot to hot)
 - b) Neutral fixture wire (white, textured) to neutral power line wire from the junction box (neutral to neutral)
4. Carefully tuck all the wires into the junction box.

III. Installing the Fixture

1. Place the canopy onto the mounting bar and secure it in place by screwing the collar nut tightly onto the mounting bar.
2. Install the light bulbs into the sockets. Refer to the socket label for max wattage information.
3. Screw the frame bar onto the top frame, then secure it to the bottom frame with the set screw.
4. Hook the cage bars onto the top and bottom frames.