



DANICA MEDIUM & LARGE CHANDELIERS

TC1194; TC1224



General Product Information

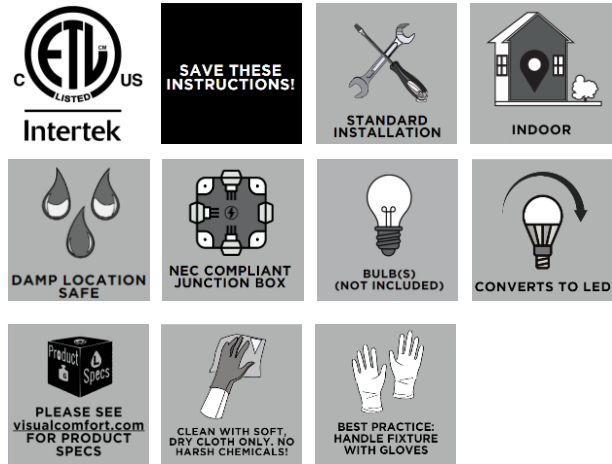


Tools Required



Safety Information

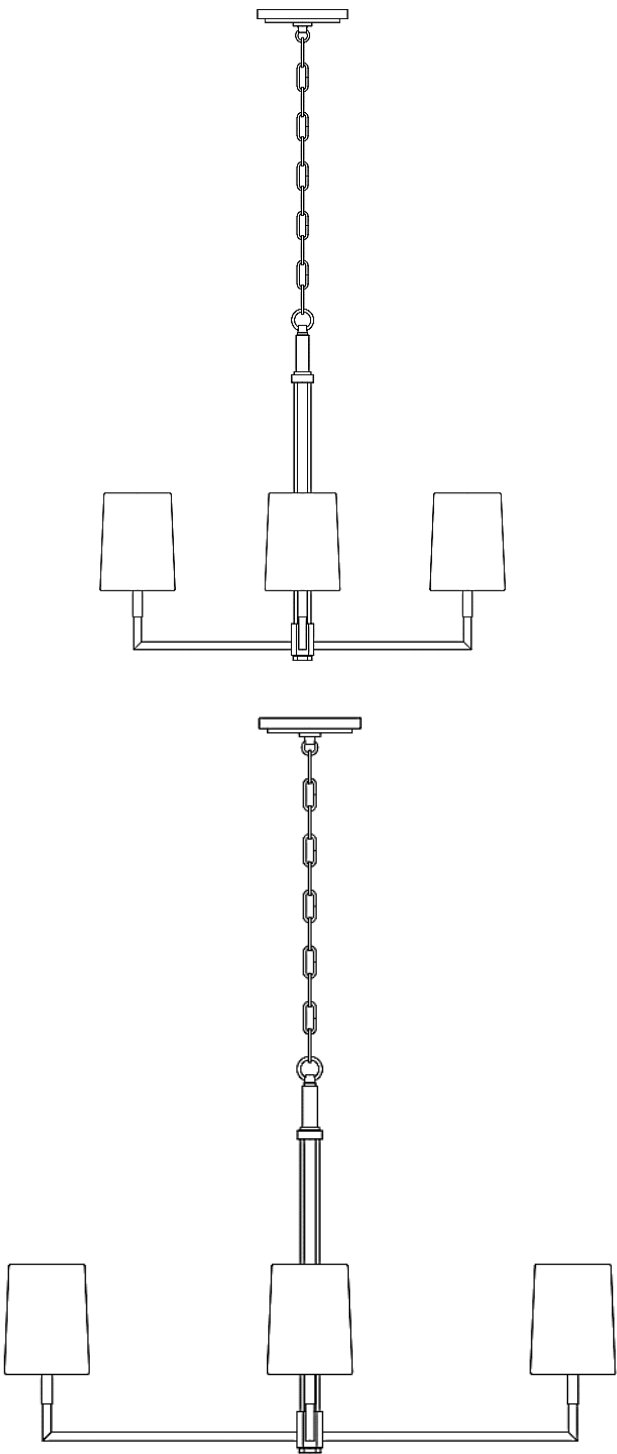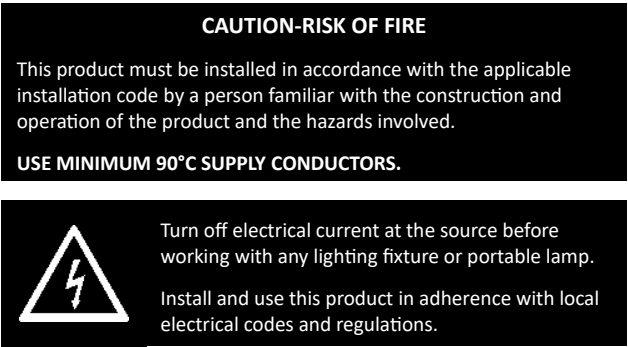

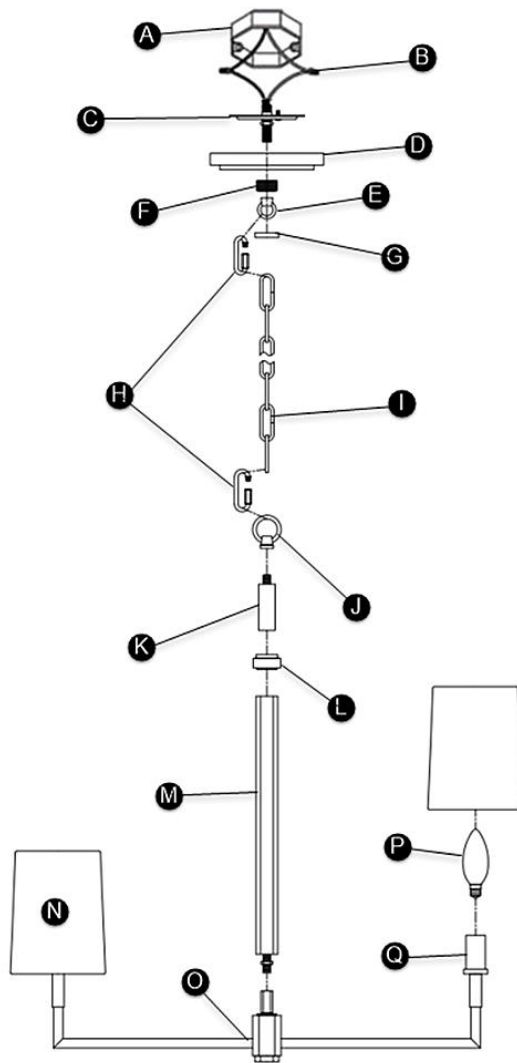

FIXTURE PARTS

- A. Junction Box
- B. Wire Nuts
- C. Mounting Bar
- D. Canopy
- E. Canopy Loop
- F. Screw Collar
- G. Collar Nut
- H. Quick Links
- I. Chain
- J. Fixture Loop
- K. Upper Stem
- L. Spacer
- M. Stem
- N. Shade
- O. Fixture Base
- P. Bulb (Not Included)
- Q. Socket

INSTRUCTIONS

I. Preparing the Fixture

1. If necessary, install the screw collar and canopy loop on the threaded pipe of the mounting bar. Secure the mounting bar to the junction box.
2. Feed the fixture wires from the socket assembly through the threaded pipe of the fixture stem, spacer, upper stem and the fixture loop.
3. Install the threaded pipe on the socket assembly. Slide the fixture stem and the spacer over the threaded pipe. Then secure them with the upper stem.
4. Secure the fixture loop on the fixture assembly.
5. Determine the desired height of the fixture and adjust the chain accordingly by doing the following:
 - a) Remove a portion of the chain by opening a link with pliers.
 - b) Install the bottom end of chain onto the fixture loop using a quick link.
 - c) Unscrew the collar nut from the screw collar and slide it onto the chain, followed by the canopy.
 - d) Then install the chain onto the canopy loop with a quick link.
6. Weave the cord through the chain, collar nut, canopy loop, canopy, and out of the junction box.
7. Trim the cord, leaving enough length to make electrical connections.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black, smooth) and hot power line wire from the junction box (hot to hot)
 - b) Neutral fixture wire (white, textured) and neutral power line wire from the junction box (neutral to neutral)
4. Carefully tuck all wires into the junction box.

III. Installing the Fixture

1. Slide the canopy over the mounting bar and secure it in place with the collar nut.
2. Install light bulbs into the sockets.
3. Install the shades onto the light bulb.