


DANICA LARGE HANGING SHADE

TC1206

General Product Information

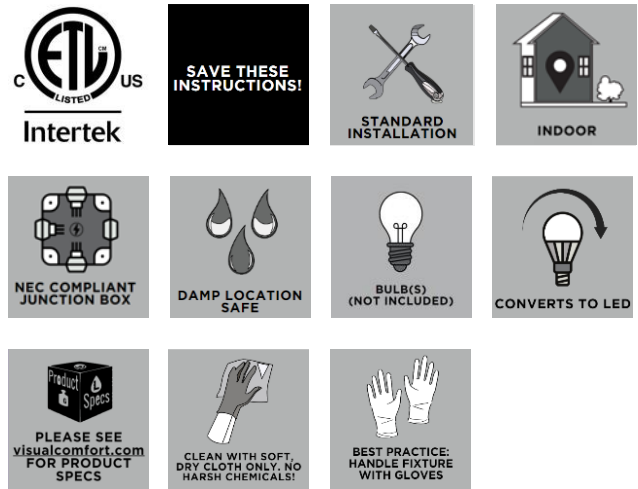

Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

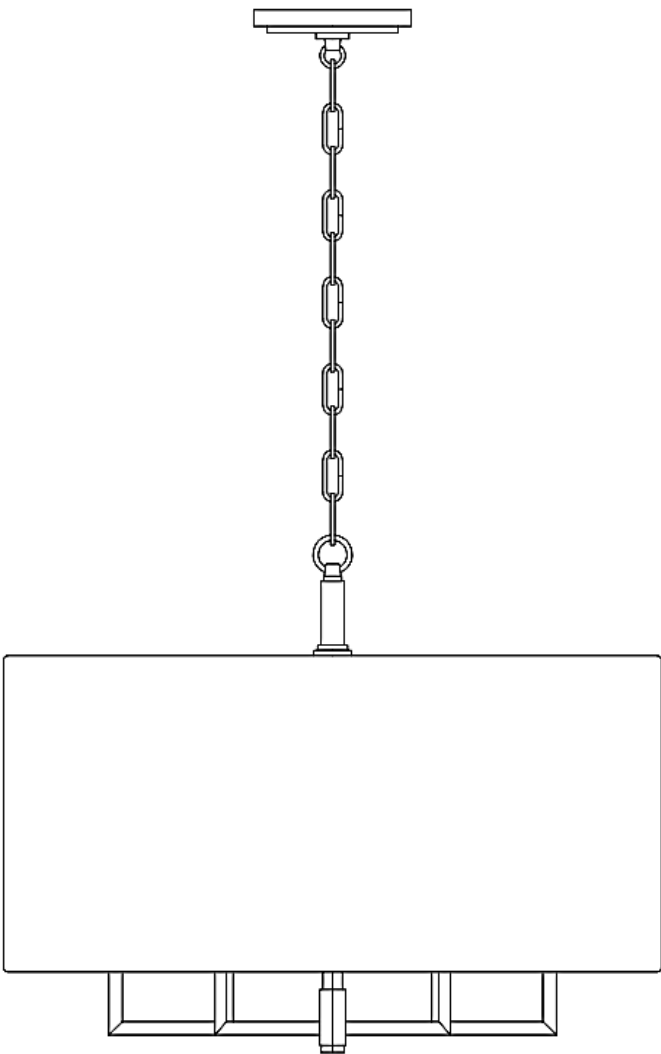

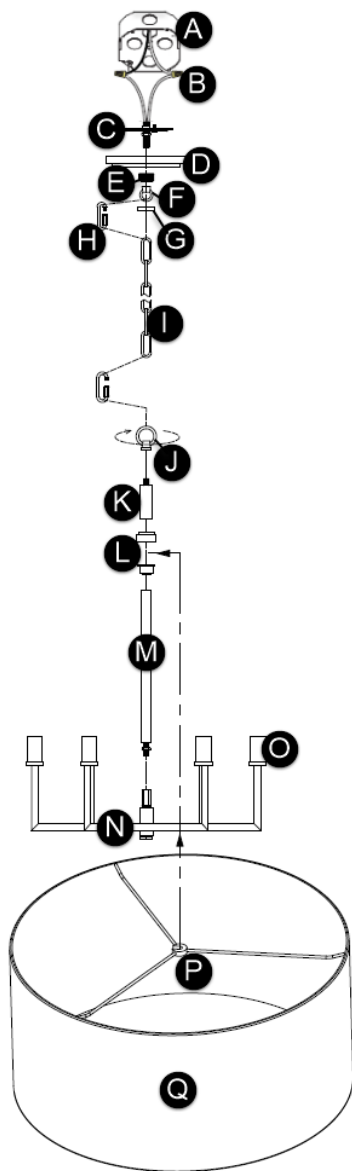

FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Bar & Mounting Screws (Not Illustrated)
- D. Canopy
- E. Screw Collar
- F. Canopy Loop
- G. Collar Nut
- H. Quick Links
- I. Chain
- J. Fixture Loop
- K. Upper Stem
- L. Shade Fasteners
- M. Stem
- N. Fixture Base
- O. Sockets
- P. Shade Spider
- Q. Shade
- R. Bulbs (Not Included; Not Illustrated)

INSTRUCTIONS

I. Preparing the Fixture

1. Determine the desired overall length and amount of chain needed. Shorten the chain using pliers. Keep the extra chain.
2. Feed the fixture wires from the fixture base through the stem and through the shade fastener, upper stem, and fixture loop.
3. Install the stem on the top of the fixture base.
4. Insert the shade from the shade spider in between the shade fasteners. Tighten all of the parts with the upper stem.
5. Attach the fixture loop to the upper stem and hook one of the quick links to the fixture loop on one end and the chain onto the other.
6. Weave the wires through the chain and feed the chain and wires through the collar nut and the canopy.
7. Secure the mounting bar to the junction box. If necessary, screw the canopy loop and the screw collar onto the mounting bar.
8. Attach the chain to the canopy loop using the quick link. Secure the quick link.
9. Thread the fixture wires and ground wire through the chain. **Note: When you reach the screw collar, ensure there is no tension on the wires. Cut the excess wires, being sure to leave about 12" to reach the junction box.**

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot (black, smooth) fixture wire to hot power line wire
 - b) Neutral (white, textured) fixture wire to neutral power line wire
4. Carefully tuck all the wires into the junction box.

III. Installing the Fixture

1. Slide the canopy over the mounting bar and secure it in place with the collar nut.
2. Install the light bulbs into the sockets.