




BERGEN MEDIUM FLUSH MOUNT

TFF1002

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE



This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

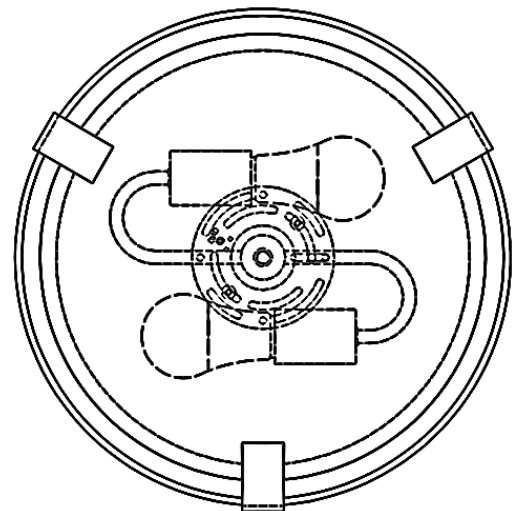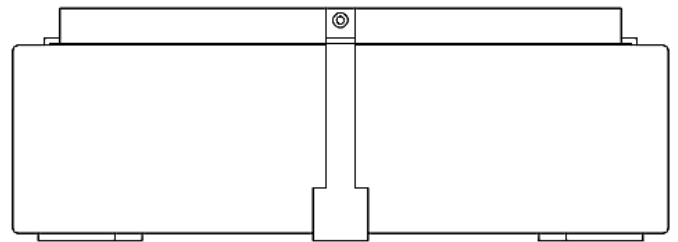

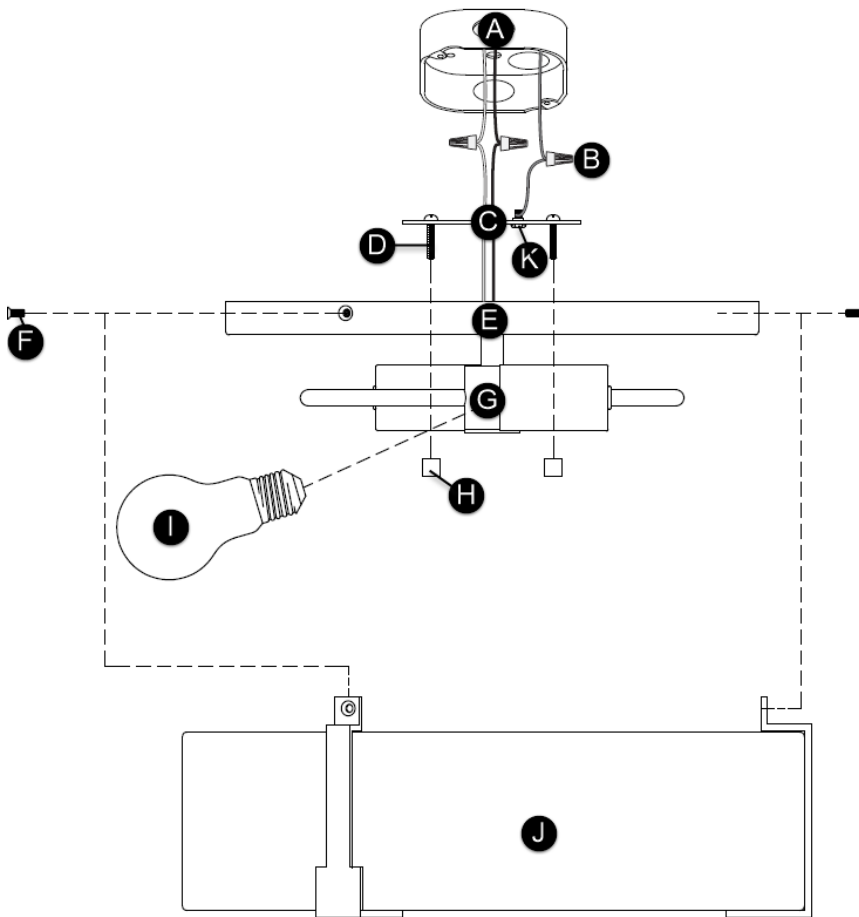

FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Mounting Plate & Mounting Screws (Not Illustrated)
- D. Mounting Studs
- E. Fixture Base
- F. Fixture Screws
- G. Socket Assembly
- H. Cap Nuts
- I. Bulb
- J. Shade
- K. Ground Screw

INSTRUCTIONS

I. Preparing the Fixture

1. Separate the mounting plate from the fixture base.
2. Install the mounting studs with their heads facing the junction box and in alignment with the holes in the fixture base so that they protrude downward.
3. Install the mounting plate to the junction box and secure it using the mounting screws.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire to hot power line wire
 - b) Neutral fixture wire to neutral power line wire
4. Carefully tuck all the wires into the junction box.

III. Installing the Fixture

1. Align the holes in the fixture base with the mounting studs on the mounting plate and push upwards so that they poke through the holes in the fixture base.
2. Secure the fixture base to the mounting plate by screwing the cap nuts on the mounting studs.
3. Screw the bulb into the socket assembly. Refer to the socket label for max wattage information.
4. Secure the shade to the fixture base using the fixture screws to complete installation.