












FULLTON THREE & FIVE-LIGHT CHANDELIERS



3164203; 3164205

General Product Information













Suggested/Required Tools




Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

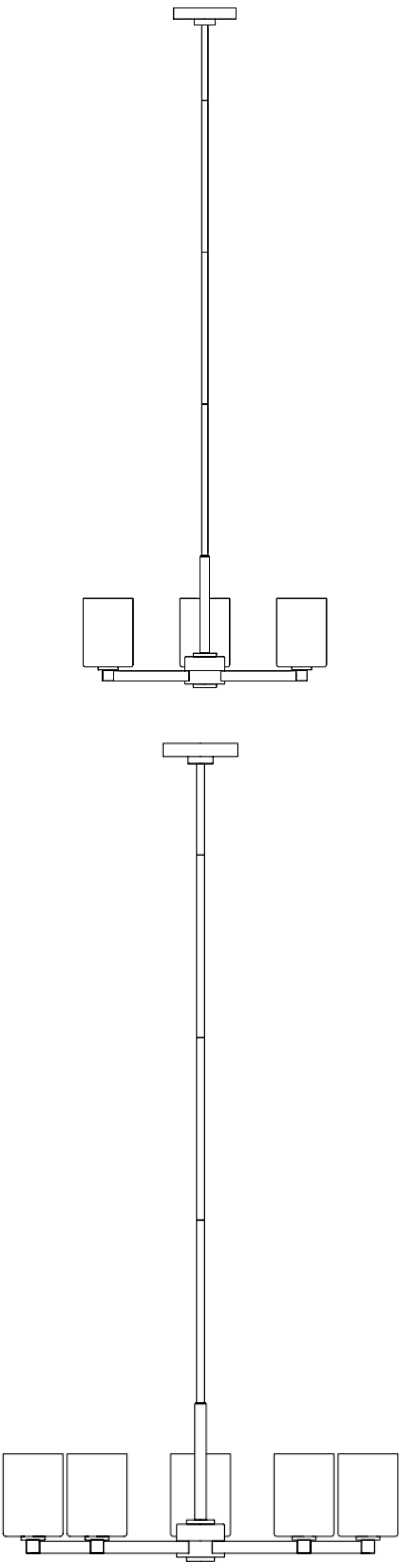

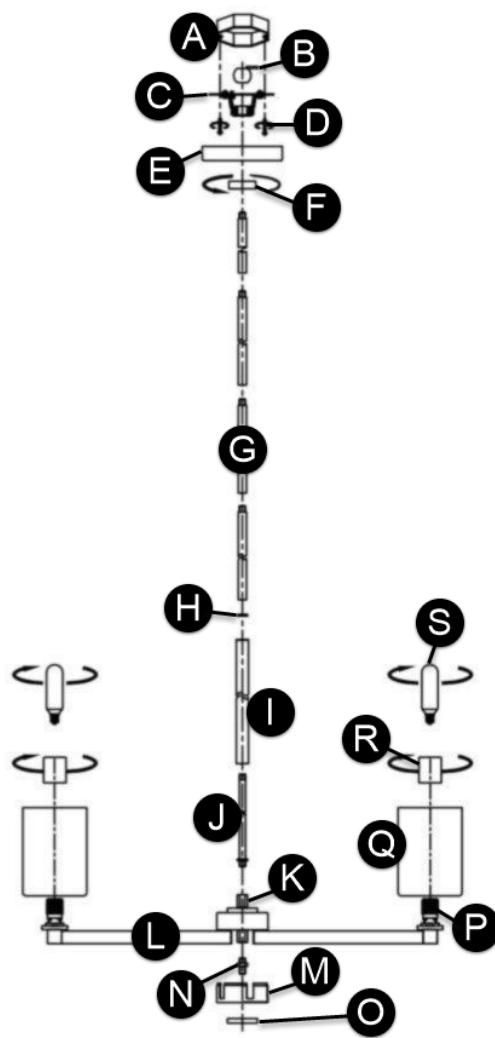

FIXTURE PARTS

- A. Junction Box
- B. Half Ball
- C. Mounting Plate
- D. Mounting Screws
- E. Canopy
- F. Collar Nut
- G. Stem
- H. Washer
- I. Bottom Stem
- J. Threaded Pipe
- K. Coupler
- L. Fixture
- M. Cup
- N. Nipple
- O. Cover
- P. Sockets
- Q. Glass Shades
- R. Socket Rings
- S. Bulbs (Not Included)

INSTRUCTIONS

I. Preparing the Fixture

1. Spread the fixture arms evenly.
2. Screw the nipple to the bottom of the fixture, then place the cup over the nipple and secure it in place by screwing the cover onto the nipple.
3. Feed the fixture wires through the threaded pipe, bottom stem, and washer, then screw the threaded pipe to the top of the coupler. Let the bottom stem slide over the threaded pipe, then install the washer on it.
4. Screw the half ball to the top of the stem.
5. Determine the desired height or look of the fixture with the provided stems, then screw them together to assemble them accordingly.
6. Feed the fixture wires through the stem assembly, then screw the stem assembly onto the bottom stem.
7. Feed the fixture wires through the collar nut, canopy, and the half ball assembly, then screw it onto the stem assembly.
8. Align and secure the mounting plate to the junction box, then slide the half ball assembly onto the mounting plate.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (black/smooth) to hot power line wire
 - b) Neutral fixture wire (white/textured) to neutral power line wire
4. Carefully tuck all the wires into the junction box.

III. Installing the Fixture

1. Place the canopy onto the mounting plate and secure it in place by screwing the collar nut tightly onto it.
2. Secure the glass shades onto the sockets by screwing on the socket rings.
3. Screw the bulbs into the sockets. Refer to the socket label for max wattage information.