

COLEWOOD SMALL, MEDIUM & LARGE PENDANTS

DJP1171; DJP1181; DJP1191

General Product Information



SAVE THESE INSTRUCTIONS!



STANDARD INSTALLATION



INDOOR



DAMP LOCATION SAFE




NEC COMPLIANT JUNCTION BOX




BULB(S) (NOT INCLUDED)



CONVERTS TO LED



PLEASE SEE visualcomfort.com FOR PRODUCT SPECS



CLEAN WITH SOFT DRY CLOTH ONLY. NO HARSH CHEMICALS!



BEST PRACTICE: HANDLE FIXTURE WITH GLOVES




Product Warranty




FCC Statement


Suggested/Required Tools




ELECTRIC DRILL



PHILLIPS-HEAD SCREWDRIVER



PENCIL/MARKER



WIRE CUTTER

Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

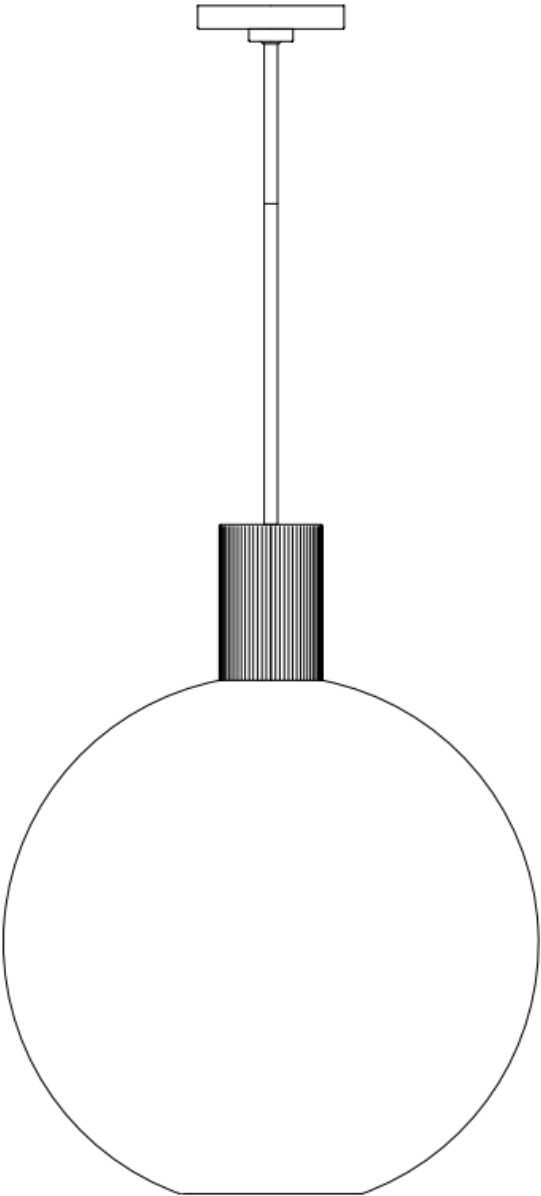

FIXTURE PARTS

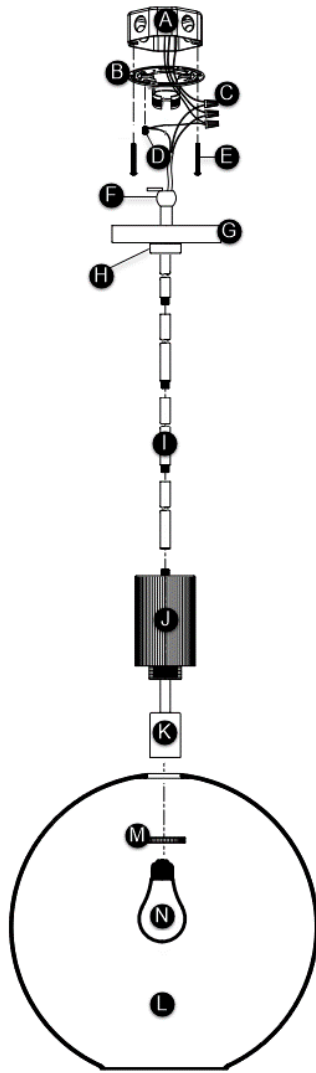

- A. Junction Box
- B. Mounting Plate with Screw Collar
- C. Wire Nut Connections
- D. Ground Screw
- E. Mounting Screws
- F. Half Ball
- G. Canopy
- H. Collar Nut
- I. Stem Assembly
- J. Fixture/Ribbed Cup
- K. Socket Assembly
- L. Milk Glass Globe Shade
- M. Socket Ring
- N. Bulb (Not Included)

INSTRUCTIONS

I. Preparing the Fixture

1. Screw the half ball to the top stem.
2. Determine the desired height of the fixture and complete the stem assembly, accordingly, by screwing the stems together.
3. Feed the fixture wires through the stem assembly, collar nut, canopy, and half ball assembly.
4. Screw the stem assembly on top of the fixture.
5. Lift the fixture stem and slide the half ball assembly onto the screw collar portion of the mounting plate.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire (smooth and black) to hot power line wire
 - b) Neutral fixture wire (white/textured or ribbed) to neutral power line wire
4. Carefully tuck all the wires into the junction box.

III. Installing the Fixture

1. Place the canopy onto the mounting plate and secure it in place by screwing the collar nut tightly onto it.
2. Install the glass globe shade onto the socket assembly and secure it with the socket ring.
3. Screw the bulb into the socket. Refer to the socket label for max wattage information.