


WARNING!



Be sure electrical power is OFF before and during installation or maintenance.
The luminaire must be installed by a qualified electrician, in accordance with all applicable local codes.

Ensure that the rated luminaire voltage requirements are compatible with the available mains supply in which it will be installed.
All LEDs are included in your lamp. Never touch the LED surface with your bare hands as this may reduce the life of your LED.
Do not alter, relocate or remove any electrical component.

REF.	/	Litgh bulb
1462	/	1x E-26
1463	/	1x E-26
1464	/	1x E-26
1594	/	1x E-26
1598	/	1x E-26
1599	/	1x E-26
1607	/	1x E-26
1608	/	1x E-26
1609	/	1x E-26
1515	/	1x E-26
1522	/	1x E-26
1547	/	1x E-26

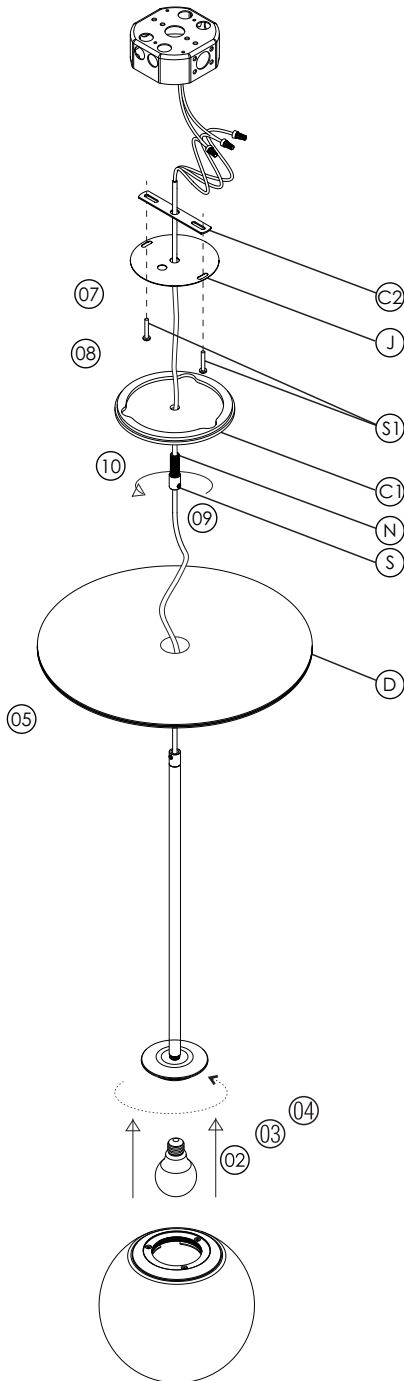

Line: Orbit
Family: Pendant
Description: Orbit Accord Pendant 1462/1463/1464

Material: Natural Wood Veneer, MDF.

Read carefully all the assembling instructions below and turn OFF energy power before starting the installation.

- ① Remove the protecting package from the pieces taking care to not harm any parts with cutting surfaces or objects. Lay the parts of the fixture on some horizontal surface in order to connect them, if needed use the protecting package to soften the surface and protect the parts from getting scratched or harmed.
- ② Remove the diffuser globe by unscrewing it from the metal support, counter clockwise.
- ③ Install the compatible LED mini bulb (A-15) with an E-26 socket, MAX 25W
- ④ Insert the diffuser globe at the support and lock it in place, twisting it clockwise.

MAKING ELECTRICAL CONNECTIONS

- ⑤ Pass the energy cable through the disk (D), through the strain relief (S) screwed in the nipple (N), through the canopy (C1), junction box cover (J) and crossbar (C2).
- ⑥ Make the electrical connections according to all applicable local codes.
- ⑦ Screw the crossbar (C2) and junction box cover (J) in the junction box using the provided screws (S1).
- ⑧ Once the crossbar and junction box cover are fixed in the ceiling, screw the nipple (N) along with the strain relief (S) on it and insert the excess energy cable in the junction box through the strain relief (S).
- ⑨ Once the nipple is fixed on the junction box, screw the strain relief (S) on the nipple until the canopy is fixed and tight against the ceiling.
- ⑩ Adjust the height of the pendant and fasten the strain relief screw to lock the energy cable.

Turn on the energy power, your luminaire is ready for use.

USER GUIDE

The wooden disk (D) on top of the metallic support can be moved and adjusted according to the desired position. Be careful to respect the movement limits of the disk in order to keep it in good conditions for use.

PROVIDED SCREWS



ATTENTION!



FAILURE TO COMPLY WITH THESE INSTRUCTIONS MAY CAUSE ACCIDENTS AND LOSS OF PRODUCT WARRANTY.
It's recommended to read these instructions completely and carefully before proceeding.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

ACCORD Lighting guarantees coverage against manufacturing defects including electrical components and finishes, for a period of three years, under normal use, from the date of purchase. For warranty service, please contact your local dealer for further instructions. Proof of date of purchase will be required for validation of warranty service.

The responsibility of the manufacturer regarding the product warranty is related to the correct observation of the instructions contained in this manual. The manufacturer is not responsible for any damage to the product caused by accidents, alterations of any kind, improper usage or improper installation. See the website for additional warranty details.

ACCORD Lighting reserves the right to change the dimensions and specifications contained in this manual without prior notice, in accordance with its policy of continuous product improvement. Please, contact the manufacturer if additional information is necessary. The illustrations in this manual are for guidance only and may vary in scale, dimensions and model details.