




WELLEN EXTRA LARGE AND LARGE CHANDELIERS

CC1766; CC1755

General Product Information



Tools Required/Suggested



Safety Information

CAUTION-RISK OF FIRE



This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

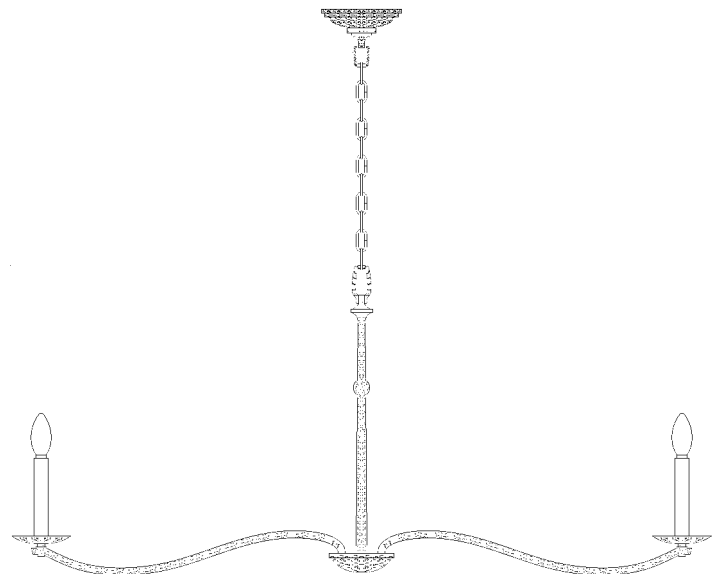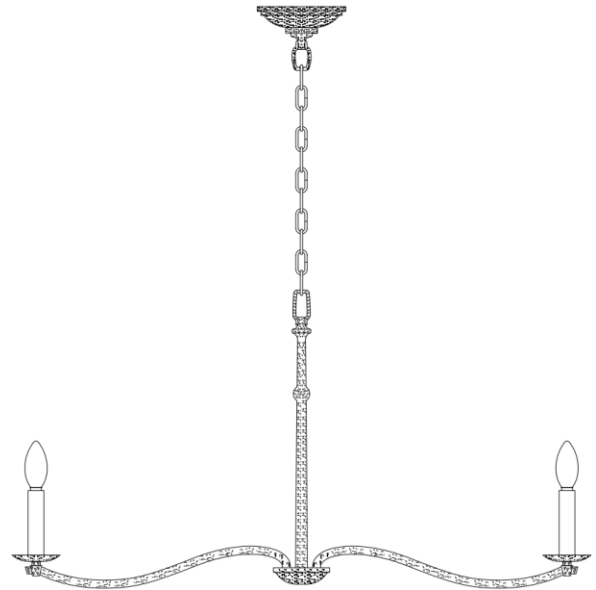

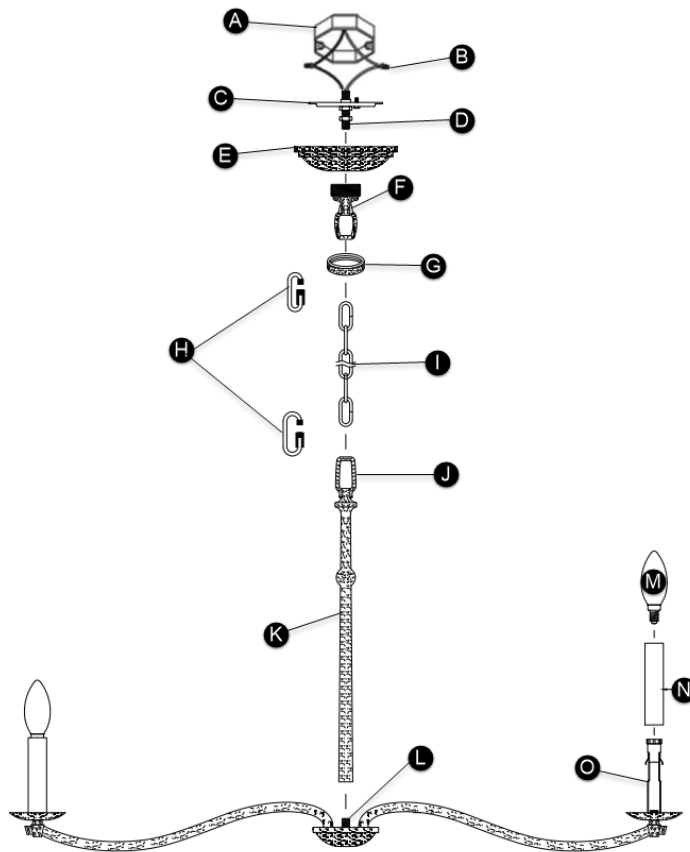

FIXTURE PARTS

- A. Junction box
- B. Wire Nut Connections
- C. Mounting Bar
- D. Threaded Nipple
- E. Canopy
- F. Canopy Loop
- G. Collar Ring
- H. Quick Links
- I. Chain
- J. Fixture Loop
- K. Stem
- L. Fixture Base
- M. Bulb (Not Included)
- N. Tube
- O. Socket

INSTRUCTIONS

I. Preparing the Fixture

1. If necessary, screw the short end of the threaded nipple tightly onto the mounting bar. Secure the canopy loop on the threaded nipple.
2. Secure the mounting bar to the junction box.
3. Spread the arms evenly.
4. Feed the fixture wires through the stem and out from the fixture loop and install the stem on the top of the fixture.
5. Determine the desired overall length and amount of chain needed. Shorten using chain pliers. (Keep extra chain).
6. Attach the chain to the fixture loop using a quick link.
7. Unscrew the collar ring from the canopy loop and let slide down the chain gently, followed by the canopy.
8. Attach the chain to the canopy loop with a quick link.
9. Weave the wires through the chain through the collar ring and canopy.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a. Hot (black, smooth) fixture wire to hot power line wire
 - b. Neutral (white, textured) fixture wire to neutral power line wire
4. Carefully tuck all the wires and wire-nut connections into the junction box.

III. Installing the Fixture

1. Slide the canopy over the mounting bar and secure it in place with the collar ring.
2. Place tubes over sockets.
3. Install light bulbs into the sockets. Refer to the label on the socket for max wattage information.