Visual Comfort & Co.

STUDIO COLLECTION


GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information..

This instruction shows a typical installation.

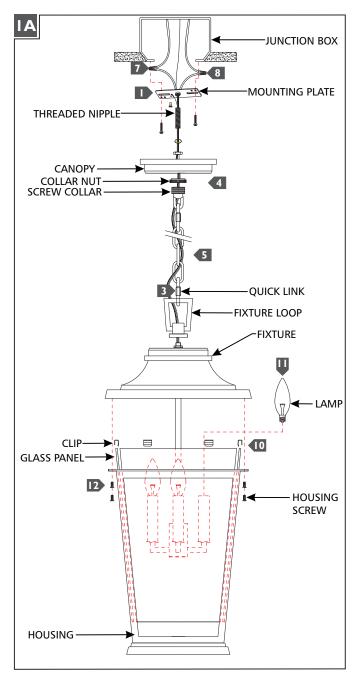

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

- Secure the mounting plate to the junction box.
- Temporarily unscrew and remove the collar nut, then screw the screw collar tightly onto the threaded nipple.
- Install a quick link onto the end of the chain and fixture loop. Determine the wanted height of the fixture and remove a portion of the chain by opening a link and removing it from the top.
- Install the collar nut and canopy onto the chain (in that order), then install the other quick link onto the free end of the chain and screw collar.
- Weave the cord through the chain, screw collar, canopy, threaded nipple, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- Connect the fixture to a suitable ground in accordance to local electrical codes.
- Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- Neatly place all the wires into the junction box, place the canopy onto the ceiling, and secure it in place by screwing the collar nut tightly onto the screw collar.
- Install all glass panels by carefully sliding them into the housing and securing them using the clips.
- Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.
- Install the housing to the fixture and secure them together by screwing on the housing screws.

SAVETHESE INSTRUCTIONS!