ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:


ITEM NO.: DWC61 NAME: JULIE SCONCE

MATERIAL TYPE: METAL FINISH:ENGLISH BRONZE

SOCKET TYPE:E12 SOCKET QTY: 2

BULB WATTAGE: 40W or /CFL 9W or /LED 4W

VOLTAGE:110V-120V ITEM NET WEIGHT: 3.76LBS

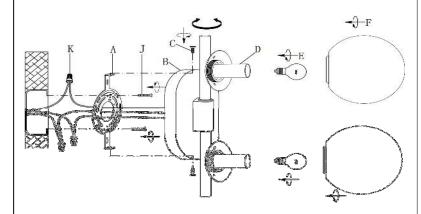

PARTS INCLUDED:			
Mounting Plate (/ Qty: 1 Pc	Socket	(D) Qty: 2 Pcs	
Back Plate (B. Qty: 1 Pc	Glass Globe	(F) Qty: 2 Pcs	
Canopy Screw (C) Qty: 2 Pcs			

HARDWARE INCLUDED:

Mounting Screws Qty: 2 Pcs Plastic Wire Cap (Qty: 3 Pcs

TOOLS NEEDED (Not Included):

1 Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

CARE INSTRUCTIONS:

ARTERIORS

For customer service questions call 1-800-338-2150



TO ASSEMBLE:

- 1. Shut off the main electrical supply from the main fuse box/circuit breaker.
- 2. Attach mounting plate(A) to wall or junction box using mounting screws (J).
- 3. Connect ground wire from wall to ground wire from lamp using the wire caps (K).
- 4. Attach house wire to lamp wires as shown. Fasten the pairs together with a wire caps(K) . DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
- 5. Attach back plate (B) to mounting plate (A) by inserting canopy screws (C) through predrilled holes. Then tighten by using screwdriver.
- 6. Insert 2 TYPE-G 40W or/CFL 9W or /LED 4W bulb (not included) into socket assembly (D). DO NOT EXCEED SPECIFIED WATTAGE OF SCONCE.
- 7. Put and assemble the glass globe (F) by rotating in a clockwise direction.
- Restore power to junction box and test fixture.

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.