LP335838

Linear Pendant

A WARNINGS AND CAUTIONS

Make sure POWER is COMPLETELY OFF at the fuse box

· Have your fixture installed by a qualified licensed electrician

- Prepare everything in a clear area
- Wear gloves at all times during this installation
- · Read instructions carefully before you start assembly
- Keep this installation sheet for future reference

NOTICE

- The important safeguards and instructions outlined in this sheet cannot cover all possible conditions and situations that may occur. It must be understood that caution and certain care factors must be followed. These instructions are provided for your safety and we highly recommend that a licensed, trained electrician install this unit.
- This fixture is designed to be mounted on a correctly installed standard round or octagon box OR through a wiring box with a plaster frame. The box must be securely mounted to the structure of the building. The crossbar and hardware supplied should be used, directly mounting the fixture to the outlet box may make it impossible to correctly align the fixture.

ASSEMBLY INSTRUCTIONS

Step 1

Remove fixture from its original package.

Step 2

Separate mounting plate (1c) from canopy (2a) by loosening the two canopy pivots (2b).

Step 3

Attach mounting plate (1c) to electrical junction box (1a) using junction box screws provided (1e) in hardware package. Secure canopy pivots (2b) to canopy (2a) and secure with mounting collar nut (2c).

Important: This fixture must be mounted independently from junction box, additional means of support is required.

Step 4

Determine hanging height of fixture by securing rods (2d) to canopy pivots (2b) and fixture body after feeding fixture wires through rods.

Step 5

Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts (1b) provided in hardware package.

Step 6


Secure canopy (2a) to mounting plate (1c) by attaching canopy pivot (2b) to hickey (4b).

Step 7

Install the recommended lamp (3b) (not provided) (referred on the socket label for maximum wattage and type) to fixture socket (3c), followed by shade (3a).

You are now ready to enjoy your fixture.



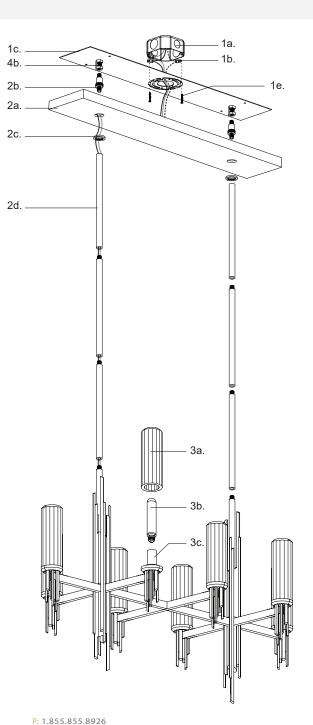

P: 1.855.855.8926 CANADA: 19054 28th Avenue Surrey - BC V3Z 6M3 USA: 3035 E. Lone Mountain Rd - Las Vegas, NV, 89081 www.aloralighting.com 20220615

Please Note:

• 120V input