

ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:


ITEM NO.: DFC12 NAME: CAMELLA Flushmount

MATERIAL TYPE: Steel/Polyresin. FINISH: AB/ Ricestone

SOCKET TYPE: E12 SOCKET QTY: 3

BULB WATTAGE: TYPE B 40W or /9W LED

VOLTAGE: 110-120V ITEM NET WEIGHT: 60.5LBS

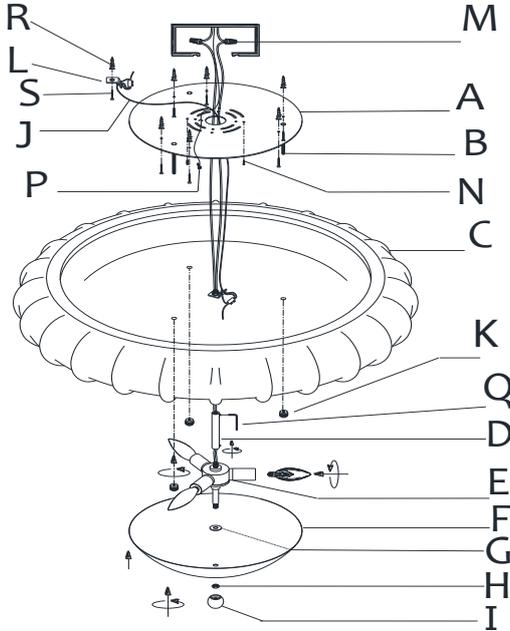

PARTS INCLUDED:

Mounting Plate(A):	Qty: 1PC
Pre-mounted Screw(B):	Qty: 3PCS
Canopy(C)	Qty: 1PC
ROD (D):	Qty: 1PC
Socket Assembly(E):	Qty: 1PC
Shade (F):	Qty: 1PC
Finial (I):	Qty: 1PC
Steel Cable (J):	Qty: 1PC

HARDWARE INCLUDED:


Metal Washer(G)	1	Mounting Bead(K)	3
Hex Nut(H)		Clip (L)	8
Mounting Screws(N)	2	Allen Wrench(Q)	1
Plastic Wire Connector(M)	3	Anchor(R)	8
Green Ground Screw(P)	1	Strengthened Screw (S)	8

TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

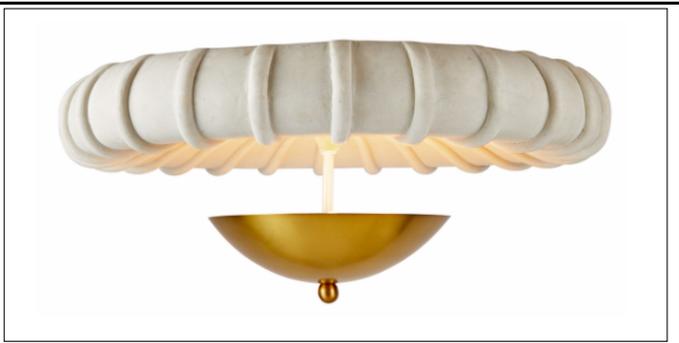

TO ASSEMBLE:

1. Shut off the main electrical supply from the main fuse box/circuit breaker.
2. Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
3. Gently pull wiring down from ceiling junction box and allow to hang.
4. Screw the Rod (D) on the bottom Canopy (C) till tight. Tighten the hexagonal screw in the desired hole by allen Wrench(P).
5. Screw the Socket Assembly(E) to the Rod till tight.
6. Attach the Washer(G) and Shade(E) to the bottom threading end of pipe, then screw Hex Nut(H) and tighten the Finial(I) till tight.
7. Carefully inspect the pendant's fixture wires and pass wires through Mounting Plate(A).
Neutral fixture wire: White,
Hot fixture wire: Black,
Ground wire: Green
8. Wrap ground wire of lamp assembly and ground wire of junction box together and fasten together with a wire connector(M) and wrap the connection with electrical tape.
9. Attach the neutral fixture wire from the pendant to the neutral junction box wire (usually white). Fasten each together with a wire connector(M) and wrap the connection with electrical tape.
10. Attach the hot fixture wire from the pendant to the hot junction box wire (usually black). Fasten each together with a wire connector(M) and wrap the connection with electrical tape.
DO NOT REVERSE THE HOT AND NEUTRAL. CONNECTIONS OR SAFETY WILL BE COMPROMISED.
11. Fix the clip (L) in the position independently of ceiling Junction box by using Anchor(R) and Strengthened screw(S). Then connect the Steel Cable(J) to the Clip.
12. Gently tuck the wire connections neatly into the junction box.
13. Align holes in Mounting plate with holes in junction box and attach with two mounting Screws(N). Secure screws with a Phillips head screwdriver.
14. Drill 7pcs Anchors(R) into the ceiling to fix the mounting plate, then screw 7pcs Strengthened Screws(S) into the anchor till tight.
15. Push Canopy(B) up over the mounting plate until it is flush with the ceiling. Be sure 3pcs Pre-mounted Screws(B) facing down and pass through the holes on the canopy.
16. Use 3pcs Mounting Beads(K) to screw on the Pre-mounted Screws(B) till tight. Be sure hold the Canopy horizontally and safe enough.
17. Insert 3pcs TYPE B 40W bulbs (or suitable LED 9W bulbs, NOT INCLUDED) in the sockets.
DO NOT EXCEED SPECIFIED WATTAGE .
18. Restore power to junction box and test fixture.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIO RS