





## KATAN 17, 24, & 30 PICTURE LIGHTS

SLOCH778; SLOCH779; SLOCH780

### General Product Information



### Tools Required/Suggested



### Safety Information

#### CAUTION-RISK OF FIRE




This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

USE MINIMUM 90°C SUPPLY CONDUCTORS.




Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

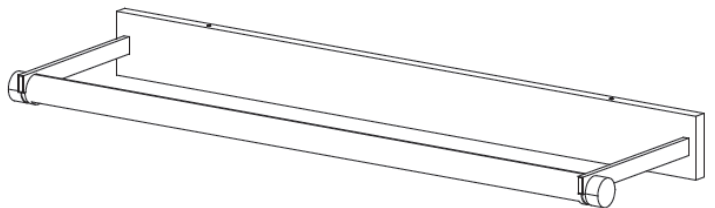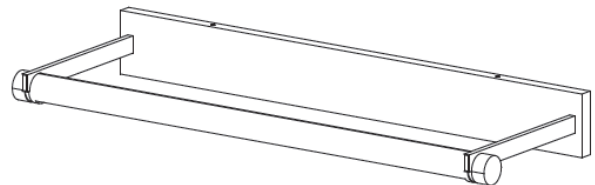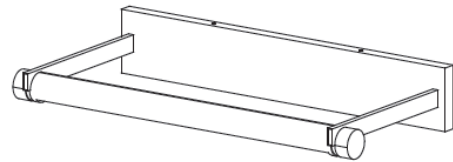



## FIXTURE PARTS

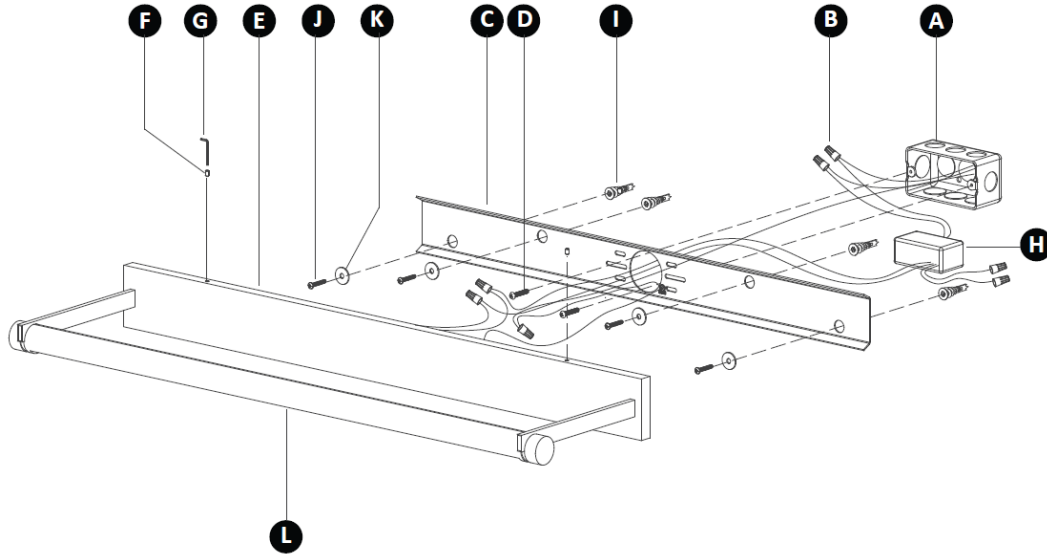

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Plate
- D. Mounting Screws
- E. Fixture
- F. Set Screws
- G. Allen Wrench
- H. Driver
- I. Anchors
- J. Anchor Screws
- K. Washers
- L. Fixture Shade

## INSTRUCTIONS

### I. Preparing the Fixture

1. Unbox and inspect all items included in the fixture's packaging. Gently place all parts on a clean, soft surface.
2. Use the Allen wrench to unscrew the set screws on both sides of the fixture, then remove the mounting plate from the fixture's backplate.
3. Align the mounting plate with the junction box and mark the anchor positions. Drill holes at the marked locations using a bit slightly smaller than the anchors, then screw the anchors into place with a screwdriver.

### II. Wiring & Installing the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there is no electricity running through the wiring.
2. Connect the LED driver input wires to the local power line wires.
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a. Hot driver wire (black) and hot power line wire (usually black) from the junction box (hot to hot)
  - b. Neutral driver wire (white) and neutral power line wire (usually white) from the junction box (neutral to neutral)
4. For 0-10V dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires if not in use.
5. Place the driver in the junction box, ensuring the output driver wires are accessible.
6. Attach the mounting plate to the junction box using the mounting screws. Slide the washers onto the anchor screws and drive them into the anchors to securely fasten the mounting plate to the wall.
7. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to a suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around, or a house wire (green or bare copper wire without insulation).
8. Then connect the following pairs of wires:
  - a. Negative (-/blue) fixture wire to the negative (-) output driver wire
  - b. Positive (+/red) fixture wire to the positive (+) output driver wire
9. Secure the fixture to the mounting plate and secure it in place with the set screws using the Allen wrench.
10. Adjust the fixture shade to the preferred angle to complete installation.