








RITO SMALL, MEDIUM & LARGE BATH FIXTURES

GLV1123; GLV1121; GLV1122




General Product Information



INDOOR



BULB(S)
(NOT INCLUDED)



BEST PRACTICE:
HANDLE FIXTURE
WITH GLOVES



FCC Statement



Product Warranty

Suggested/Required Tools



ELECTRIC DRILL



PHILLIPS-HEAD
SCREWDRIVER



WIRE CUTTER




PENCIL/MARKER

Safety Information

CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

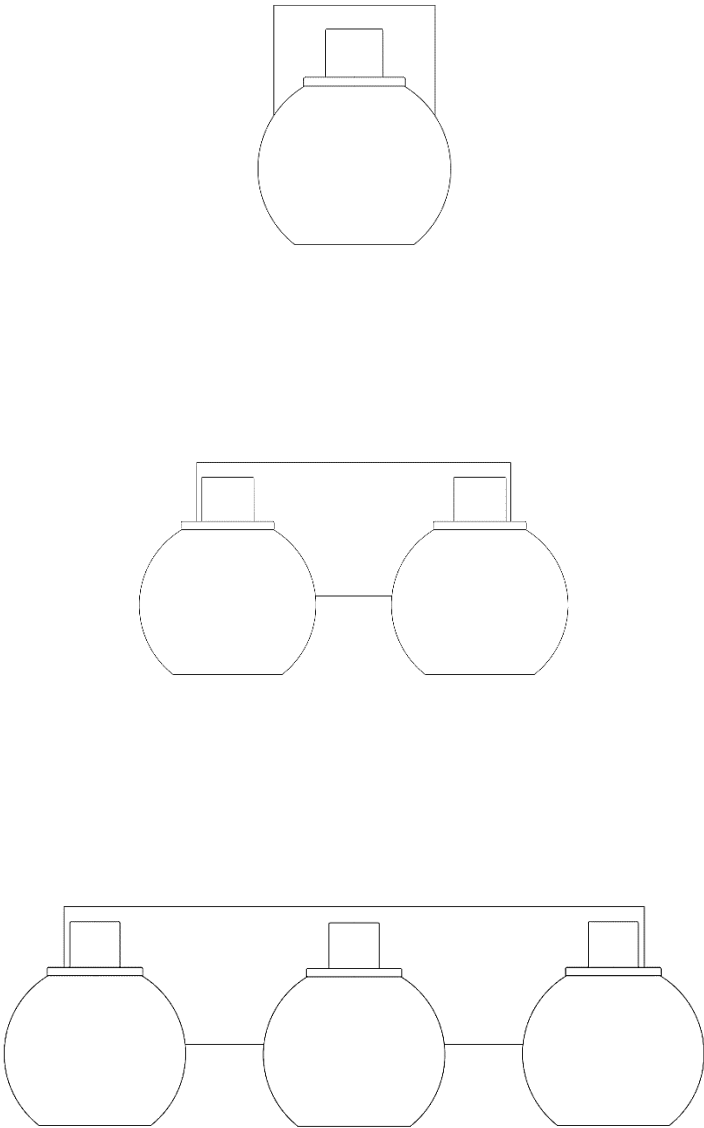

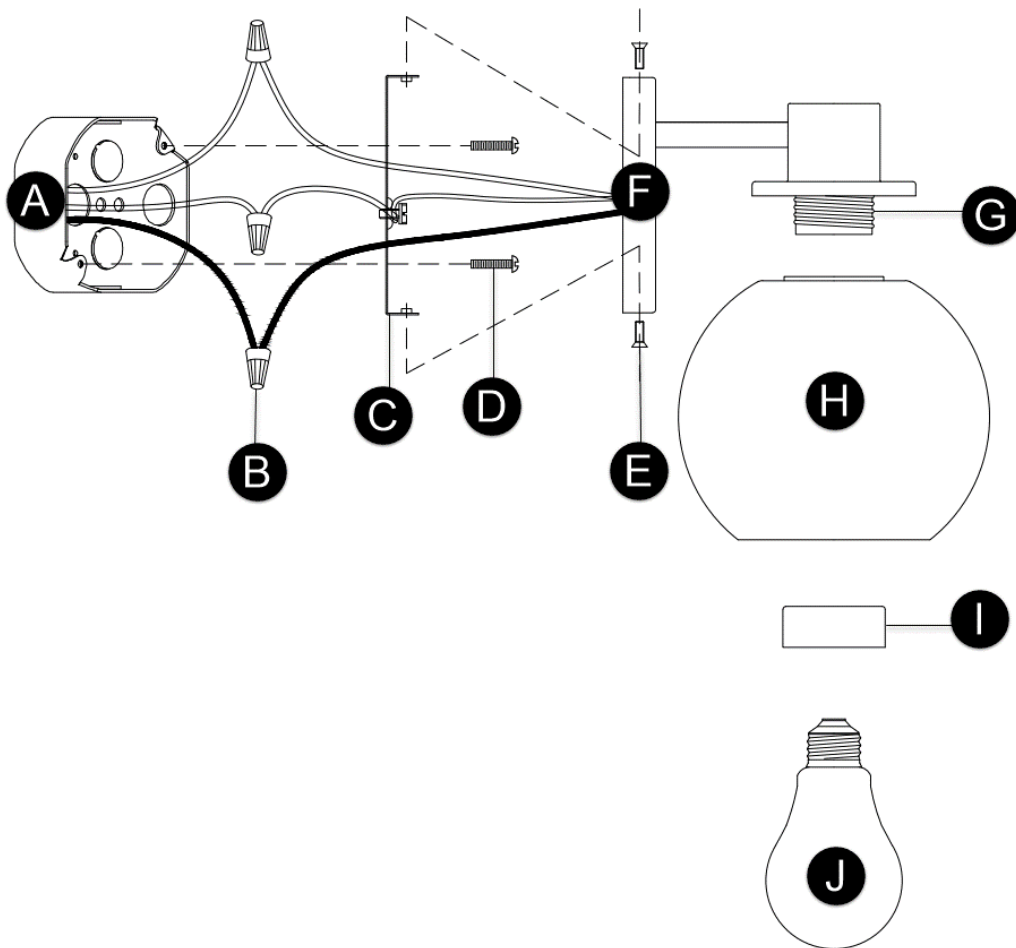

FIXTURE PARTS

- A. Junction box
- B. Wire Nut
- C. Mounting Plate
- D. Mounting Screws
- E. Fixture Screws
- F. Fixture Base/Backplate
- G. Socket(s)
- H. Fixture Shade(s)
- I. Shade Collar(s)
- J. Bulb(s) (Not Included)

INSTRUCTIONS

I. Preparing for Installation

1. Separate the mounting plate from the fixture backplate and secure it to the junction box with the mounting screws.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Neutral (white) fixture wire to neutral power line
 - b) Hot (black) fixture wire to hot power line wire
4. Carefully tuck all the wires behind the mounting plate into the junction box.

III. Installing the Fixture

1. Mount the fixture onto the mounting plate and secure it in place using the fixture screws.
2. Place the shade(s) over the socket(s) and secure them with the shade collar(s).
3. Screw the bulbs into the sockets. Refer to the socket label for max wattage information.