

Litgh bulb

1x F-26

1x E-26

1x E-26

1x F-26

1x F-26

1x F-26

1x F-26

1x E-26

1x F-26

1x E-26

1x E-26

1x F-26

1x E-26

1x F-26

1x E-26

1x E-26

1x E-26

1x E-26

1x F-26

1x E-26

1x F-26

1x E-26

1x F-26

1x F-26

1x F-26

1x E-26

1x F-26

1x E-26

1x E-26 1x E-26

1x E-26

1x F-26

1x E-26

1x E-26 1x E-26

1x E-26 1x E-26

1x E-26

1x E-26 1x E-26

1x E-26 1x E-26

1x E-26

1x F-26

1x F-26

1x E-26

1x E-26

E-26

E10

## ASSEMBLY INSTRUCTIONS

USA & CANADA

## WARNING!



116

303

304

1140

1141

1100

1151

1153

1180

1181

1182

1183

1217

1233

1236

1239

1240

1242

1243

1244

1250

1276

1280

1283

1299

1310

1309

1363

1426

1427

1479

1480

1473

1474 1475

1477

1478

1/182

1483

1485

1486

1487

1488

1490

1494

1495

1509

1530

1531

1532

Be sure electrical power is OFF before and during installation or maintenance. The luminaire must be installed by a qualified electrician, in accordance with all applicable local codes.

 $(07)_{1}$ 

(08)

Ensure that the rated luminaire voltage requirements are compatible with the available mains supply in which it will be installed.

All LEDS are included in your lamp. Never touch the LED surface with your bear hands as this may reduce the life of your LED.

Do not alter, relocate or remove any electrical component.

Input Voltage: 120V - 240 V Input Frequency: 60 Hz

Material: Natural Wood Veneer and MDF Weight:

Read carefully all the assembling instructions below and turn OFF energy power before starting the installation.

(ii) Remove the protecting package from the pieces taking care to not harm any parts with cutting surfaces or objects. Lay the parts of the fixture on some horizontal surface in order to connect them, if needed use the protecting package to soften the surface and protect the parts from getting scratched or harmed.

### MAKING ELECTRICAL CONNECTIONS

- ② Pass the energy cable through the strain relief (S) fixed in the canopy (C1), through the nipple (N), junction box cover (J) and crossbar (C2).
- Make the electrical connections in accordance with all applicable local codes.

  This product must be installed in accordance with the applicable.

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product, and the hazards involved.

- O4) Screw the crossbar (C2) and junction box cover (J) in the junction box using the provided screws (S1).
- Once the crossbar and junction box cover are fixed in the ceiling, screw the nipple (N) on it and insert the excess enegy cable into the junction box through the strain relief (S).
- Once the nipple is fixed on the junction box, screw the strain relief (S) on the nipple until the canopy is fixed and tight against the ceiling.
- (97) Adjust the height of the pendant and fasten the strain relief screw to lock the energy cable.
- (8) Install an UL Listed E-26 lightbulb (not included) taking care to not exceed the recommended wattage rating of 25W.

Turn on the energy power, your luminaire is ready for use.







PROVIDED SCREWS

(05)

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

ACCORD Lighting guarantees coverage against manufacturing defects including electrical components and finishes, for a period of three years, under normal use, from the date of purchase. For warranty service, please contact your local dealer for further instructions. Proof of date of purchase will be required for validation of warranty service.

The responsability of the manufacturer regarding the product warranty is related to the correct observation of the instructions contained in this manual. The manufacturer is not responsible for any damage to the product caused by accidents, alterations of any kind, improper usage or improper installation.

validation of warranty service. See the website for additional warranty details.

ACCORD Lighting reserves the right to change the dimensions and specifications contained in this manual without prior notice, in accordance with its policy of continuous product improvement. Please, contact the manufacturer if additional information is necessary. The illustrations in this manual are for guidance only and may vary in scale, dimensions and model details.





GU-10

10

# ASSEMBLY INSTRUCTIONS

USA & CANADA

# Æ

### WARNING!

Be sure electrical power is OFF before and during installation or maintenance.

The luminaire must be installed by a qualified electrician, in accordance with all applicable local codes.

Ensure that the rated luminaire voltage requirements are compatible with the available mains supply in which it will be installed.

All LEDS are included in your lamp. Never touch the LED surface with your bear hands as this may reduce the life of your LED.

Do not alter, relocate or remove any electrical component.

Input Voltage: 120V - 240 V Input Frequency: 60 Hz

Material: Natural Wood Veneer and MDF

Read carefully all the assembling instructions below and turn OFF energy power before starting the installation.

(1) Remove the protecting package from the pieces taking care to not harm any parts with cutting surfaces or objects. Lay the parts of the fixture on some horizontal surface in order to connect them, if needed use the protecting package to soften the surface and protect the parts from getting scratched or harmed

#### MAKING ELECTRICAL CONNECTIONS

- Pass the energy cable through the strain relief (S) fixed in the canopy (C1), through the nipple (N), junction box cover (J) and crossbar (C2).
- Make the electrical connections in accordance with all applicable local codes.


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product, and the hazards involved.

- (C2) and junction box cover (J) in the junction box using the provided screws (S1).
- Once the crossbar and junction box cover are fixed in the ceiling, screw the nipple (N) on it and insert the excess enegy cable into the junction box through the strain relief (S).
- Once the nipple is fixed on the junction box, screw the strain relief (S) on the nipple until the canopy is fixed and tight against the ceiling.
- (07) Adjust the height of the pendant and fasten the strain relief screw to lock the energy cable.
- (38) Once the luminaire is suspended and level, install a Max 8W LED GU-10 MR16 bulb into the socket.

Turn on the energy power, your luminaire is ready for use.

PROVIDED SCREWS



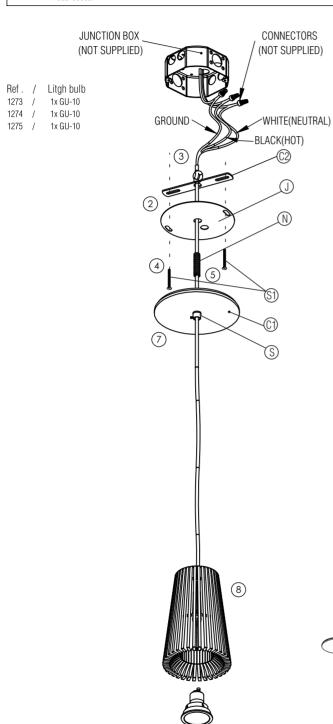

## ATENTION!



FAILURE TO COMPLY WITH THESE INSTRUCTIONS MAY CAUSE ACCIDENTS AND LOSS OF PRODUCT WARRANTY. Its recommended to read these instructions completely and carefully before proceeding.

### SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

ACCORD Lighting guarantees coverage against manufacturing defects including electrical components and finishes, for a period of three years, under normal use, from the date of purchase. For warranty service, please contact your local dealer for further instructions. Proof of date of purchase will be required for validation of warranty service.

The responsability of the manufacturer regarding the product warranty is related to the correct observation of the instructions contained in this manual.

The manufacturer is not responsible for any damage to the product caused by accidents, alterations of any kind, improper usage or improper installation.

See the website for additional warranty details.

ACCORD Lighting reserves the right to change the dimensions and specifications contained in this manual without prior notice, in accordance with its policy of continuous product improvement. Please, contact the manufacturer if additional information is necessary. The illustrations in this manual are for guidance only and may vary in scale, dimensions and model details.