

Litgh bulb

1x F-26

1x E-26

1x E-26

1x F-26 1x F-26

1x F-26

1x F-26

1x E-26

1x F-26

1x F-26

1x E-26

1x F-26

1x F-26

1x F-26

1x E-26

1x F-26

1x E-26 1x E-26

1x E-26

1x F-26

1x E-26

1x E-26

1x F-26 1x E-26

1x E-26

1x E-26

1x E-26

1x E-26

1x E-26

1x F-26

1x F-26

1x F-26

1x E-26

1x E-26

1x F-26

1x F-26 1x E-26

1x F-26

1x E-26 1x E-26 1x E-26

1x E-26

1x E-26

1x E-26 1x E-26

1x E-26

1x E-26

E-26

E10

ASSEMBLY INSTRUCTIONS

USA & CANADA

WARNING!



116

303

304

1140

1181

1182

1183

1231

1236

1239

1240

1241

1243

1244

1250

1276 1277

1280

1283

1310

1036

1309

1287

1426

1427

1480

1473

1474

1476 1477

1478

1482

1483

1484

1486

1487

1488

1493

1/10/

1495

1496

1509 1530

1531

Be sure electrical power is OFF before and during installation or maintenance. The luminaire must be installed by a qualified electrician, in accordance with all applicable

 $(07)_{1}$

(08)

Ensure that the rated luminaire voltage requirements are compatible with the available mains supply in which it will be installed.

All LEDS are included in your lamp. Never touch the LED surface with your bear hands as this may reduce the life of your LED.

Do not alter, relocate or remove any electrical component.

Input Voltage: 120V - 240 V Input Frequency: 60 Hz

Material: Natural Wood Veneer and MDF

Read carefully all the assembling instructions below and turn OFF energy power before starting the installation.

(01) Remove the protecting package from the pieces taking care to not harm any parts with cutting surfaces or objects. Lay the parts of the fixture on some horizontal surface in order to connect them, if needed use the protecting package to soften the surface and protect the parts from getting scratched or

MAKING ELECTRICAL CONNECTIONS

- (O2) Pass the energy cable through the strain relief (S) fixed in the and crossbar (C2).
- (03) Make the electrical connections in accordance with all applicable local codes.

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product, and the hazards involved.

- (O4) Screw the crossbar (C2) and junction box cover (J) in the
- (05) Once the crossbar and junction box cover are fixed in the ceiling, screw the nipple (N) on it and insert the excess enegy cable into the junction box through the strain relief (S).
- Ob Once the nipple is fixed on the junction box, screw the strain relief (S) on the nipple until the canopy is fixed and tight
- (07) Adjust the height of the pendant and fasten the strain relief
- (08) Install an UL Listed E-26 lightbulb (not included) taking care

Turn on the energy power, your luminaire is ready for use.



FAILURE TO COMPLY WITH THESE INSTRUCTIONS MAY CAUSE ACCIDENTS AND LOSS OF PRODUCT WARRANTY. Its recommended to read these instructions completely and carefully



PROVIDED SCREWS


(05)


SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.


ACCORD Lighting guarantees coverage against manufacturing defects including electrical components and finishes, for a period of three years, under normal use, from the date of purchase. For warranty service, please contact your local dealer for further instructions. Proof of date of purchase will be required for validation of warranty service.


The responsability of the manufacturer regarding the product warranty is related to the correct observation of the instructions contained in this manual The manufacturer is not responsible for any damage to the product caused by accidents, alterations of any kind, improper usage or improper installation.


ACCORD Lighting reserves the right to change the dimensions and specifications contained in this manual without prior notice, in accordance with its policy of continuous product improvement. Please, contact the manufacturer if additional information is necessary. The illustrations in this manual are for guidance only and may vary in scale, dimensions and model details.


















See the website for additional warranty details.







GU-10

10

ASSEMBLY INSTRUCTIONS

USA & CANADA

Æ

WARNING!

Be sure electrical power is OFF before and during installation or maintenance. The luminaire must be installed by a qualified electrician, in accordance with all applicable local codes.

Ensure that the rated luminaire voltage requirements are compatible with the available mains supply in which it will be installed.

All LEDS are included in your lamp. Never touch the LED surface with your bear hands as this may reduce the life of your LED.

Do not alter, relocate or remove any electrical component.

Input Voltage: 120V - 240 V Input Frequency: 60 Hz

Material: Natural Wood Veneer and MDF

Read carefully all the assembling instructions below and turn OFF energy power before starting the installation.

(1) Remove the protecting package from the pieces taking care to not harm any parts with cutting surfaces or objects. Lay the parts of the fixture on some horizontal surface in order to connect them, if needed use the protecting package to soften the surface and protect the parts from getting scratched or harmed

MAKING ELECTRICAL CONNECTIONS

- Pass the energy cable through the strain relief (S) fixed in the canopy (C1), through the nipple (N), junction box cover (J) and crossbar (C2).
- Make the electrical connections in accordance with all applicable local codes.


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product, and the hazards involved.

- (C2) and junction box cover (J) in the junction box using the provided screws (S1).
- Once the crossbar and junction box cover are fixed in the ceiling, screw the nipple (N) on it and insert the excess enegy cable into the junction box through the strain relief (S).
- Once the nipple is fixed on the junction box, screw the strain relief (S) on the nipple until the canopy is fixed and tight against the ceiling.
- (07) Adjust the height of the pendant and fasten the strain relief screw to lock the energy cable.
- (38) Once the luminaire is suspended and level, install a Max 8W LED GU-10 MR16 bulb into the socket.

Turn on the energy power, your luminaire is ready for use.

PROVIDED SCREWS



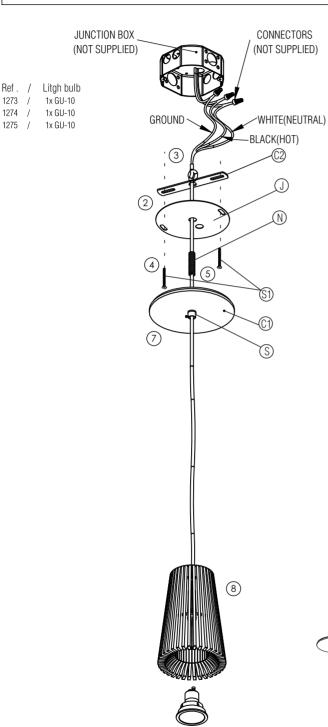

ATENTION!



FAILURE TO COMPLY WITH THESE INSTRUCTIONS MAY CAUSE ACCIDENTS AND LOSS OF PRODUCT WARRANTY. Its recommended to read these instructions completely and carefully before proceeding.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

ACCORD Lighting guarantees coverage against manufacturing defects including electrical components and finishes, for a period of three years, under normal use, from the date of purchase. For warranty service, please contact your local dealer for further instructions. Proof of date of purchase will be required for validation of warranty service.

The responsability of the manufacturer regarding the product warranty is related to the correct observation of the instructions contained in this manual.

The manufacturer is not responsible for any damage to the product caused by accidents, alterations of any kind, improper usage or improper installation.

See the website for additional warranty details.

ACCORD Lighting reserves the right to change the dimensions and specifications contained in this manual without prior notice, in accordance with its policy of continuous product improvement. Please, contact the manufacturer if additional information is necessary. The illustrations in this manual are for guidance only and may vary in scale, dimensions and model details.