
hollis+morris



constellation SCONCE product installation + specifications

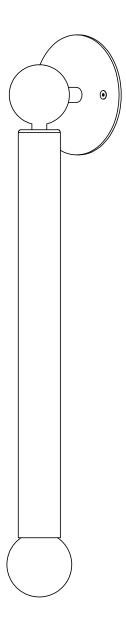

constellation sconce

PRODUCT CODE CONSconce

MATERIALS

- + Solid wood
- + Hand blown glass
- + Metal
- + G9 LED light bulb

FINISH

+ Hard wax oil

INPUT


+ 120V 50/60 Hz (Canada + US)

OUTPUT

- + 4.5W
- + 450 lumens
- + 3000K with CRI of 85 or higher

MOUNTING

+ J-box connection



certification:





hardware components list


Component	Quantity	
Constellation Sconce	1	
8-32, 1" Flat Head Screw	2	

dimensions + installation

- 1. Locate desired mounting location on wall.
- 2. Have a certified electrician connect +/- leads into 120 V domestic power.
- 3. Attach fixture to junction box with provided 8-32 screws.

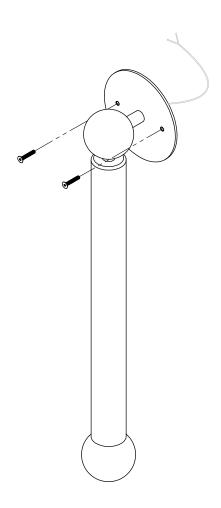




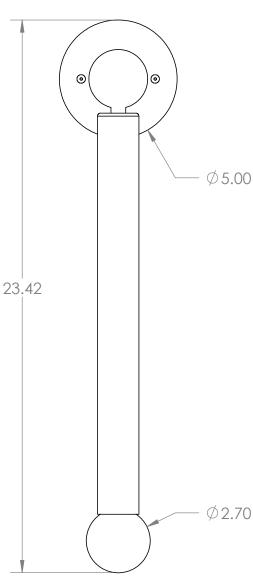

hardware replacement





- 1. Unscrew glass bulb from wood top
- 2. Remove G9 LED bulb from socket by gently pulling
- 3. Insert a new G9 LED bulb
- 4. Screw glass bulb onto wood top