

Willow wall light

product installation + specifications

product code:

WILLOWall

materials:

- + Solid W.Oak or Walnut
- + Frosted glass
- + Metal

finish:

- + Hardwax oil

input:

- + 120 V 50/60 Hz (Canada + US)

output:




- + 8 W
- + 480 lumens
- + 3000K with CRI of 95 or higher

driver:






- + 120 V - 12 V fully dimmable
- + 0-10V (120 V - 277 VAC - 12 VDC)
- + driver included

wall mounting:




- + cord length: 5' standard (custom length available)
- + single wire driver connection

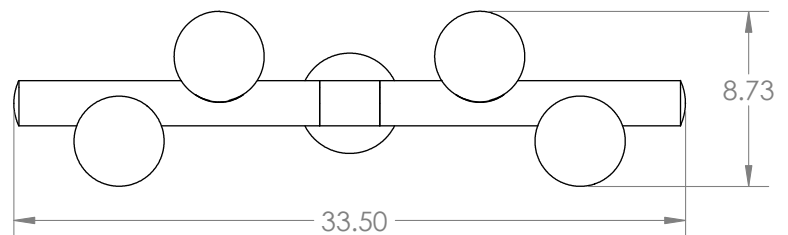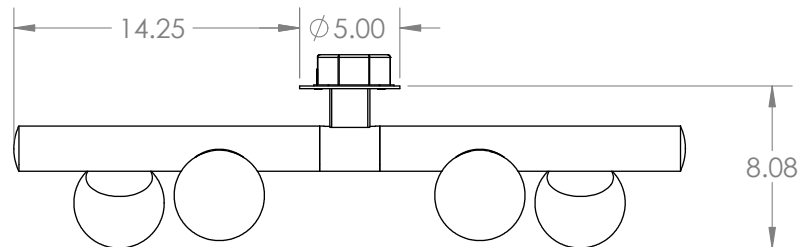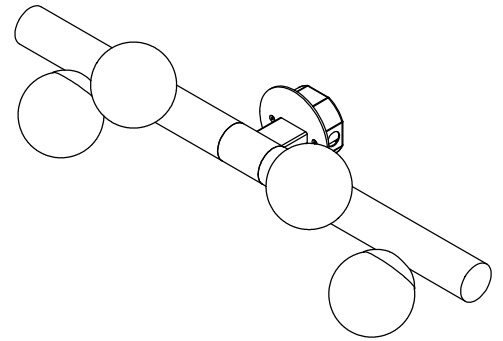


hardware component list

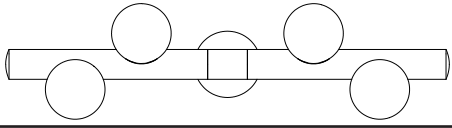Component	Quantity	
Constellation Wall	1	
8-32, 1" Flat Head Screw	2	
Universal Junction Plate	1	
B+L Driver	1	
8-32, 1" Round Head Screw	2	

hardware installation assembly

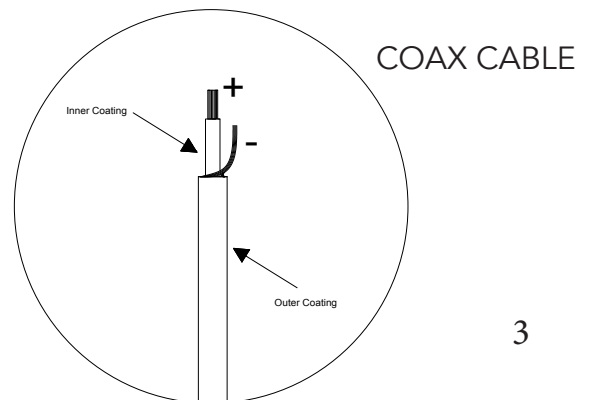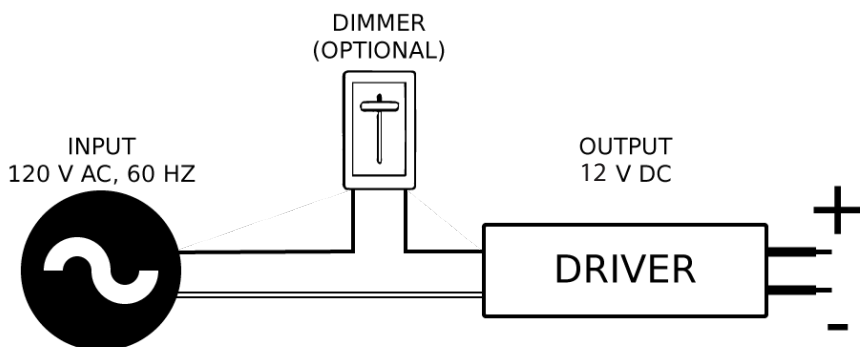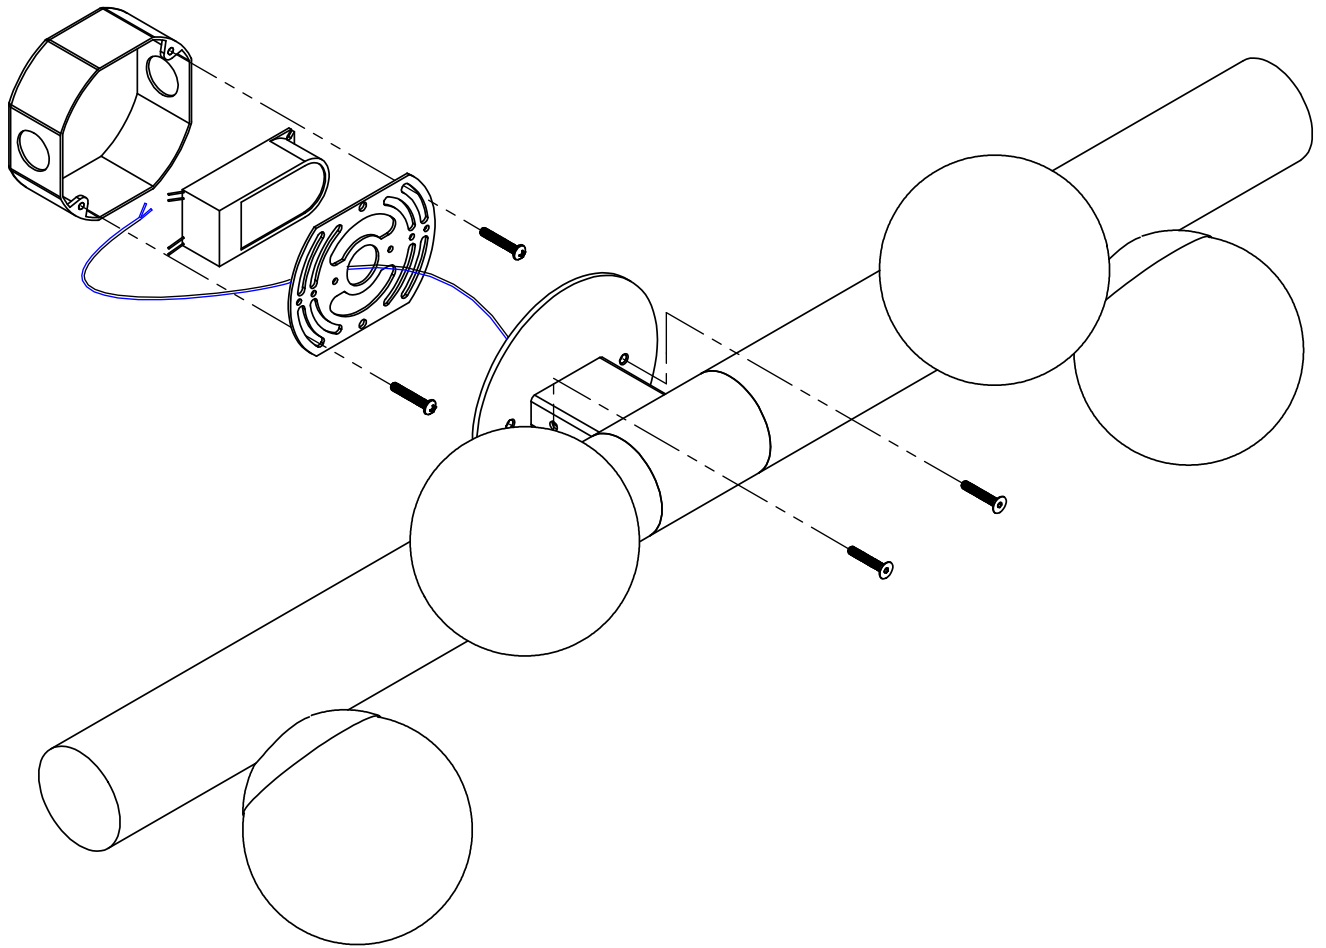

hardware installation

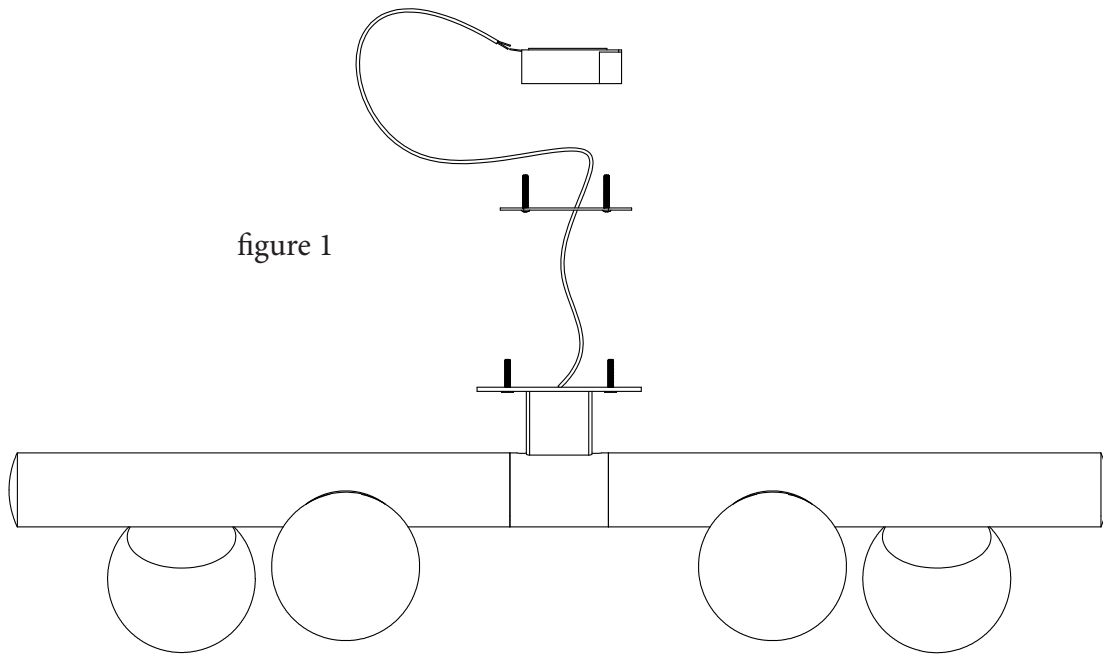

1. Connect the driver to the junction box using the adhesive tape applied to the back of the driver.
2. Place the fixture on the wall as intended and mark the fixture mounting point.
3. Feed the coax power cable through the universal junction plate so that it can be wired to the driver as shown in figure 1. Then have a certified electrician connect this driver to 120 V domestic power.
4. With the driver in the junction box, fasten the universal junction plate to the box with the round head 8-32 screws.
5. The fixture can now be mounted to the junction box plate using the flat head 8-32 screws.