


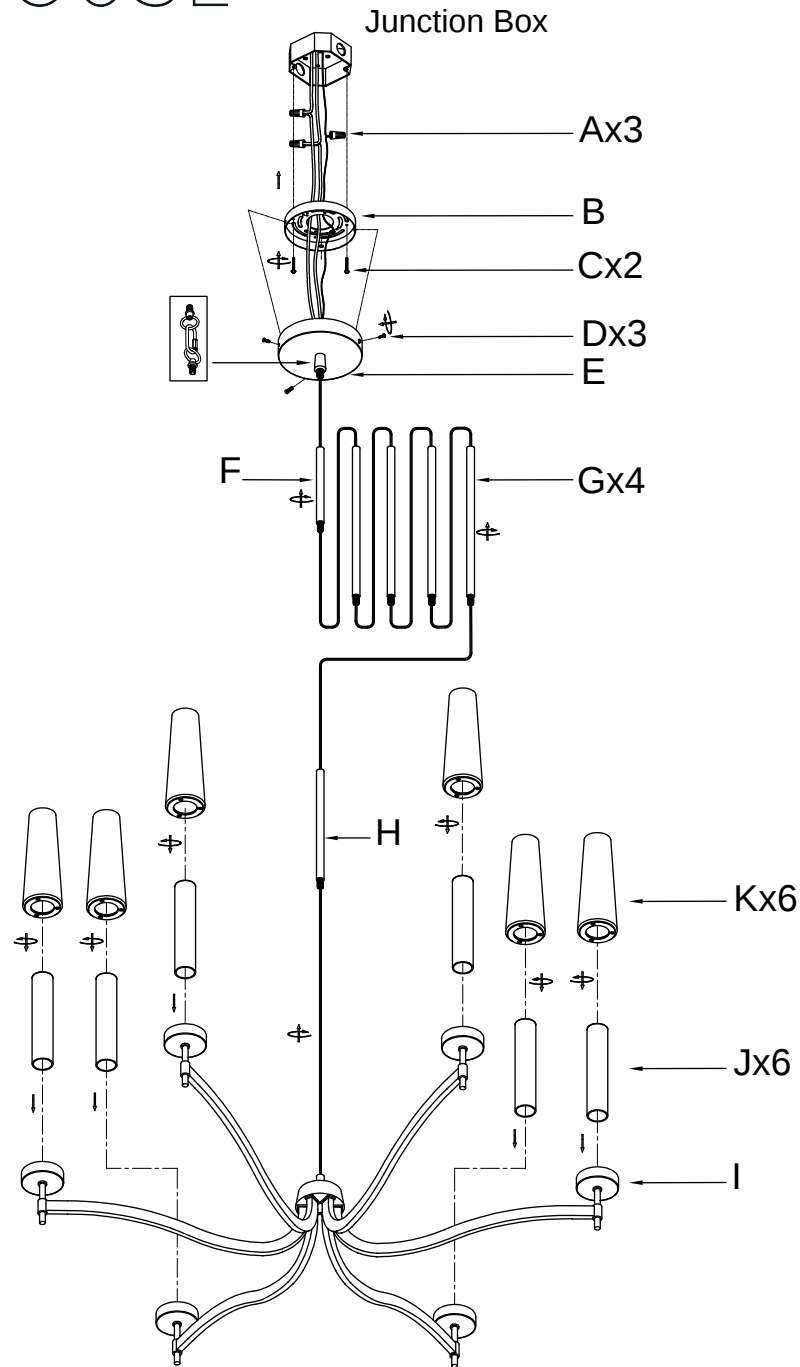

ASSEMBLY INSTRUCTIONS

1. Carefully unpack and identify all parts.
2. Turn the power to the installation point OFF.
3. Assemble the tubes (F, G, H) together. Thread the bottom end into the coupling on the fixture body (I) until snug. Thread the top end into the nipple on the canopy (E).
4. Attach the mounting plate (B) to the junction box, securing with the two screws (C). The side of the mounting plate marked "GND" must face outward.
5. Use the wire connectors (A) to connect fixture wires and supply wires: black to black, white to white, and ground to copper/bare.
6. Place the canopy (E) over the mounting plate (B), securing with the side screws (D).
7. Install the inner glass shades (J) and the outer glass shades (K) onto the sockets.
8. Restore power to the installation point and retain this sheet for future reference.