




MONTERRO 1, 2, 3, & 4 LIGHT VANITIES

VS2370_ ; VS2470_

General Product Information



Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



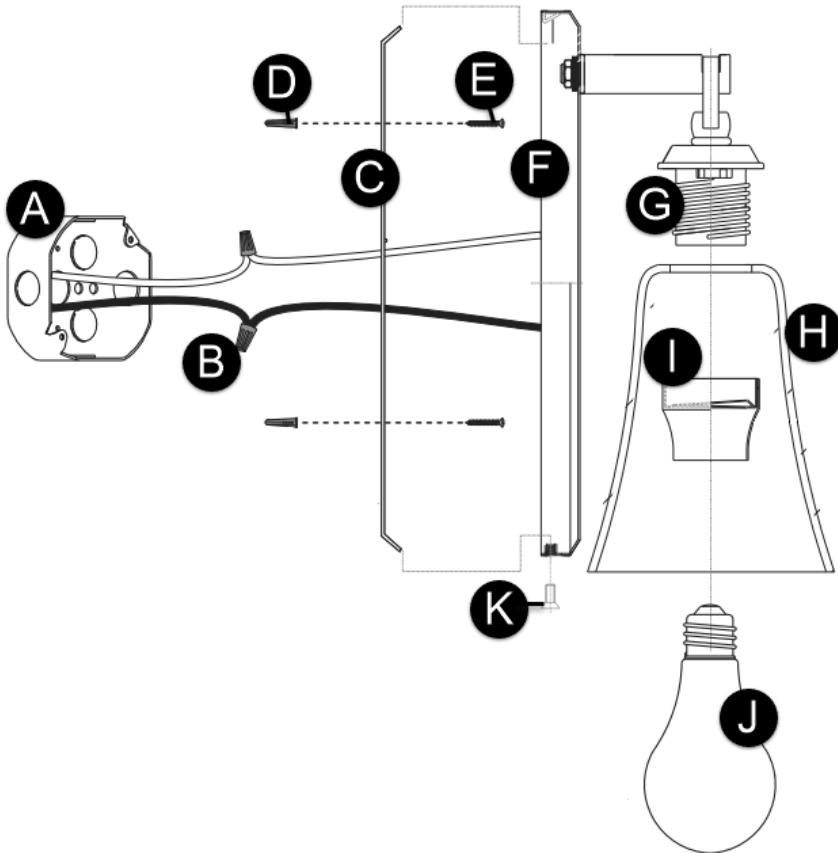

Fixture Parts

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Plate
- D. Anchors
- E. Anchor Screws
- F. Fixture Base
- G. Socket
- H. Shade
- I. Collar Nut
- J. Bulb (Not Included)
- K. Fixture Screw

INSTRUCTIONS

I. Preparing the Fixture

1. **Models VS23701 and VS24701 only:** Temporarily install the mounting plate to the junction box.
2. **Models VS23701 and VS24701 only:** Mark the anchor hole locations on the mounting plate, then remove the mounting plate.
3. **Models VS23701 and VS24701 only:** Drill appropriately sized holes at the marked locations and install the anchors.
4. Secure the mounting plate to the junction box.
5. **Models VS23701 and VS24701 only:** Screw the anchor screws into the anchors.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Hot fixture wire to hot power line wire
 - b) Neutral fixture wire to neutral power line wire
4. Carefully tuck all the wires behind the mounting plate into the junction box.

III. Installing the Fixture

1. Mount the fixture base onto the mounting plate, then swing the fixture base down flush against the wall and secure it with the fixture screw.
2. Place the shade onto the socket and secure it in place by screwing the collar nut onto the socket. **Note: Models VS23701 & VS24701 only: Hold the glass with one hand to prevent it from scratching the back plate and tighten the collar nut with the other hand.**
3. Screw the bulb into the socket. Refer to the socket label for max wattage information.