
ASSEMBLY INSTRUCTIONS

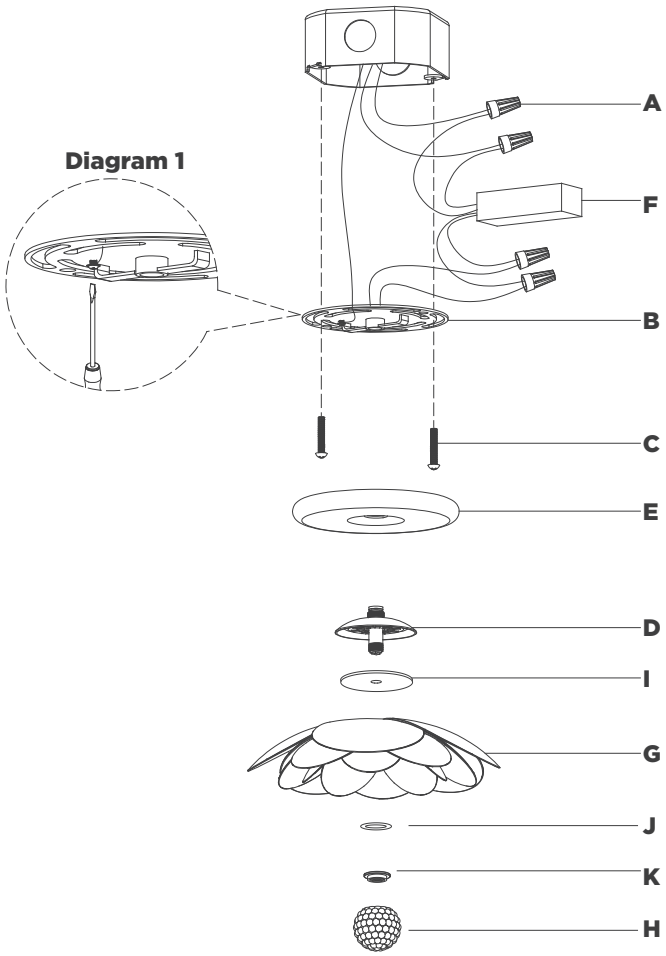

Petaluma 7″ Flush Mount

Item # BBL4300

NOTICE:


This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver Slotted Screwdriver

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Unscrewing finial **(H)** and shade ring **(K)**, then remove rubber washer **(J)**, protective cap **(I)** and light source **(D)** from mounting plate **(B)**.
3. Connect driver **(F)** input neutral wire (white) to the supply neutral wire (usually white) using wire nut **(A)**.
4. Connect driver **(F)** input hot wire (black) to the supply hot wire (usually black) using wire nut **(A)**.
   CAUTION: Do not reverse the hot and neutral connections.
5. Connect supply ground wire (usually green or bare copper) around the green grounding screw (see diagram 1). Tighten.
   NOTE: It is imperative that the fixture is grounded.
6. Connect fixture neutral wire (blue) to driver **(F)** output wire (blue) using wire nut **(A)**.
7. Connect fixture hot wire (red) to driver **(F)** output wire (red) using wire nut **(A)**.
   CAUTION: Do not reverse the hot and neutral connections.
8. Insert driver **(F)** into junction box.
9. Install mounting plate **(B)** to the junction box and secure with mounting screws **(C)**.

ASSEMBLY INSTRUCTIONS

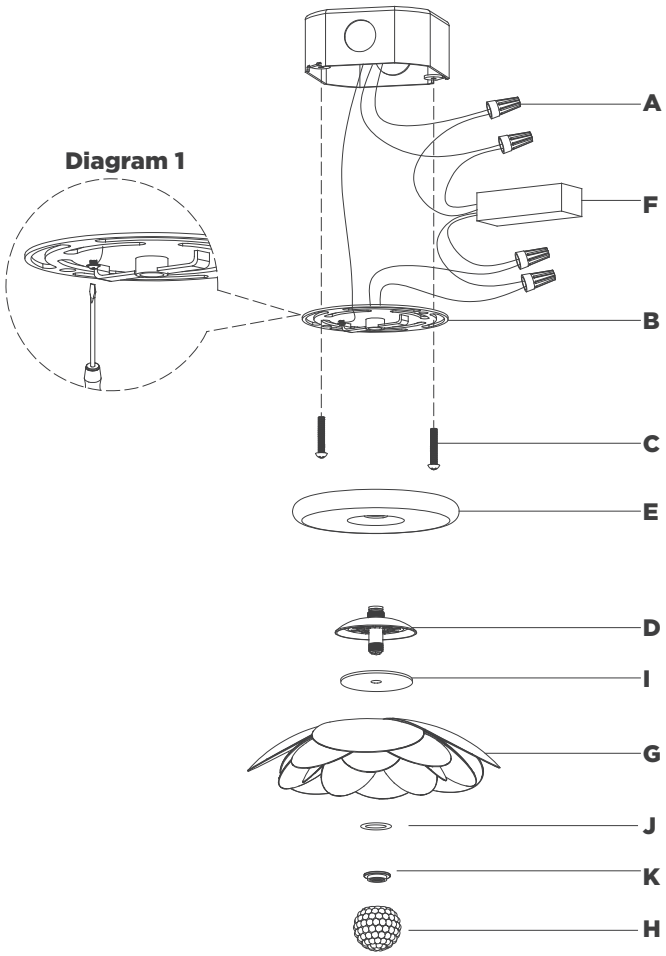

Petaluma 7″ Flush Mount

Item # BBL4300

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

---

10. Remove finial **(H)**, shade ring **(K)**, rubber washer **(J)** and protective cap **(I)** from light source **(D)**, then install canopy **(E)** to mounting plate **(B)** and secure with light source **(D)**.
    NOTE: Discard protective cap **(I)** after assembly.
11. Install shade **(G)** to light source **(D)** and secure with rubber washer **(J)** and shade ring **(K)**, then thread finial **(H)** to shade ring **(K)**.
    NOTE: Do not overtighten otherwise glass shade could be damaged.

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.