

Whitby Pendant

CP1421, CP1431, CP1441 | 1.0

VISUAL COMFORT & Co.

STUDIO COLLECTION

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

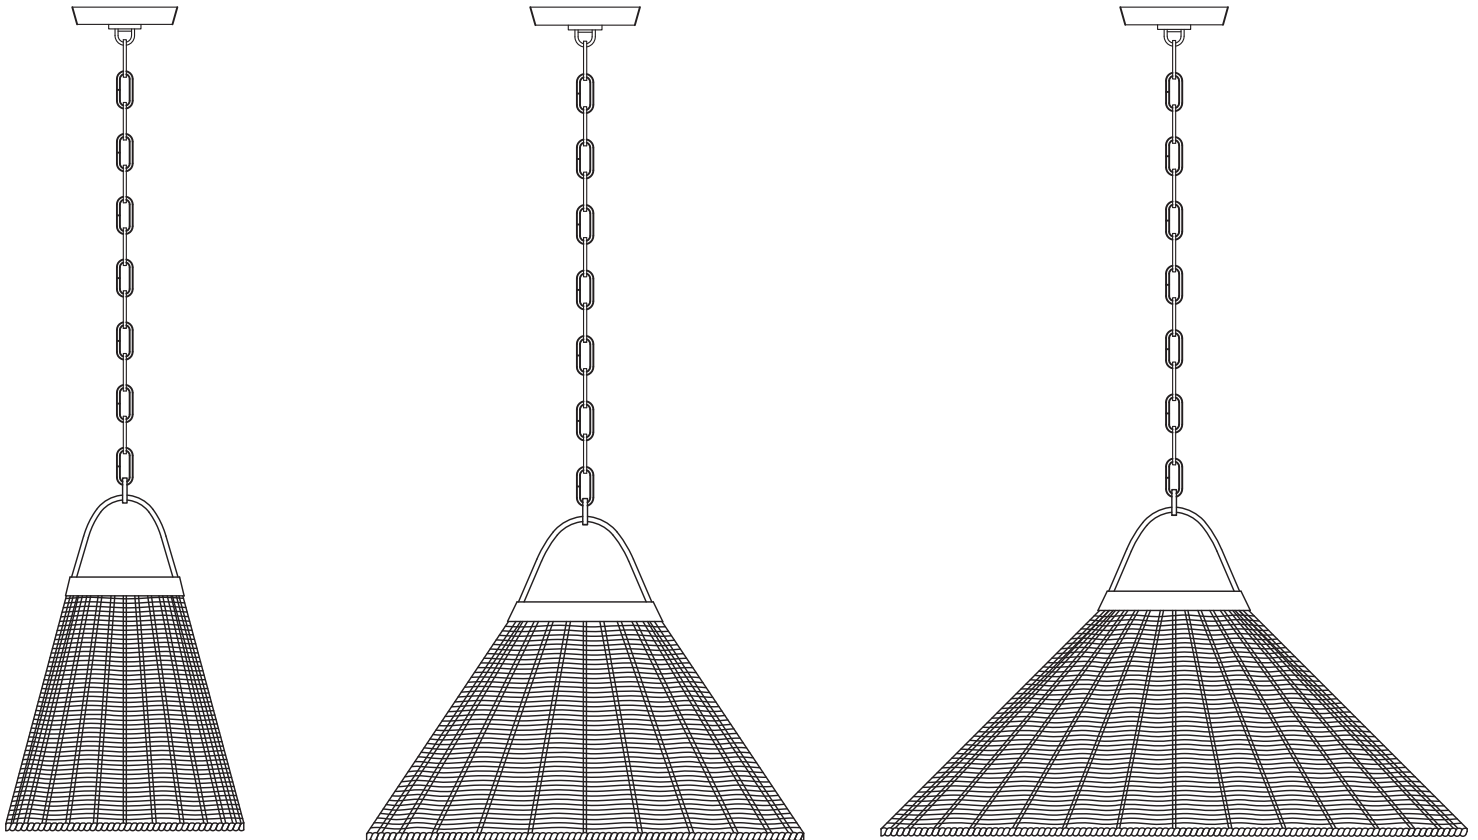


Visual Comfort & Co.

7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F 847.410.4500

www.visualcomfort.com

Install the Fixture

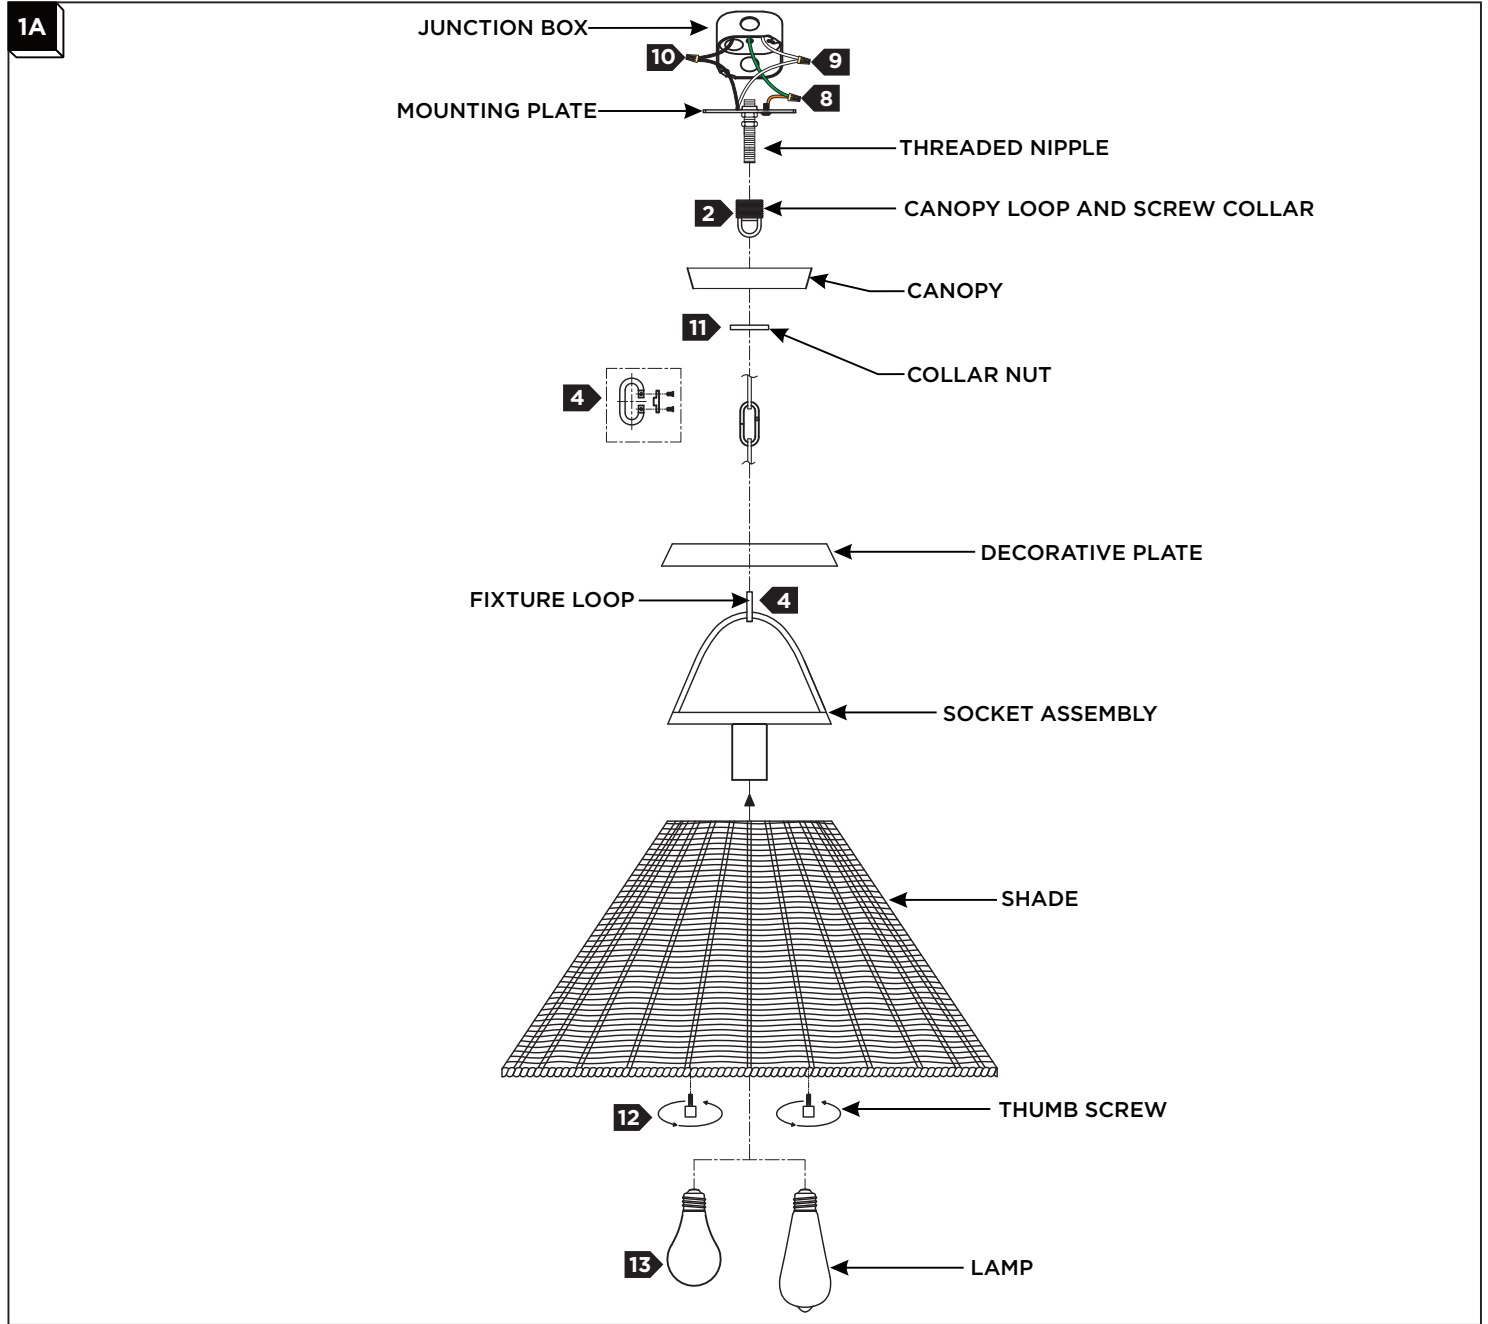

- 1** Secure the mounting plate to the junction box.
- 2** Install the screw collar to the threaded nipple.
- 3** Determine the wanted height of the fixture and remove a portion of the chain from the bottom by opening a link with pliers.
- 4** Screw the screw collar and canopy loop on to the threaded nipple.
- 5** Install a quick link to bottom end of the chain, then secure the link onto the fixture loop.
- 6** Weave the cord and safety cable through the chain, decorative plate, collar nut, canopy loop, and canopy, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 7** Install a quick link onto the remaining end of the chain, then secure the quick link onto the canopy loop.
- 8** Connect the fixture to a suitable ground in accordance with local electrical codes.
- 9** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 10** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 11** Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place by screwing the collar nut tightly onto the mounting plate.
- 12** Lift the shade up to the socket assembly and secure it in place with the two thumb screws.
- 13** Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.