

2 Inch

Trimless Downlight


- Durable airtight aluminum body
- Type IC, Air-Tight & Wet - No Housing Required
- Flangeless installation, provide a more high end looking
- No housing required, easy and fast installation
- 100%-10% dimming capability. This fixture is compatible with industry standard forward-phase / reverse-phase and TRIAC/ELV dimmers
- Rated for long life - over 50,000 hours




SPECIFICATIONS	
Application	Recessed Ceiling Mount
Watts	8W
CRI	90Ra+
Color Temperature(K)	5CCT Selectable (3K Optional)
Light Output(lm)	600lm
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Wet Location
Air Tight	Yes
Operating Temp.	(-4°F-104°F) -20-40°C
Beam Angle	38°

ORDERING


MODELS	CCT	FINISH
R2RTL-IC-8W-3D90-MW	3000K	MW(Matte White)
R2STL-IC-8W-3D90-MW	3000K	
R2RTL-IC-8W-5CCT-D90-MW	5CCT selectable	
R2STL-IC-8W-5CCT-D90-MW	(2700-5000K)	

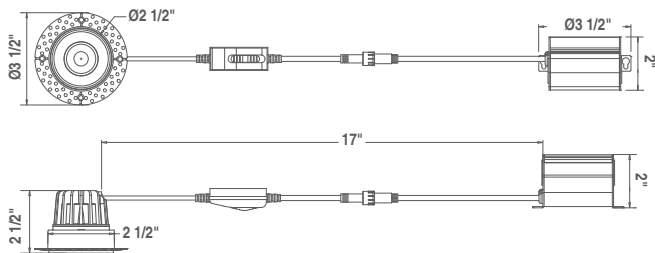

2in Round 8W Trimless Downlight

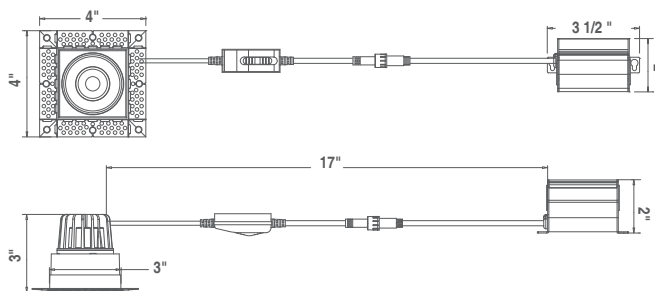

2in Square 8W Trimless Downlight

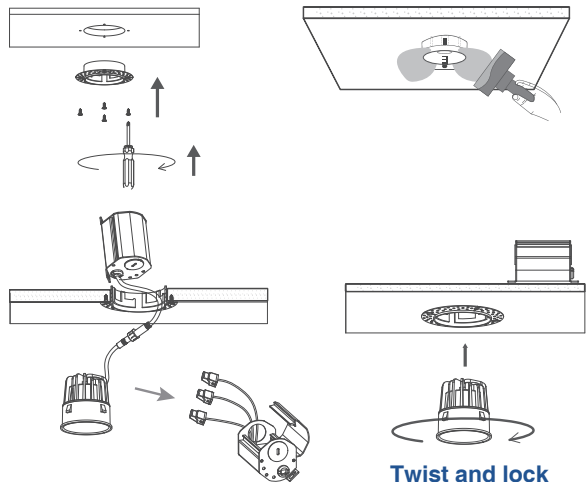


Twist and lock

CUT
Cut Hole Size
Round: Ø2 3/5"
Square: 2 4/5" x 2 4/5"



Accessories

Mounting Plates



R2.5-4-6-NC
See Page 19

Emergency Backup





BL-ELD-15W
See Page 19

2


Inch

Trimless Downlight

- Durable airtight aluminum body
- Type IC, Air-Tight & Wet - No Housing Required
- Flangeless installation, provide a more high end looking
- Easy and fast installation.
- 100%-10% dimming capability. This fixture is compatible with industry standard forward-phase / reverse-phase and TRIAC/ELV dimmers
- Rated for long life - over 50,000 hours

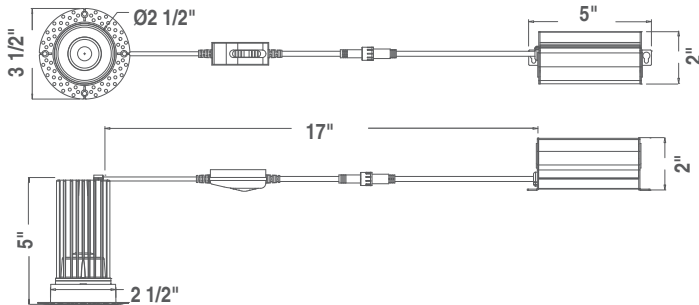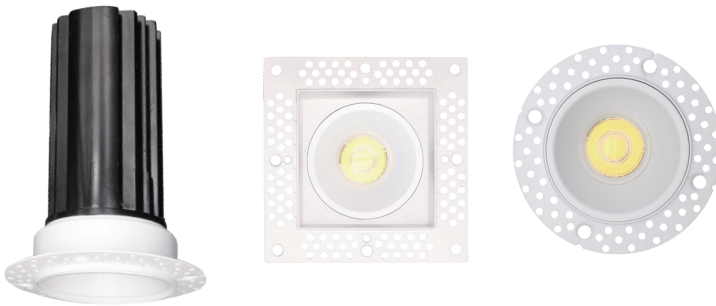

2 inch Round 15W Trimless Downlight


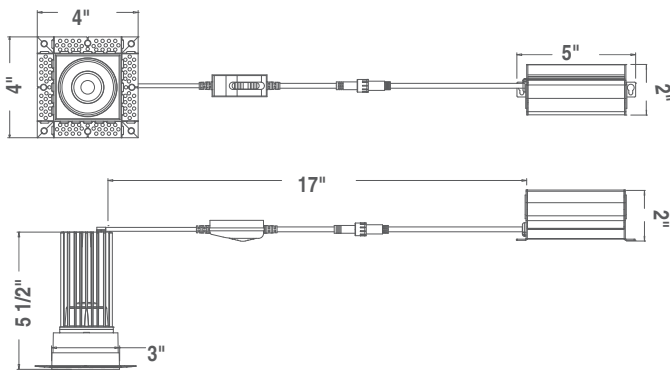


2 inch Square 15W Trimless Downlight

SPECIFICATIONS	
Application	Recessed Ceiling Mount
Watts	15W
CRI	90Ra+
Color Temperature(K)	5CCT Selectable (1CCT Optional)
Light Output(lm)	1000lm
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Wet Location
Air Tight	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	38°

ORDERING


MODELS	CCT	FINISH
RA2RTL-IC-15W-3D90-MW RA2STL-IC-15W-3D90-MW	3000k	MW(Matte White)
RA2RTL-IC-15W-5CCT-D90-MW RA2STL-IC-15W-5CCT-D90-MW	5CCT selectable (2700-5000K)	

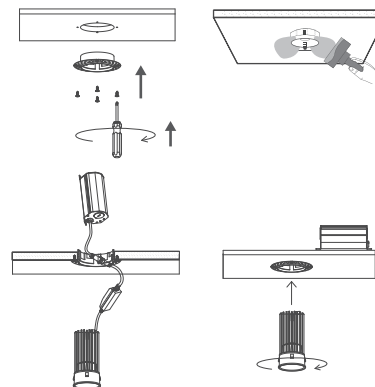

Twist and lock

Accessories

Mounting Plates



R2.5-4-6-NC
See Page 18

Emergency Backup



BL-ELD-15W
See Page 18

