
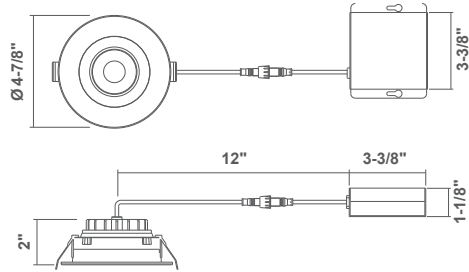


4


Inch

LED Regress Gimbal

- Durable Aluminum body with adjustable gimbal
- Tilting gimbal light source for directional lighting
- Dimming: TRIAC down to 10%
- I.C. rated for direct contact with insulation
- Suitable for DAMP LOCATION
- Rated for a long life - over 50,000 hours

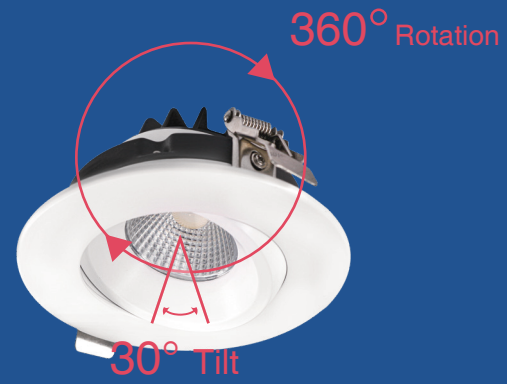

4" LED Regress Gimbal - Round

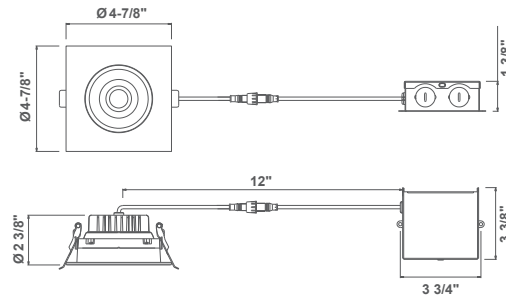


4" LED Regress Gimbal - Square

SPECIFICATIONS	
Application	Recessed Ceiling Mount
Watts	12W
CRI	90Ra+
Color Temperature(K)	5CCT Selectable 2700K to 5000K
Light Output(lm)	850lm
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Damp Location
Air Tight	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	40°




Cut Hole Size Ø4-3/8"

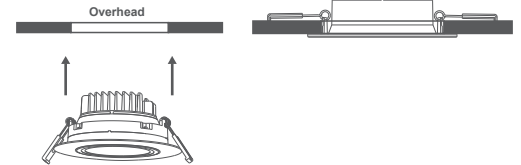

Accessories

Mounting Plate



R2.5-4-6-NC

See Page 21

Mounting Plate



R4-NC

See Page 21

Emergency Driver



BL-ELD-15W

See Page 21

Ordering

MODELS	CCT	FINISH
RA4RG-12W-5CCT-D90-MW RA4SG-12W-5CCT-D90-MW	5CCT(selectable CCT 2700-5000K)	MW(Matte White)