

4 Inch

Trimless Downlight

- Durable airtight aluminum body
- Type IC, Air-Tight & Wet - No Housing Required
- Flangeless installation, provide a more high end looking
- No housing required, easy and fast installation
- 100%-10% dimming capability. This fixture is compatible with industry standard forward-phase / reverse-phase and TRIAC/ELV dimmers
- Rated for long life - over 50,000 hours



WET LOCATION

DIMMABLE

AIR-TIGHT



IC-RATED







SPECIFICATIONS	
Application	Recessed Ceiling Mount
Watts	15W
CRI	90Ra+
Color Temperature(K)	5CCT Selectable
Light Output(lm)	1000lm
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Wet Location
Air Tight	Yes
Operating Temp.	(-4°F~-104°F) -20~40°C
Beam Angle	38°

ORDERING

MODELS	CCT	FINISH
RA4RTL-15W-5CCT-D90-MW	5CCT selectable (2700-5000K)	MW(Matte White)

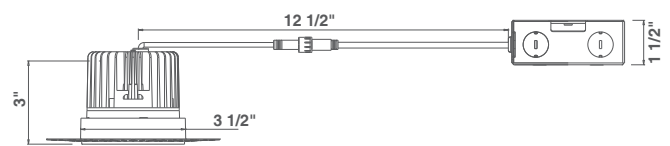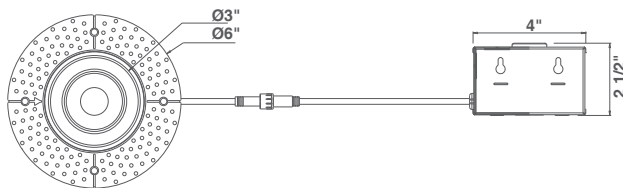


Cut Hole Size
03 3/4"

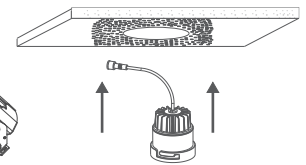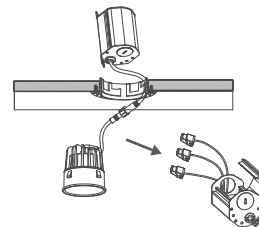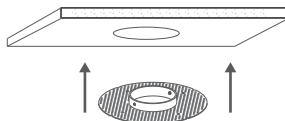

Twist and lock

Accessories

Mounting Plates



R2.5-4-6-NC
See Page 19

Mounting Plates



R4-NC
See Page 19

Emergency Backup



BL-ELD-15W
See Page 19

