


ASSEMBLY & INSTALLATION INSTRUCTIONS

Aspen Pendant Small - 401320

A1044

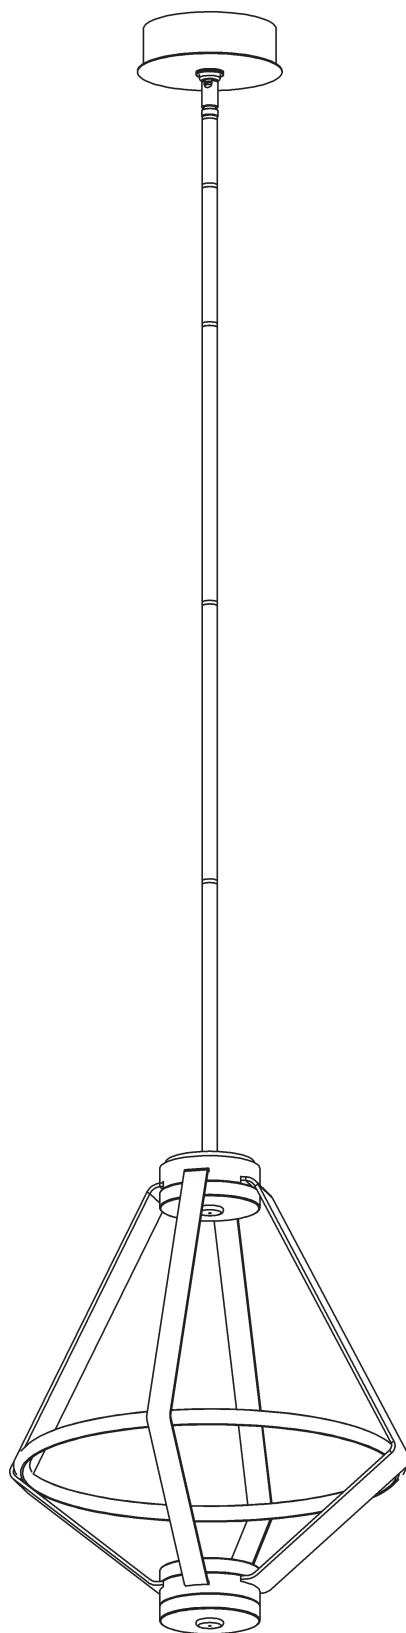

HUBBARDTON FORGE.

MODERN AMERICAN BLACKSMITHS | FINE, HAND CRAFTED LIGHTING
CASTLETON, VERMONT USA | HUBBARDTONFORGE.COM

59115 Rev A

1 OF 7

Component Parts

- A Fixture**
- B Crossbar**
- C Driver**
- D Cupped Washer**
- E Ground Screw**
- F Fixture Bracket**
- G # 8 Screw (2)**
- H Swivel**
- I Canopy**
- J Canopy Ring**
- K Stem Couplings (4)**
- L 3" Fixture Pipe**
- M 6" Fixture Pipe**
- N 12" Fixture Pipe (3)**
- O Leather Strap**
- P Alabaster (3)**
- Q Short Stud**
- R Long Stud**
- S Knob (3)**
- T LED Housing (2)**




CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician. This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture. Use only recommended bulbs with fixture.

Assemble Fixture (Figure 1 and 2 - on following page)

1. Carefully unpack all items from carton.
 2. Carefully unwrap leather strap (O).
 3. Slide wires from LED housing (T) on leather strap (O) up through top of fixture (A).
 4. Locate short stud (Q), with one knob (S) attached. Remove knob and retain for later use.
 5. Thread short stud (Q) into top of fixture (A).
 6. Carefully move LED housing (T) into place on fixture while being sure to pull excess wire up through top of fixture.
- Note:** Leather strap will slide into cut outs on top of fixture.
7. Slide alabaster (P) over short stud (Q). Secure all items by threading knob (S) back onto short stud (Q). Be sure stud is fully seated in knob (S).
 8. Follow steps on next page to complete fixture assembly.

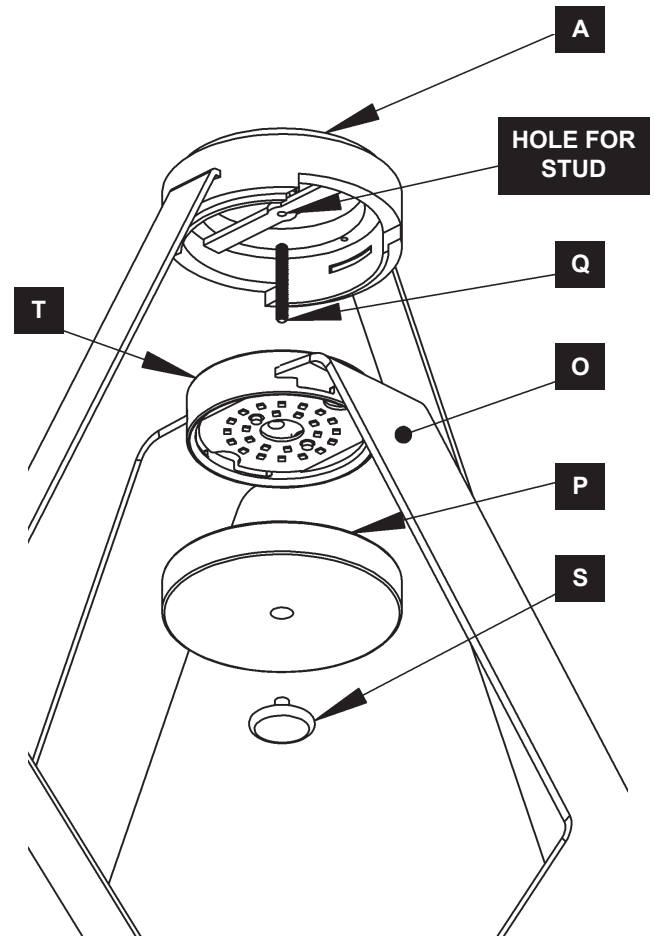

(Figure 1)

ASSEMBLY & INSTALLATION INSTRUCTIONS


A1044

Aspen Pendant Small - 401320

9. Locate long stud (R) with two knobs (S) attached. Remove one knob (S) and retain for later step.
10. Place long stud (R) through alabaster (P), LED housing (T) and center in fixture (A).
11. Slide remaining piece of alabaster (P) over long stud (R) and secure all items by threading knob (S) onto long stud (R) and tightening.

Note: There will be tension on the leather strap. Strap should be located in cut outs on fixture body.

12. Follow steps on remaining pages to install fixture to ceiling.

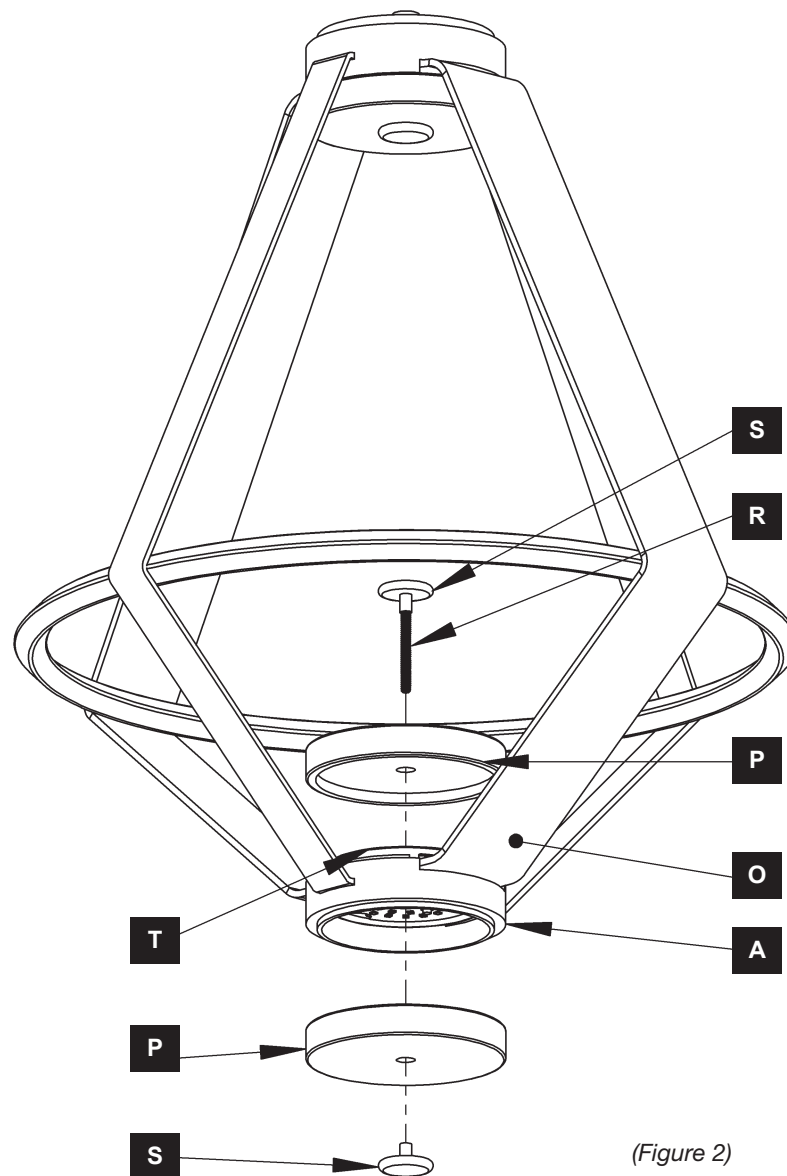

(Figure 2)



HUBBARDTON FORGE.

MODERN AMERICAN BLACKSMITHS | FINE, HAND CRAFTED LIGHTING
CASTLETON, VERMONT USA | HUBBARDTONFORGE.COM

59115 Rev A

4 OF 7

ASSEMBLY & INSTALLATION INSTRUCTIONS

A1044

Aspen Pendant Small - 401320

Install Fixture (Figure 3 - on following page)

- Using two machine screws (not provided), fasten crossbar (B) & driver (C) to the electric box .

Note: A new electric box comes with screws. When replacing a fixture, retain the existing screws for use with the new fixture.

- Using suitable wire connectors (not provided), connect driver wires (C) to supply wires (white to white supply, black to black supply). Run a pigtail lead from crossbar (B) to junction box using green ground screw (E) and cupped washer (D).

CAUTION: MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY AND NO BARE WIRE IS EXPOSED.

- Locate fixture pipes (L,M,N), fixture (A), stem couplings (K) . Stem couplings (K) can be found in the kit bag.
- Provided are multiple fixture pipes in three different lengths. Choose the combination that will achieve the overall height desired. Refer to the table below to determine the pipes required to reach the desired overall height. Once you have determined the components necessary, feed the wires that exit fixture (A) through the individual components and thread pipes and nipples together. Wires will slip easier through loose components than through pipes and nipples that are pre-assembled. Once wires are run, apply thread locking compound to all the connection points and assemble the pipes and couplings.

		Overall Height of Fixture														
		26.8	29.8	32.8	35.8	38.8	41.8	44.8	47.8	50.8	53.8	56.8	59.8	62.8	65.8	68.8
# of Pipes Required	3" Pipe (L)	1		1		1		1		1		1		1		1
	6" Pipe (M)		1	1			1	1			1	1			1	1
	12" Pipe (N)				1	1	1	1	2	2	2	2	3	3	3	3

- Carefully slide canopy ring (J) and canopy (I) over wires and fixture pipes (L,M,N) until they rest on fixture (A).
 - Slip wires from the fixture (A) through assembled swivel (H) and fixture bracket (F)
 - Using #8 screws (G), that are shipped in crossbar (B), fasten fixture bracket (F) to crossbar (B) taking caution not to pinch any wires.
 - Using provided wire connectors, attach fixture wires to driver (C) DC output wires (red to red and blue to blue).
- Note:** Wire connectors are shipped attached to driver output wires. Fixture wires must be stripped before inserted into provided wire connector.
- Hold canopy (I) close to ceiling and connect all ground wires (bare copper or green to bare copper or green). Push wires back into electric box.

CAUTION: MAKE SURE WIRE CONNECTORS ARE TWISTED ON SECURELY AND NO BARE WIRE IS EXPOSED.

- Slide canopy (I) against ceiling, and secure with canopy ring (J).

CAUTION: BE SURE NO WIRES ARE PINCHED BETWEEN THE CANOPY AND THE CEILING.



HUBBARDTON FORGE.

MODERN AMERICAN BLACKSMITHS | FINE, HAND CRAFTED LIGHTING
CASTLETON, VERMONT USA | HUBBARDTONFORGE.COM


59115 Rev A

5 OF 7

ASSEMBLY & INSTALLATION INSTRUCTIONS

Aspen Pendant Small - 401320

A1044

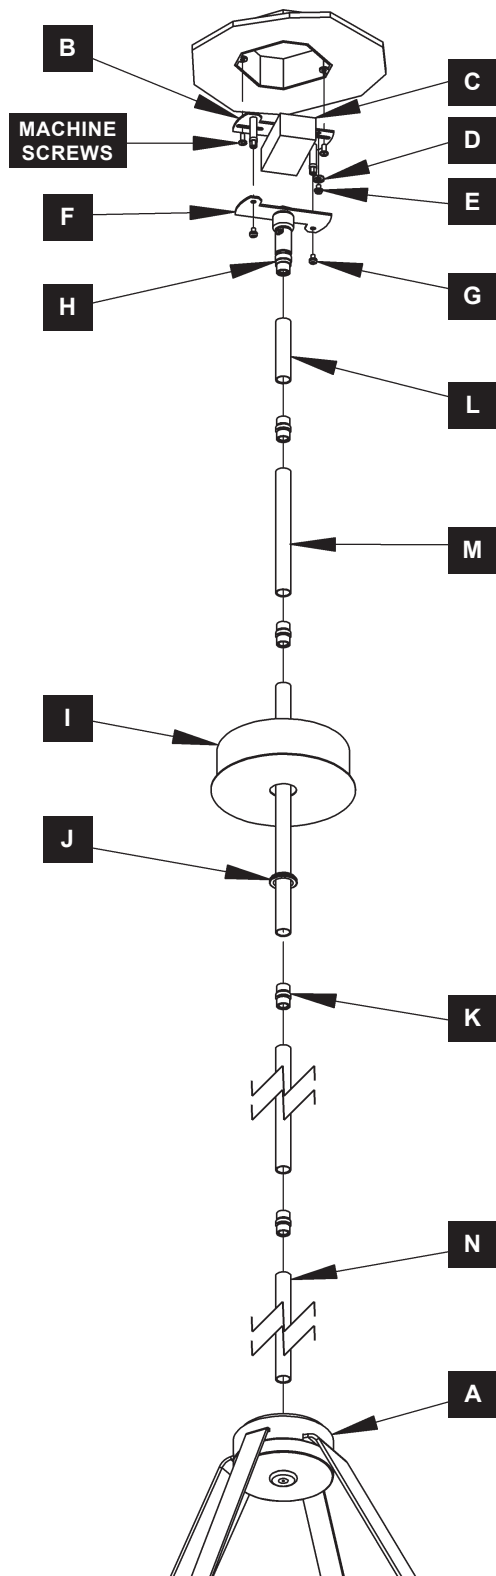

(Figure 3)



HUBBARDTON FORGE.

MODERN AMERICAN BLACKSMITHS | FINE, HAND CRAFTED LIGHTING
CASTLETON, VERMONT USA | HUBBARDTONFORGE.COM

59115 Rev A

6 OF 7

ASSEMBLY & INSTALLATION INSTRUCTIONS

A1044

Aspen Pendant Small - 401320

Product Care & Cleaning:

Leather: Leather is a natural product and straps can have variations in color and imperfections in the hides. This leather can be oiled or dyed to enhance the look. For cleaning, wipe entire surface with a soft cloth and cool water to even out any abrasions or stains. Do not spot rub, for it will darken only that area. Occasional use of Aniline Leather Cleaner, Conditioner, & Protector, or Aniline Leather Maintenance Kit is recommended. Other leather cleaners such as saddle soap or household cleaners that may contain harsh chemicals, alcohol, or ink removers should never be used.

Alabaster: Use a dry soft cloth or a “feather duster” to remove any dust accumulation. Raw alabaster should not be polished with wax, or cleaned with wet or acidic cleaners.

If you need further assistance, or find that you are missing any parts, please contact the dealer from which you purchased this product. We hope you enjoy your fixture!

**** Hubbardton Forge will not be liable for injury or damage caused by improper installation, lamping or use of this fixture.***