


ASSEMBLY INSTRUCTIONS

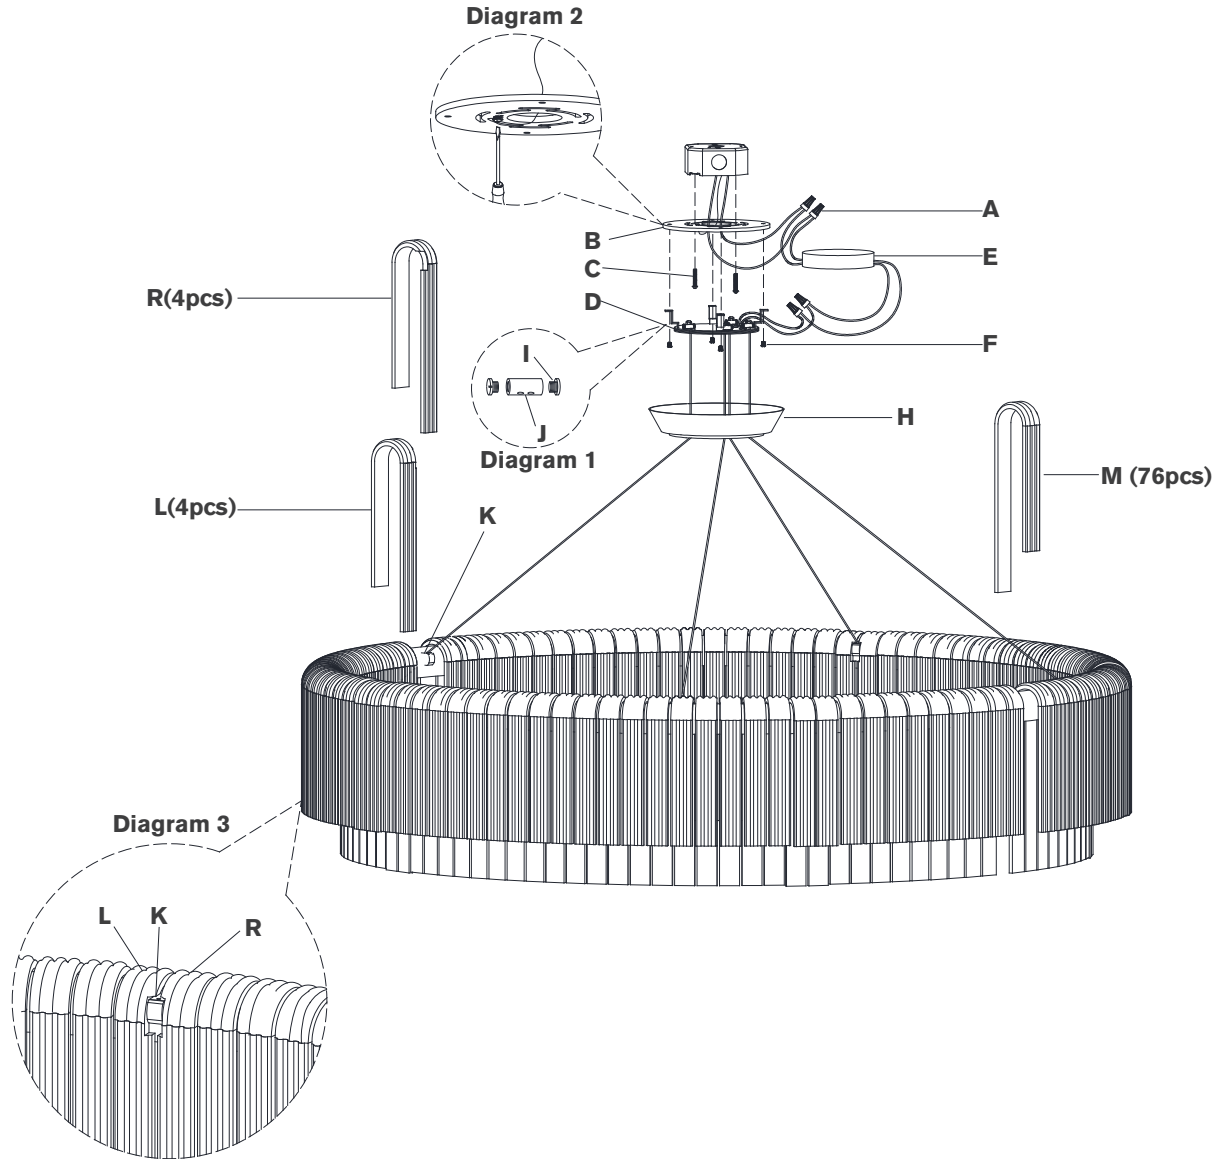

Emre 36" One-Tier Chandelier

Item # IKF5902

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Wire Cutters
Wire Strippers	Pencil	Hammer
Drill		

PERSONS REQUIRED: Two

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove canopy (H) from metal bracket (D) by unscrewing.
3. Remove metal bracket (D) from mounting plate (B) by removing screws (F).
4. Install mounting plate (B) to junction box and secure with mounting screws (C).
5. Feed hanging cables through canopy (H) and the holes of metal bracket (D).
6. Install cable locks (J) to end of hanging cables. Insert hanging cable through other end of locks and tighten ends (I) to secure (see diagram 1).
7. Adjust hanging cables to desired height and level fixture.

NOTE: Double check height and ensure fixture is level before moving to next step.

8. Cut excess wires, being sure to leave enough to reach the junction box. Separate fixture wires (marked "+" & "-") and strip insulation on each 5/8".

NOTE: It is recommended to have a helper assist in supporting the fixture for steps 9-15.


9. Connect supply ground wire (usually green or bare copper) around the green grounding screw (see diagram 2). Tighten.

NOTE: It is imperative that the fixture is grounded.

VISUAL COMFORT



ASSEMBLY INSTRUCTIONS

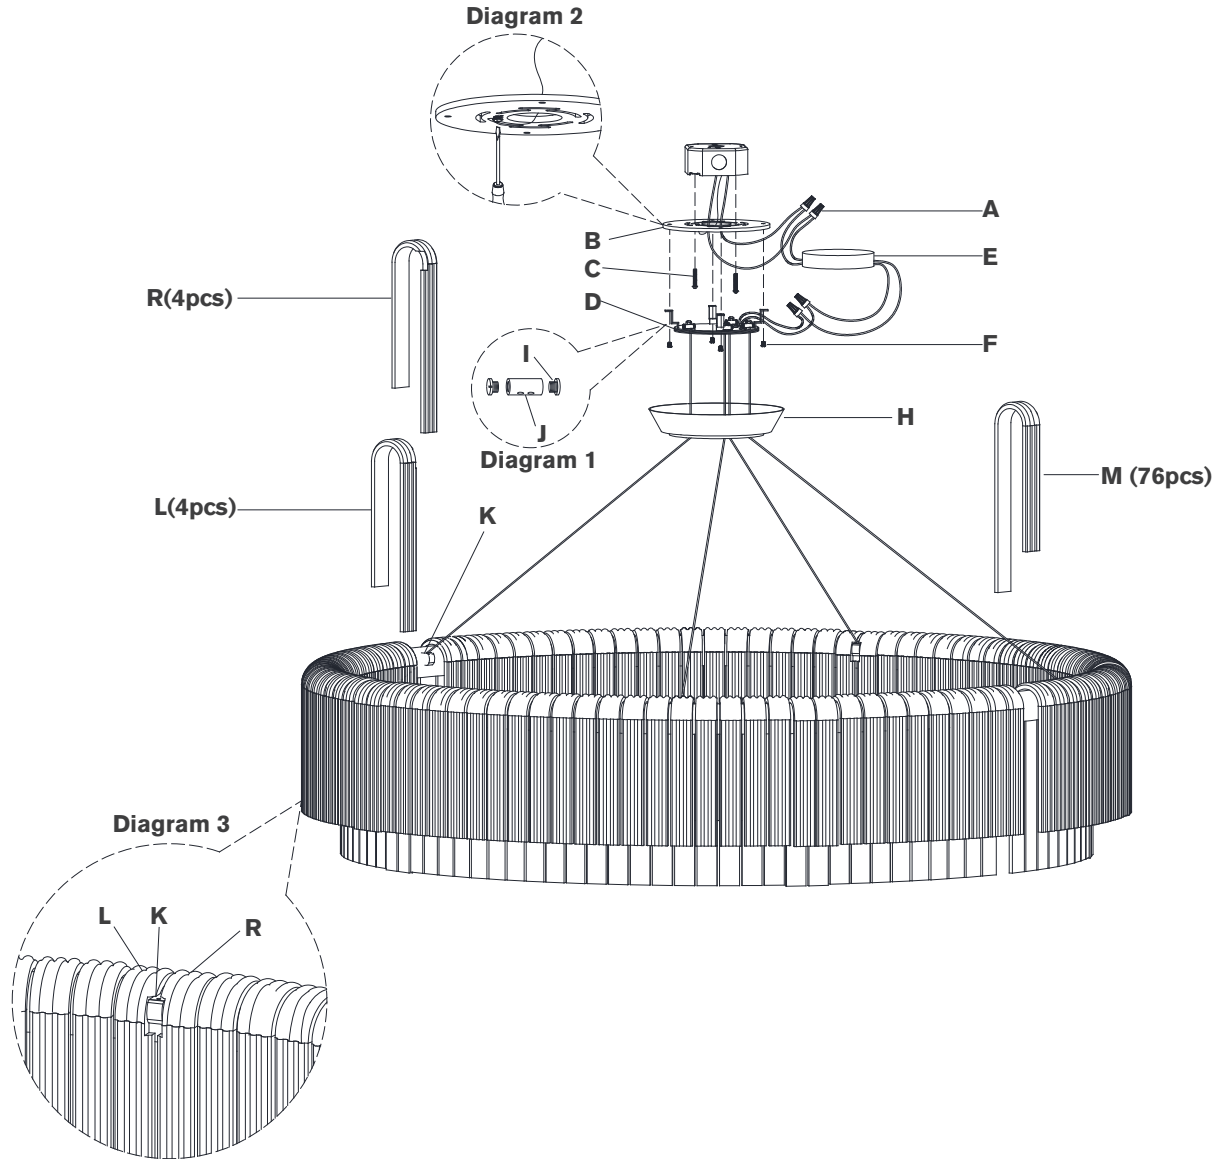

Emre 36" One-Tier Chandelier

Item # IKF5902

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

10. Connect driver (E) input neutral wire (white) to the supply neutral wire (usually white) using wire nut (A).
11. Connect driver (E) input hot wire (black) to the supply hot wire (usually black) using wire nut (A).

CAUTION: Do not reverse the hot and neutral connections.

12. Make sure all wire connections are tight, then carefully tuck into the junction box.
13. Install driver (E) and metal bracket (D) to mounting plate (B) and secure with screws (F).
14. Connect driver (E) output neutral wire (black) to the fixture neutral wire (marked "-") using wire nut (A).
15. Connect driver (E) output hot wire (red) to the fixture hot wire (marked "+") using wire nut (A).

CAUTION: Do not reverse the hot and neutral connections.

16. Make sure all wire connections are tight, then carefully tuck into the metal bracket (D).
17. Thread canopy (H) to metal bracket (D).
18. Insert glass sheets (R) (marked "R") to right of brackets (K), then insert glass sheets (L) (marked "L") to left of brackets (K) (see diagram 3).

NOTE: Do not over-tighten otherwise glass sheets could become damaged.

19. Insert glass sheets (M) to fixture frame.

NOTE: Do not over-tighten otherwise glass sheets could become damaged.

Care Instructions: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

VISUAL COMFORT

