


**Figure 1**

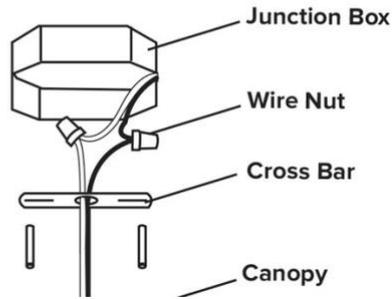

# REGINA ANDREW

DETROIT


**ITEM NO: 16-1472**  
**Bijoux Crystal Flush Mount**

**CAREFULLY INSPECT THE ITEM BEFORE INSTALLATION.**

**WE STRONGLY RECOMMEND THE ITEM BE INSTALLED BY A LICENSED ELECTRICIAN.** These instructions are provided for your safety. It is very important that they are read completely before beginning the installation of your fixture.

## FOR WIRING DIRECTLY INTO THE JUNCTION BOX (Figure1)

1. Turn off the breaker to the junction box at the electrical panel.
2. Inspect all parts and inventory, making sure to check all sides of the packaging for additional parts.
3. Install the crossbar with the attached screw collar loop onto the junction box with the included machine screws.
4. Attach ground wire from fixture to ground wire from junction box. Fasten wires together with wire nut and tightly wrap connection with electrical tape. Attach hot wire from fixture (black color or smooth side of wire) to hot wire from junction box. Fasten wires together with wire nut and tightly wrap connection with electrical tape. Attach neutral wire from fixture (white in color or ribbed side of wire) to neutral wire from junction box. Fasten wires together with wire nut and tightly wrap connection with electrical tape. Carefully push wire connections back into ceiling junction box.
5. Carefully slide the canopy, followed by the canopy collar over the socket, and secure the canopy to the ceiling by threading the canopy collar.

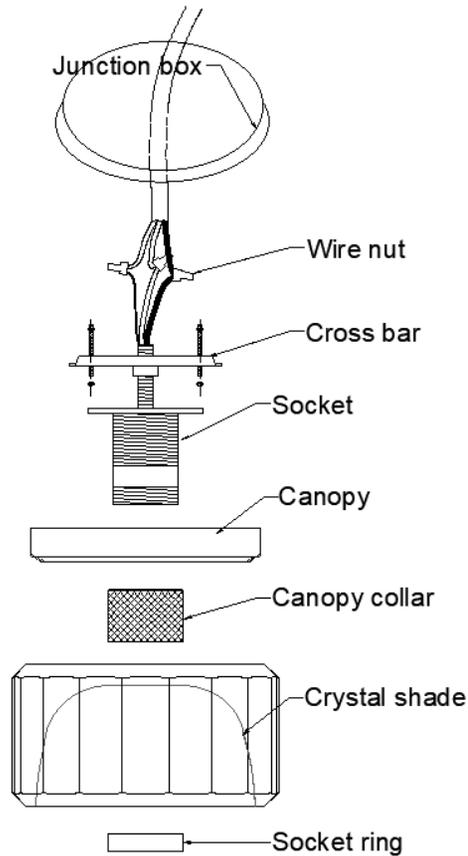

## FIXTURE ASSEMBLY (Figure 2)

1. Put the crystal shade on and secure with the socket ring.
2. Insert the appropriate bulbs into the sockets. Turn the breaker to the junction box back on and enjoy.