

# UTTERMOST

## ASSEMBLY INSTRUCTIONS


22571

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

*We suggest a licensed electrician for all fixture installations*

### Installation Steps

1. Carefully unpack your new fixture and lay out all the parts on a clear surface.
2. Use the mounting bracket and mark the center hole and slots using a pencil. Repeat at the other end of the marked location. Ensure that the markings from center to center are be 53mm apart before drilling.
3. Drill holes at the slot markings using a drill and drill bit suitable for your wall type. Push the plastic anchors in to the wall.
4. Secure the set screws into the plastic anchors properly, then hang the key holes of the back plate over the sets screws well.
5. Assemble the Stem-1 and Stem-2 together using the Nipple.
6. Install the shade onto the Socket, then secure with the Socket ring.
7. Install the light bulb in accordance with the fixture's specifications.  
**DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**
8. Plug in the fixture and turn on the light.

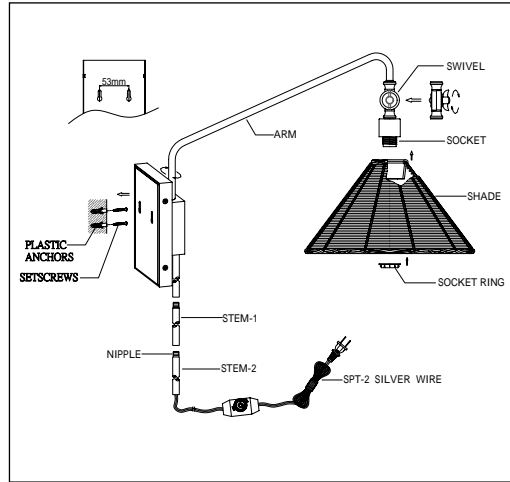

# UTTERMOST

## ASSEMBLY INSTRUCTIONS

22571

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

*We suggest a licensed electrician for all fixture installations*

### Installation Steps

1. Carefully unpack your new fixture and lay out all the parts on a clear surface.
2. Thread the Mounting screws into the matching holes of the Mounting bar, and tighten with the Hex nut. Thread the Ground screw into the hole of the Mounting bar. Secure the Mounting bar to the outlet box with the Outlet box screws.
3. Make Wire connections with Wire Connector:
  - The smooth wire (w/ marking) from fixture to Black Wire from power source.
  - The ribbed wire (w/o marking) from Fixture to White Wire from power source.
  - Attach the Ground Wire and house ground wire to the Mounting bar with the green Ground screw.
 Carefully tuck wires back into the Outlet Box.
4. Place the fixture Back plate over the two Mounting screws so they protrude through the holes in the Back plate. Thread the Ball nut onto the Mounting screws and continue turning until the fixture is snug against the ceiling.
5. Put the shade onto the Socket, then secure with the Socket ring.
6. Install the light bulb in accordance with the fixture's specifications.  
**DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**
7. Turn on the power at fuse or Circuit Box.

