
UTTERMOST

ASSEMBLY INSTRUCTIONS

22599

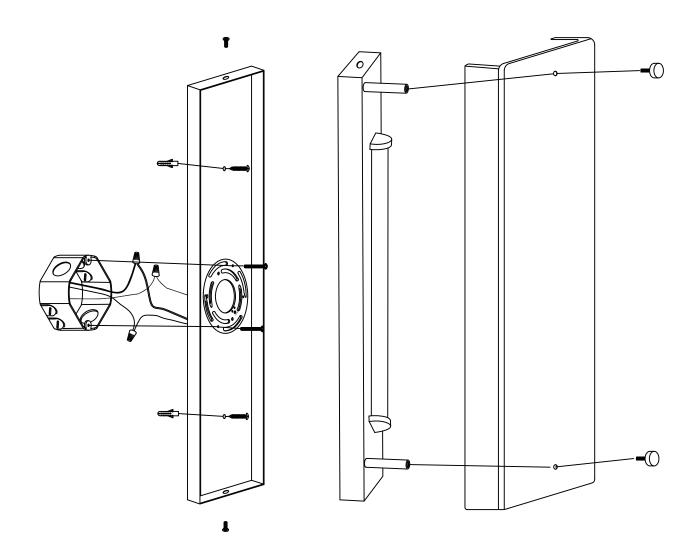

- 1. Install the back plate and connecting the wires refer to the next page.
- 2. Place the fixture's back plate over mounting strap so that the holes in the side of mounting strap line up with the holes in back plate. Use a screwdriver to thread screws into back plate until back plate is snug against the wall.
- 3. Install the glass on the frame with nut and washer.

UTTERMOST

ASSEMBLY INSTRUCTIONS

FOR WALL MOUNT FIXTURE

NOTE: ALWAYS TURN POWER OFF BEFORE INSTALLING LIGHTING FIXTURES!
IMPORTANT: YOU SHOULD USE A QUALIFIED ELECTRICIAN TO INSTALL THIS FIXTURE.

Installation (see Fig.A)

- 1. Disconnect power at main electrical panel before installation.
- Pull Supply Wires through larger hole in mounting plate (hole has smooth edge).
- Attach Mounting Plate to Outlet Box using Box Screws provided with Outlet Box. For additional stability on longer fixtures, install Mounting Screws into appropriate Fasteners (Fasteners not provided).
- 4. Follow wiring instructions carefully (listed below).
- Position Coverplate over Mounting Plate, alligning Studs with Coverplate holes and secure with Ballnuts.

Wiring (see Fig.B)

- Split the conductors of the **fixture wire** about 4 inches. Being careful not to expose any of the wire inside of the insulation.
- Connect the fixture ground wire to the outlet box ground wire using wirenut (not provided). Connect outlet box ground wire to mounting plate with GREEN hex-head ground screw to tapped hole in mounting plate marked "GND".
- Connect the half of the fixture wire that is white, marked, or has a ribbed surface to the outlet box supply wire (WHITE). Connect the other half of the fixture wire that is black, unmarked, or has a smooth surface to the outlet box supply wire (BLACK or RED). Use wirenuts provided.
- 4. Spread the electrical splices so that the black wire are on one side of the **outlet box** and the white wire are on the other side.

