

# INSTALLATION INSTRUCTIONS

Item#3895-613 (New. 03/18/2021)

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clean area. Take care not to lose any small parts necessary for installation.
3. Secure rod (M) onto the all thread (N) on the fixture body.
4. Determine the desired hanging height and thread rods (F1, F2 and F3) to the all thread on rod (M). Attach canopy (D) by screwing onto rod (F1). Carefully pass the wires through each rod during assembly. Note: Remove the all thread, if installing with one 6" rod only.
5. Attach mounting plate (A) to the outlet box (not included), with mounting screws (B) (Size: #8-32N\*L0.5"). The side of the mounting plate (A) with "GND" marked on it and two convex points must face out.

### CONNECTING THE WIRES (Fig. 2)

6. Connect the electrical wires as shown in fig 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (A) using the green screw provided.
7. Tuck the wire connectors neatly into the outlet box.

### FINISHING THE INSTALLATION (Fig.1)

8. Slide canopy (D) over mounting plate (A) and secure with screws (E).
9. Place candle covers (J) over sockets (I).
10. Install (6) six candelabra base bulbs (K) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
11. Place glass shade (L) over metal cup (H) and adjust if needed.

**Note: If you find that the glass shade (L) cannot be installed, please reverse the side to install again and be careful not to scratch the surface of the fixture.**

Your installation is now complete. Return power and test the fixture.


**Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

Fig. 1

Set# A-021-143D


- Mounting plate
- Ground screw
- Mounting screws\*2

Rod# W35-1-613\*1(F1)  
W35-1-613\*2(F2)  
W35-H-613\*1(F3)

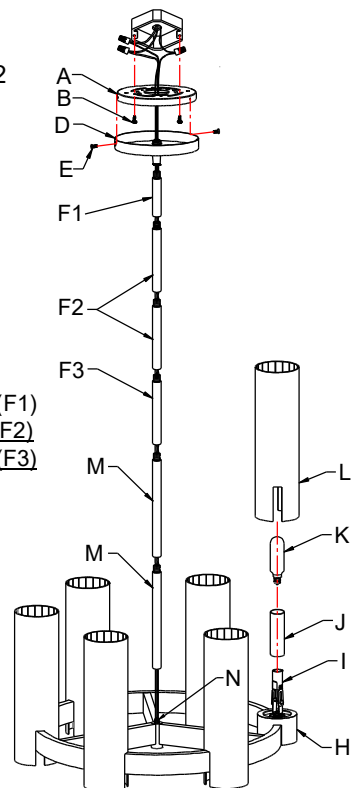

Candle Cover#CCV24082P-613

Fig. 2

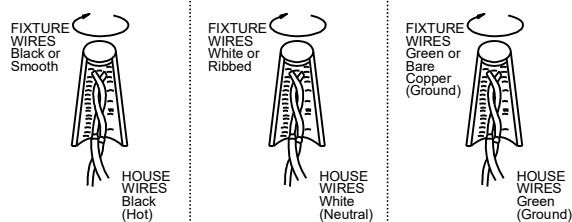

# INSTALLATION INSTRUCTIONS

Item#3898-613 (New. 2021/03/17)

## READ AND SAVE THESE INSTRUCTIONS

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**

**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

### MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clean area. Take care not to lose any small parts necessary for installation.
3. Secure rod (M) onto the all thread (N) on the fixture body.
4. Determine the desired hanging height and thread rods (F1, F2 and F3) to the all thread on rod (M). Attach canopy (D) by screwing onto rod (F1). Carefully pass the wires through each rod during assembly. Note: Remove the all thread, if installing with one 6" rod only.
5. Position the mounting plate (A) on the ceiling and mark location of the two mounting holes. Drill the holes on the ceiling and insert the plastic anchors (P).
6. Attach mounting plate (A) to the outlet box (not included) using mounting screws (B) (Size: #8-32N\*L0.5") and wood screws (Q) into drywall anchors (P). The side of the mounting plate marked "GND" must face out.
7. The support cable is provided to support the weight of the fixture while wiring. Align the fixture to mounting plate (A) and attach hook (G) on the end of support cable (C) into a slot located on mounting plate (A). Carefully allow the support cable (C) to support the weight of the fixture while wiring (Fig.1).

### CONNECTING THE WIRES (Fig. 2)

8. Connect the electrical wires as shown in fig.3, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (A) using the green screw provided.
9. Tuck the wire connectors neatly into the outlet box.

### FINISHING THE INSTALLATION (Fig.1)

10. Slide canopy (D) over mounting plate (A) and secure with screws (E).
11. Place candle covers (J) over sockets (I).
12. Install (8) eight candelabra base bulbs (K) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!**
13. Place glass shade (L) over metal cup (H) and adjust if needed.


**Note: If you find that the glass shade (L) cannot be installed, please reverse the side to install again and be careful not to scratch the surface of the fixture.**

Your installation is now complete. Return power and test the fixture.

**Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.**

Fig. 1

Set#A-021-143D  
-Mounting Screw\*2  
-Ground Screw  
-Mounting Plate

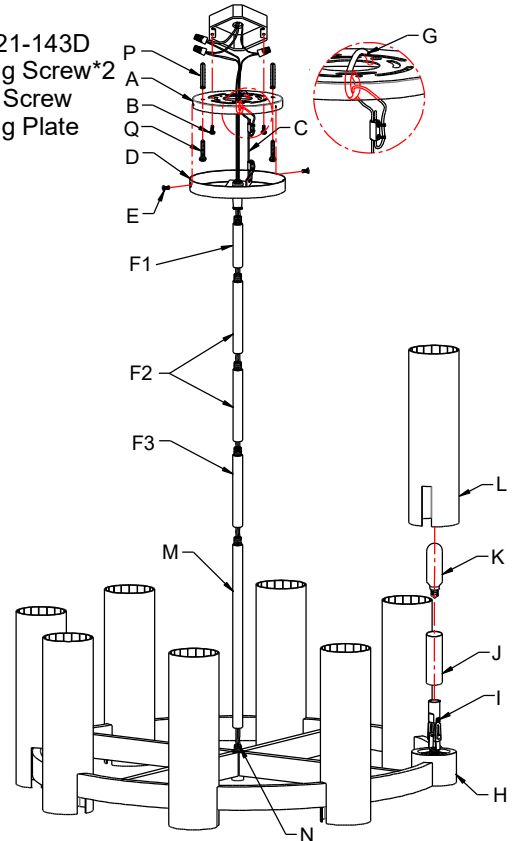

Rod# W35-1-613\*1(F1)  
W35-1-613\*2(F2)  
W35-H-613\*1(F3)

Candle cover#CCV24082P-613

Fig. 2

