


INSTALLATION INSTRUCTIONS FOR FIXTURE

Item#4655-579 (New. 2021/02/01)

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.


ASSEMBLING THE FIXTURE (FIG. 1)

1. Shut of power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. The arms are collapsed to lay flat for shipping, turn the arms carefully so that they are evenly spaced apart. (See Fig. 1)
4. Thread fixture loop (A) onto all thread (B).
5. Place cap (E) and font (G) onto the arms and secure long all thread (F) and both finials (D).

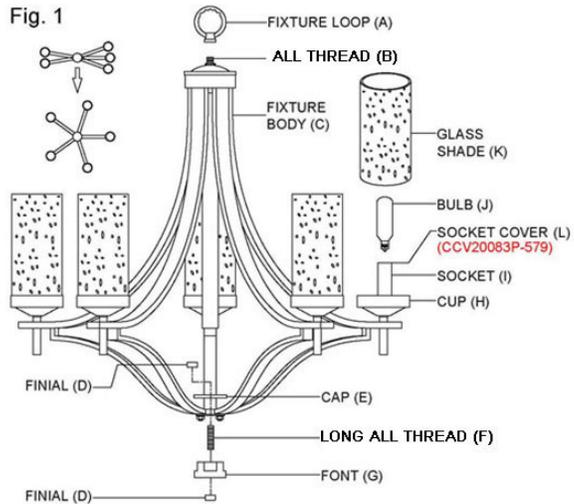

MOUNTING THE FIXTURE (FIG. 2)

6. Thread all thread (S) into collar loop (T).
7. Thread hex nut (R) to the other end of all thread (S). Place the lock washer (Q) over all thread (S) and thread into the crossbar (P). Secure all thread (S) to crossbar (P) with lock washer (Q) and hex nut (R).
8. Take this crossbar assembly and mount to outlet box (V) using outlet box screws (W). The side of crossbar marked "GND" must be face out.
9. Use proper chain pliers to open one end link of chain (X) and connect to fixture loop (A). Close the link.
10. By measuring, determine the correct number of links needed for proper hanging height. Using the chain pliers, disconnect and discard the remaining chain (X).
11. Carefully lace the fixture wires through the chain (X).
12. Slide collar ring (Y) over chain (X), then do the same with canopy (U).
13. Open the other end link of chain (X) and connect to collar loop (T). Close the link.
14. Feed fixture wires through collar loop (T) and all thread (S) and pull the fixture wires until tight.

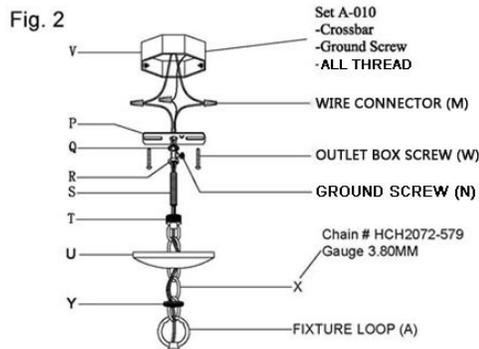

CONNECTING THE WIRE (See fig.3)

15. Connect the electrical wires as shown in Fig. 3, making sure that all wire connectors (M) are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the crossbar (P) using the ground green screw (N) provided.
16. Tuck wire connectors (M) neatly into the outlet box and raise canopy (U) over collar loop (T) and secure with collar ring (Y).
17. Install (5) five candelabra base bulbs (J) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!**
18. Insert glass shades (K) into cups (H).

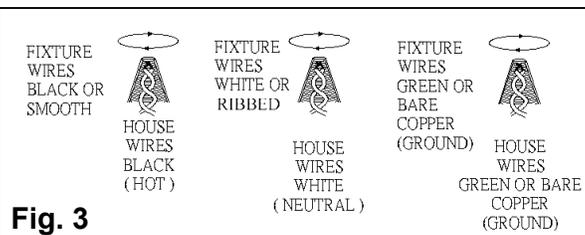


Fig. 3

Your installation is now complete. Return power to the outlet box and test the fixture.



Notice: It is important to use proper chain pliers (not included) to OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.



LA-3301E

INSTALLATION INSTRUCTIONS FOR FIXTURE #4659-579

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

ASSEMBLING THE FIXTURE (FIG. 1)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture including the mounting hardware.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
3. The arms have been turned to lay flat for shipping, turn the arms carefully so that they are evenly spaced apart. (See Fig. 1)
4. Thread the fixture loop (A) onto the nipple (B).
5. Place the cap (E) and font (G) onto the arms, then secure with long nipple (F) and two finials (D).




MOUNTING THE FIXTURE (FIG. 2)

1. Thread the nipple (S) into the collar loop (T).
2. Thread the hex nut (R) to the other end of nipple (S), place the lock washer (Q) over the nipple (S), and thread the nipple (S) into the crossbar (P), and then secure the nipple (S) to the crossbar (P) with the lock washer (Q) and the hex nut (R).
3. Take this crossbar assembly and mount to ceiling outlet box (V) using outlet box screws (W). The side of crossbar marked "GND" must face out.
4. Use proper chain pliers to open one end link of the chain (X) and connect to the fixture loop (A). Close the link.
5. By measuring, determine the correct number of links needed for proper hanging height. Using the chain pliers, disconnect and discard the remaining chain (X).
6. Carefully lace the fixture wires through the chain (X).
7. Slide the collar ring (Y) over the chain (X), then do the same with canopy (U).
8. Open the other end link of the chain (X) and connect to the collar loop (T). Close the link.
9. Feed the fixture wires through the collar loop (T) and nipple (S), then pull the fixture wires until tight.

CONNECTING THE WIRE (See fig.3)

1. At this point, connect the electrical wires as shown in Fig. 3, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the crossbar using the green screw provided.
2. Tuck the wire connectors neatly into the ceiling outlet box and raise the canopy (U) and collar ring (Y). Then thread collar ring (Y) onto collar loop (T) protruding through canopy.
3. Install the bulbs (J) (bulbs included) into the sockets (I). **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!) (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**
4. Insert the glass shades (K) into the cups (H).

Your installation is now complete. Return power to the outlet box and test the fixture.

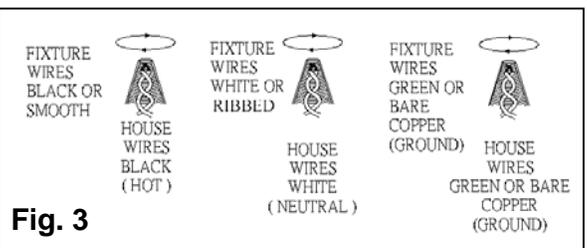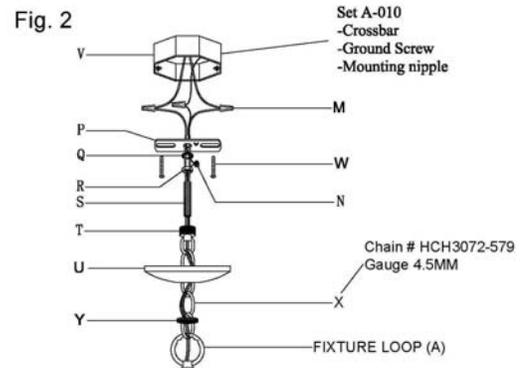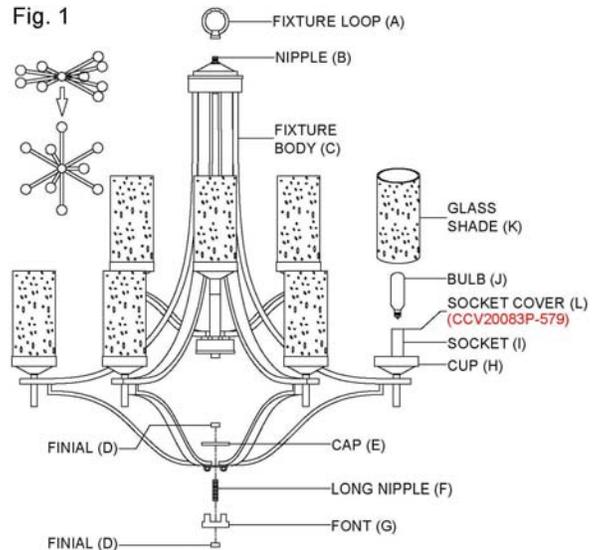

Notice: It is important to use proper chain pliers (not included) to OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.



INSTALLATION INSTRUCTIONS FOR FIXTURE
Item#4646-579 (New. 2021/02/01)

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (FIG. 1)

1. Shut of power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Thread fixture loop (A) onto all thread (B).
4. The arms have been turned to lay flat for shipping, turn the arms carefully so that they are evenly spaced apart. (See Fig. 1)
5. Place cap (E) and font (G) onto the arms, then secure with long all thread (F) and both finials (D).

MOUNTING THE FIXTURE (FIG. 2)

6. Thread the all thread (S) into collar loop (T).
7. Thread hex nut (R) to the other end of all thread (S), place the lock washer (Q) over all thread (S) and thread into crossbar (P). Secure all thread (S) to the crossbar (P) with lock washer (Q) and hex nut (R).
8. Take this crossbar assembly and mount to outlet box (V) using outlet box screws (W). The side of crossbar marked "GND" must face out.
9. Attach one quick link (Z) to end of the chain (X) and fixture loop (A).
10. By measuring, determine the correct number of links needed for proper hanging height. Using the chain pliers, disconnect and discard the remaining chain (X).
11. Carefully lace the fixture wires through the chain (X).
12. Slide collar ring (Y) over chain (X), then do the same with canopy (U).
13. Attach the other quick link (Z) to chain (X) and collar loop (T).
14. Feed the fixture wires through collar loop (T) and all thread (S) and pull the fixture wires until tight.

CONNECTING THE WIRE (See fig.3)

15. Connect the electrical wires as shown in Fig. 3, making sure that all wire connectors (M) are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the crossbar (P) using the ground green screw (N) provided.
16. Tuck the wire connectors (M) neatly into the outlet box and raise the canopy (U) over collar loop (T) and secure with collar ring (Y).
17. Install (12) twelve candelabra base bulbs (J) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification.
—DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)
18. Insert glass shades (K) into cups (H).

Your installation is now complete. Return power to the outlet box and test the fixture.



Notice: It is important to use proper chain pliers (not included) to OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

