
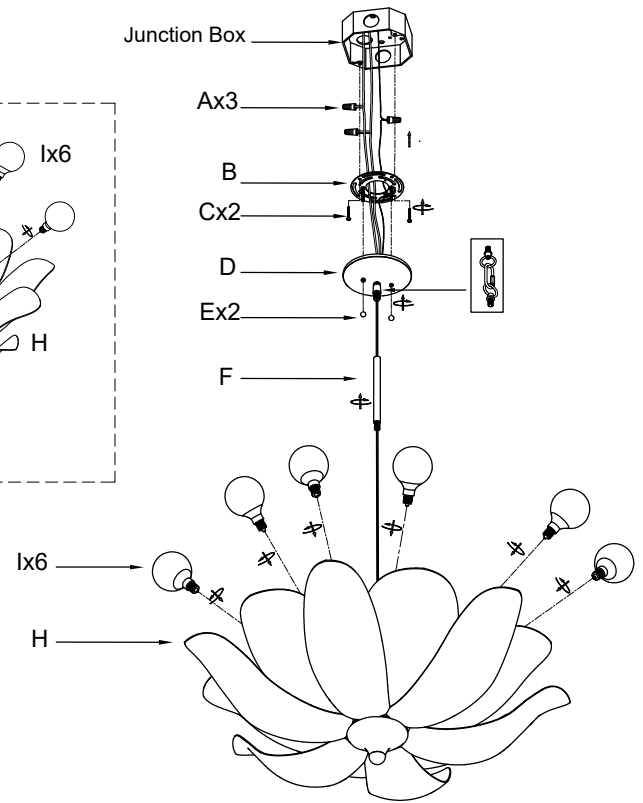


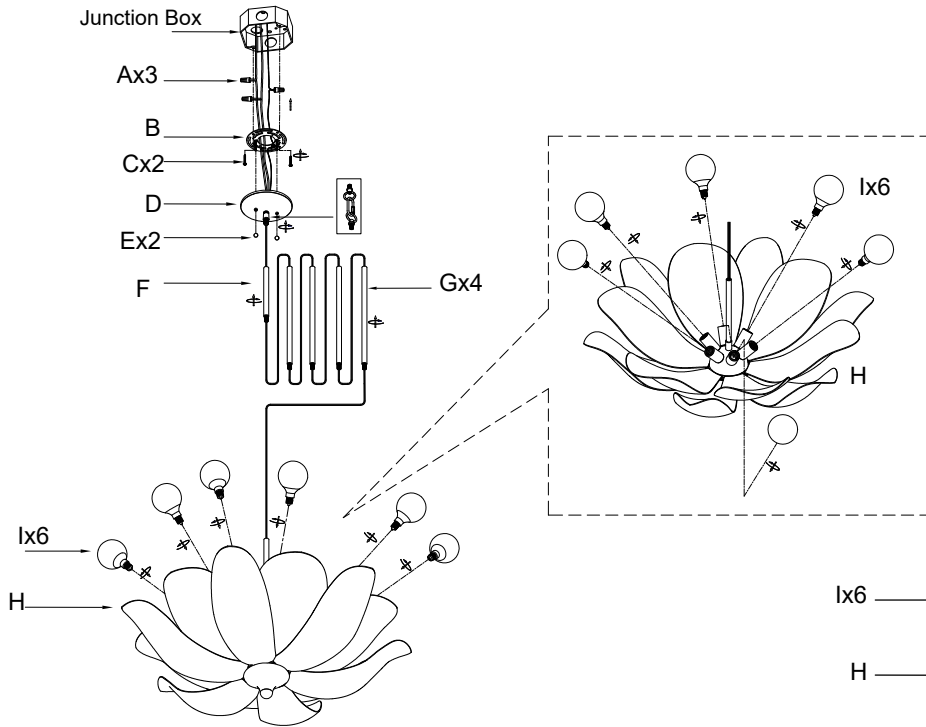

PENDANT ASSEMBLY INSTRUCTIONS

1. Carefully unpack and identify all parts referring to illustration for parts identification.
2. Turn the power to the installation point OFF.
3. Assemble the rods (F, G) together and thread the bottom end into the coupling on the body (H) until snug. Thread the top end into the nipple on the canopy (D).
4. Attach the mounting plate (B) to the junction box and secure it by using the two screws (C). The side of the mounting plate marked "GND" must face outward.
5. Use the wire connectors (A) to connect fixture wires and supply wires, black to black, white to white, and ground to copper/bare.
6. Place the canopy (D) over the mounting plate (B) and allow the mounting screws to go through canopy (D). Secure it with the knobs (E).
7. Install proper bulbs (I) (not included) into each socket referring to the markings and/or labels on the fixture for maximum wattage.
8. Restore power to the installation point and retain this sheet for future reference.

SEMI-FLUSH ASSEMBLY INSTRUCTIONS

1. Carefully unpack and identify all parts referring to illustration for parts identification.
2. Turn the power to the installation point OFF.
3. Thread the the rod (F) into the coupling on the body (H) until snug. Thread the top end into the nipple on the canopy (D).
4. Attach the mounting plate (B) to the junction box and secure it by using the two screws (C). The side of the mounting plate marked "GND" must face outward.
5. Using the wire connectors (A) to connect fixture wires and supply wires, black to black, white to white, and ground to copper/bare.
6. Place the canopy (D) over the mounting plate (B) and allow the mounting screws to go through canopy (D). Secure it with the knobs (E).
7. Install proper bulbs (I) (not included) into each socket referring to the markings and/or labels on the fixture for maximum wattage.
8. Restore power to the installation point and retain this sheet for future reference.