


BALANCE SINGLE LED PATH LIGHT
6061

WAC
LANDSCAPE LIGHTING

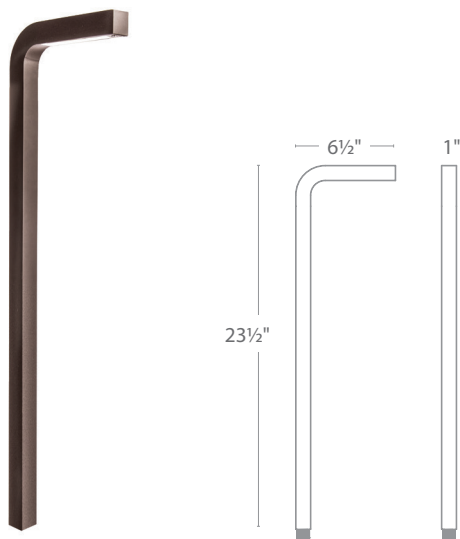

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION


Sleek linear design blends seamlessly into pathways while providing soft, even illumination.

SPECIFICATIONS

Input: 9-15VAC (Transformer is required)
Power: 6.5W / 11.5VA (Use VA value for sizing the transformer and calculate voltage drop.)
Brightness: 275 lm
CRI: 90
Rated Life: 60,000 hours

FEATURES

- IP66 rated, Protected against powerful water jets
- Factory sealed water tight fixtures
- Solid diecast corrosion resistant aluminum alloy
- Recommended spacing for installation: Residential 11 to 13ft; Commercial: 7 to 9ft
- Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts are included
- Maintains constant lumen output against voltage drop
- UL & cUL 1838 Listed

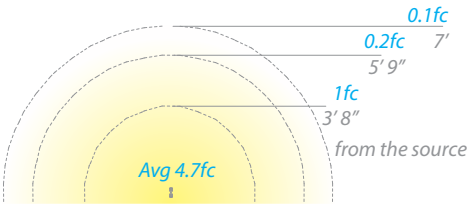

ORDERING NUMBER

Color Temp		Finish
6061	Single	BZ Bronze on Aluminum BK Black on Aluminum BBR Bronze on Brass
	Balance	
	27 2700K Warm White	
	30 3000K Pure White	

6061-___BZ

Example: 6061-30BZ

BALANCE SINGLE LED PATH LIGHT
6061

WAC
LANDSCAPE LIGHTING

Surface Mount Flange/Stake



Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box

5000-SCP-BZ
Bronze on Aluminum
5000-SCP-BBR
Bronze on Brass

Additional
Mounting Stake



9000-ST9-BK
Durable PVC stake



Guardian Mount
*Heavy duty stainless steel spike to position fixture.
Formed from a single piece of metal*

9000-SP9-BZ
Stainless Steel

Magnetic Transformers

*Stainless Steel, 12-15V output, IP65 rated, UL 1838 listed
See transformer spec sheet for details and its accessories*

9075-TRN-SS
75W Max

9150-TRN-SS
150W Max

9300-TRN-SS
300W Max

9600-TRN-SS
600W Max

