# SEMI-FLUSH FIXTURE INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

## **CAUTION**

WARNING: Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor. Min 90°C supply conductors.

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

# **GENERAL**

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.


Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

#### ASSEMBLY AND INSTALLATION

- 1. Thread the cylinder nut screw (10) with hex nut (8) to mounting bar (6).
- 2. Secure the mounting bar (6) with mounting screw (7) to the outlet box (1).
- 3. Pull out the outlet wire and ground wire from the outlet box (1). Make wire connections
  - --Ribbed wire (w/o marking) from light to white wire (2) from power source.
  - --Smooth wire (w/o marking) from light to black wire (3) from power source.
  - --Loop the ground wire (4) to mounting bar (6) with a ground wire screw (9)
- 4.Attach the fixture canopy (11) against the outlet box (1), secure with the cylinder nut (12)
- 5.Place the shade (14) onto the socket (13) on back plate (11) and tighten by the socket ring (15).
- 6.Install bulb (16):(bulb not included)

(Please don't exceed the maximum capacity that recommended on the sockets).

## INSTALLATION IS NOW COMPLETED

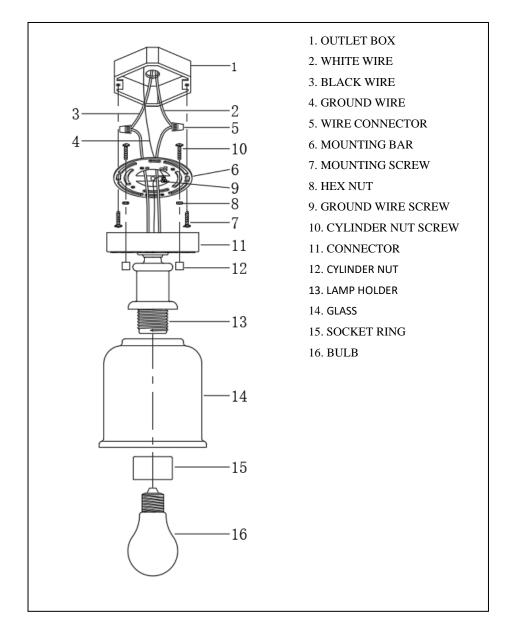

Line art shown may not exactly match the fixture enclosed. However, the installations do apply to this fixture.

ITEM NO: 733F1 734F1