



1718 W. Fullerton Chicago, IL 60614  
 Ph: 773.770.1195 • Fax: 773.935.5613  
 www.PureEdgeLighting.com • info@PureEdgeLighting.com  
 © 2016 PureEdge Lighting. All Rights Reserved.


## Installation Instructions for TruTrack Dual Source L-Connector

TR24-DS-L\_C-WH


### IMPORTANT INFORMATION

- This product is for indoor dry locations only.
- This instruction shows a typical installation.


**SAVE THESE INSTRUCTIONS!**



## Install the L-Connector

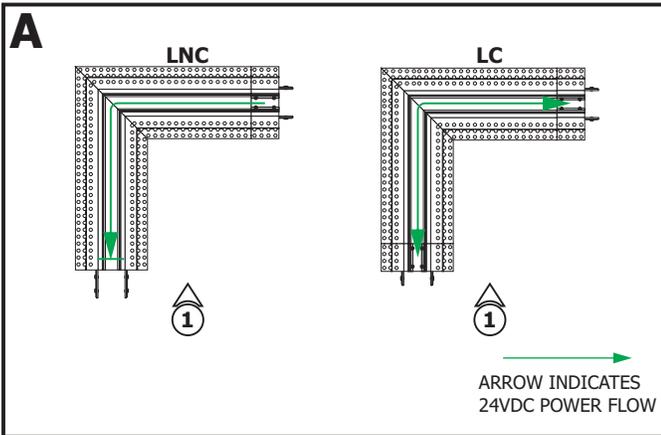


**1:** L-Connectors join two track sections together in a 90 degree angle and either isolate the power from one track to the other (LNC) or conduct the power from one track to the other (LC).

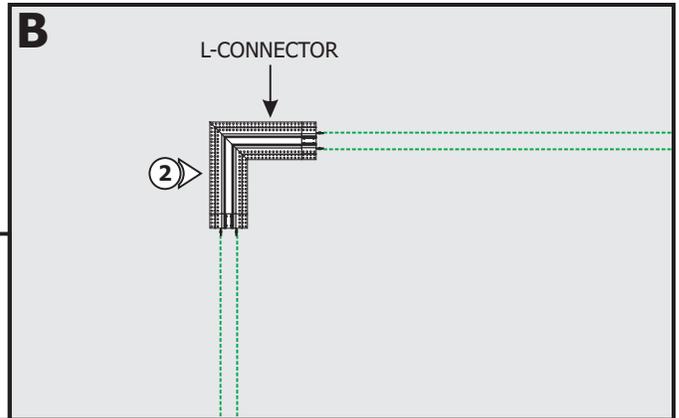

**2:** Place the L-Connector against the ceiling. Ensure the L-Connector is aligned with the TruTrack Recessed Channel installation location.

**3:** Mark the installation location of the L-Connector on the drywall using a pencil or chalk line before cutting.

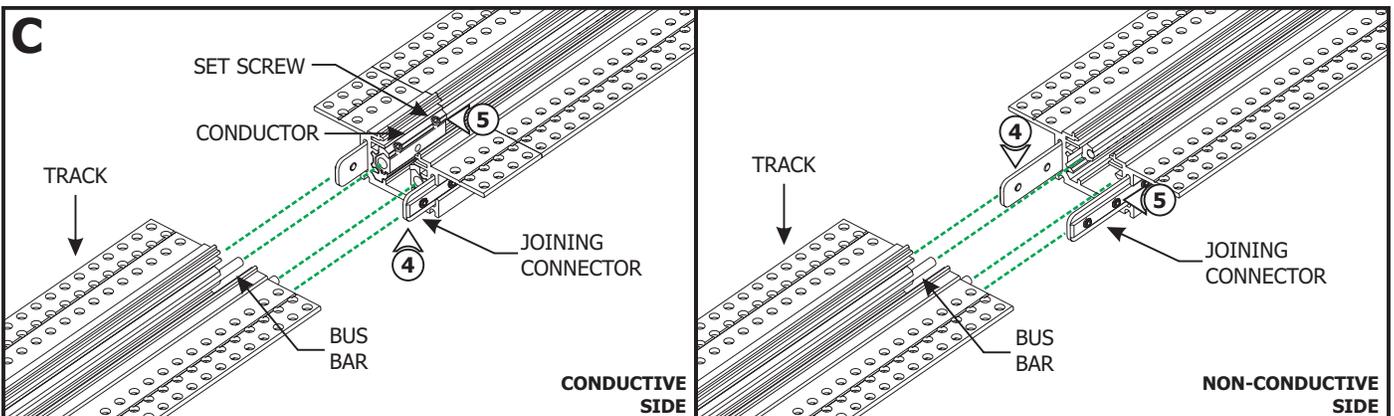

**4:** Slide the track over the joining connectors on the conductive or non-conductive side of the connectors.

**5:** Insert the bus bars into the conductor of the conductive side or into the end of the non-conductive side. Tighten the set screws on the joining connectors and the set screws on the conductors using the provided Allen wrenches.

**NOTE:** Follow steps described in the TruTrack Track instruction to complete the installation.