

Round Glass Shield

700MR16G_ 1.0




ACCESSORIES

GENERAL PRODUCT INFORMATION:





This product is suitable for indoor dry locations only.

This product must be used with Tech Lighting system only.

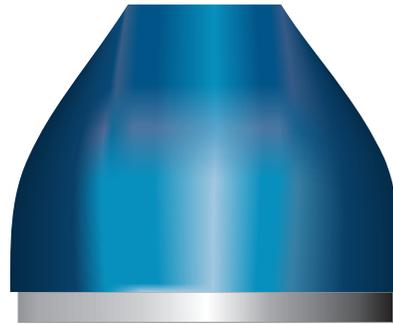

Installing the Glass Shield to a Fixture with a MR16 Socket

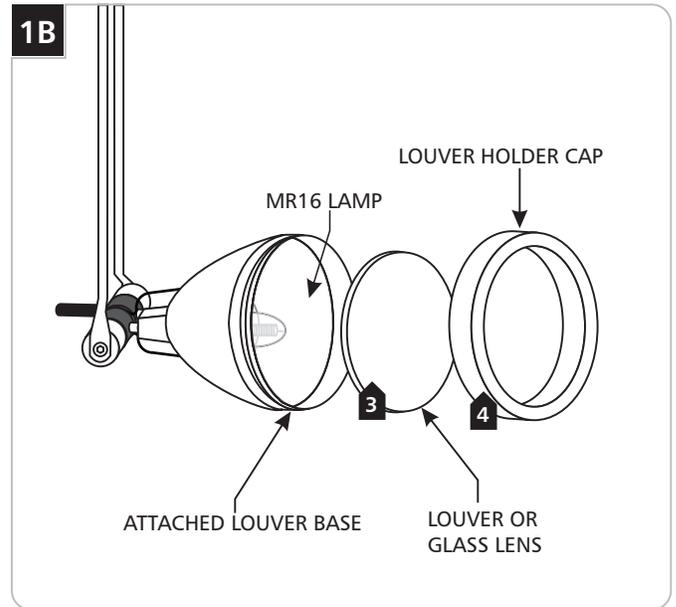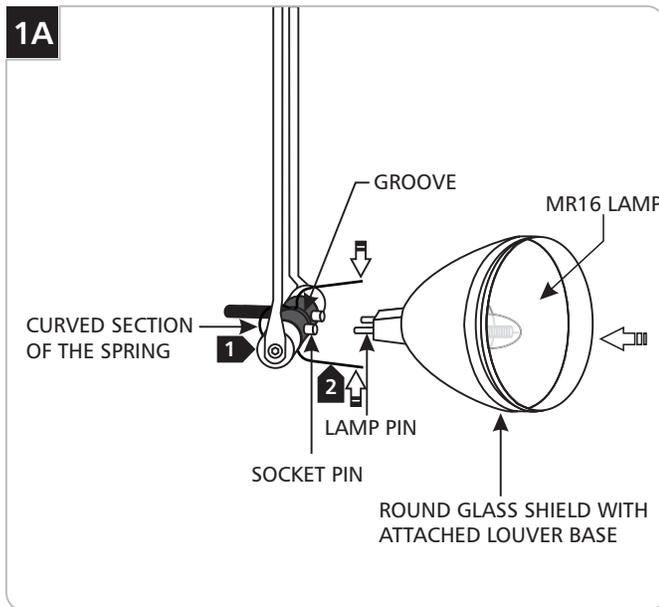


Use **MAX 50 Watt MR16 Front Cover Halogen Lamp.**




- 1** Snap the spring onto the groove in the middle of the MR16 socket.
- 2** Squeeze the spring ends together and feed them through the glass shield assembly; simultaneously push the lamp pins all the way into the socket pins.

- 3** Place the louver or glass lens on front of the MR16 lamp.
- 4** Screw the louver holder cap completely onto the louver base.

Installing the Glass Shield to Aero, Tilt, and Torpedo Fixture Type Socket

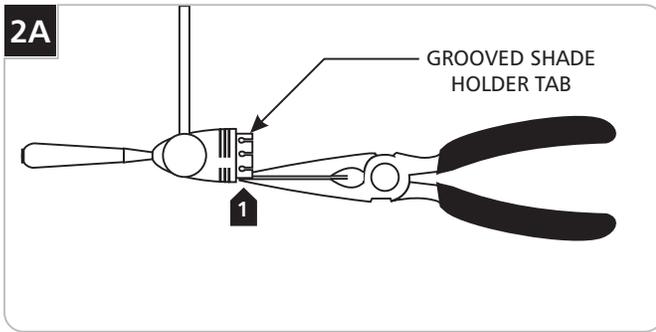


- 1 If the glass shield fits tight onto the fixture, then carefully bend the grooved shade holder tabs in slightly with the needle-nose pliers. If it fits loose, then carefully bend the grooved shade holder tabs out slightly with the needle-nose pliers.

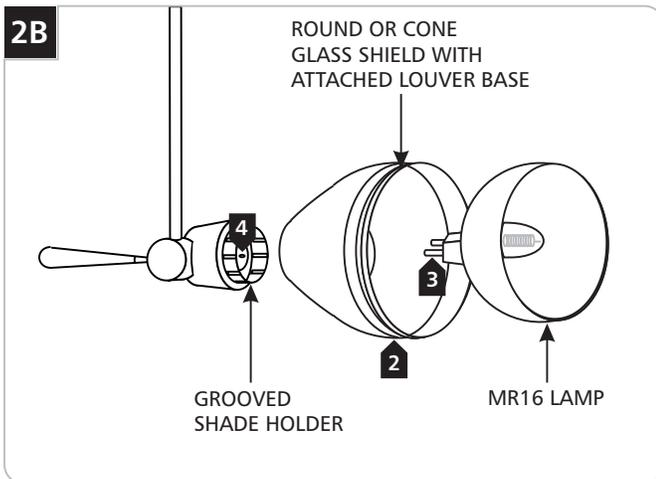

Use **MAX 50 Watt MR16 Front Cover Halogen Lamp.** 

- 2 Place the MR16 lamp into the glass shield.
- 3 Line the lamp pins up with the socket holes.
- 4 Push the lamp pins all the way into the socket holes; simultaneously push the glass shield onto the groove shade holder.

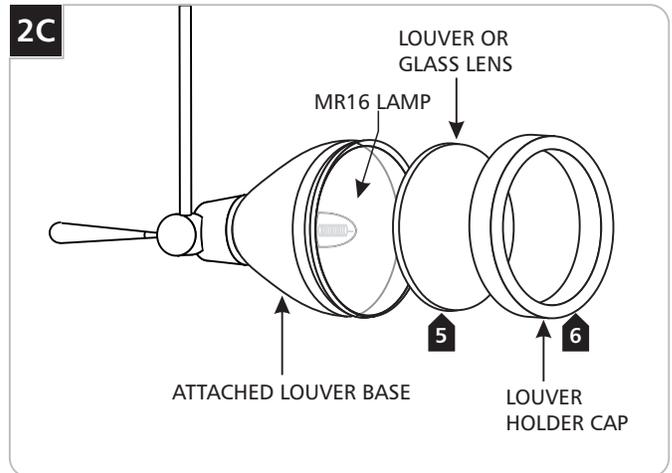

- 5 Place the louver or glass lens on front of the MR16 lamp.
- 6 Screw the louver holder cap completely onto the louver base.

SAVE THESE INSTRUCTIONS!



7400 Linder Ave, Skokie, IL 60077
847.410.4400

www.techlighting.com

© 2011 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.
A Generation Brands Company