



## ASSEMBLY INSTRUCTION MODEL# ADL-500-AG-CL



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 4 Candelabra Base Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE This fixture is Damp rated

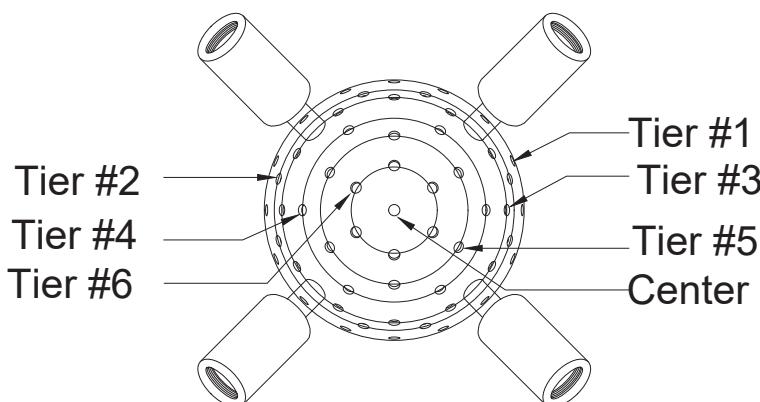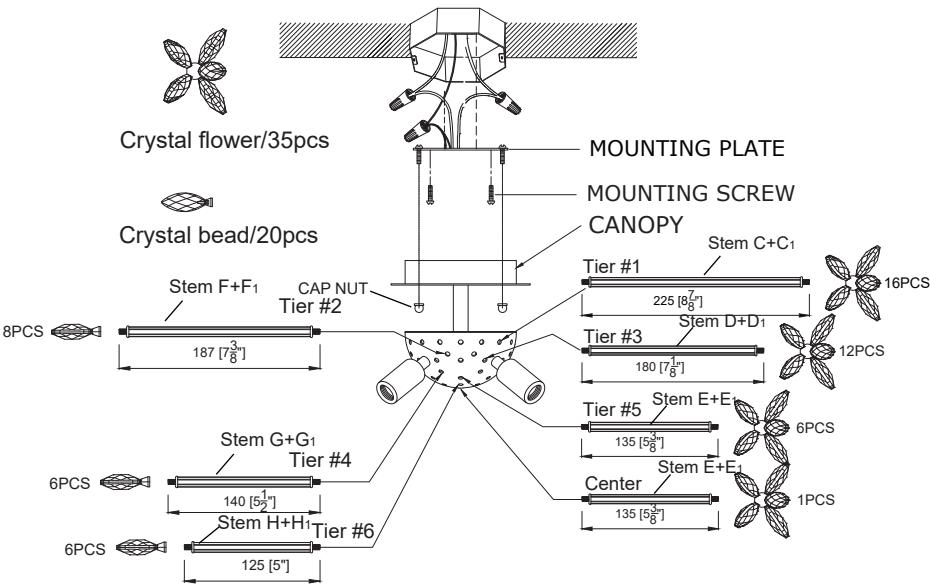

Starting at the center, install from Tier #6 to Tier#1.


### How to install

1. Attach the mounting plate to the junction box (not included) and secure with mounting screws.
2. Raise fixture up to the ceiling and connect the electrical wires as shown.
3. Align the holes of canopy with the screws on the mounting plate. Then secure with cap nuts.
4. Install the bulbs into socket.
5. Starting from the center, screw the stem, crystal flower and crystal bead into fixture body as shown on the diagram. Do not over tighten to avoid breaking the glass.

### Glass Sets

1. 16 sets Stem C+C<sub>1</sub> (metal stem L8 7/8+glass stem L8")
2. 12 sets Stem D+D<sub>1</sub> (metal stem L7 1/8+glass stem L6 1/4")
3. 7 sets Stem E+E<sub>1</sub> (metal stem L5 3/8+glass stem L4 7/8")
4. 8 sets Stem F+F<sub>1</sub> (metal stem L7 3/8+glass stem L6 5/8")
5. 6 sets Stem G+G<sub>1</sub> (metal stem L 5 1/2+glass stem L4 2/5")
6. 6 sets Stem H+H<sub>1</sub> (metal stem L5+glass stem L4 1/4")
7. 35 pcs Crystal flower
8. 20 pcs Crystal bead

**WARNING:** This product can expose you to Lead which is known to the state of California to cause cancer and/or birth defects or reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

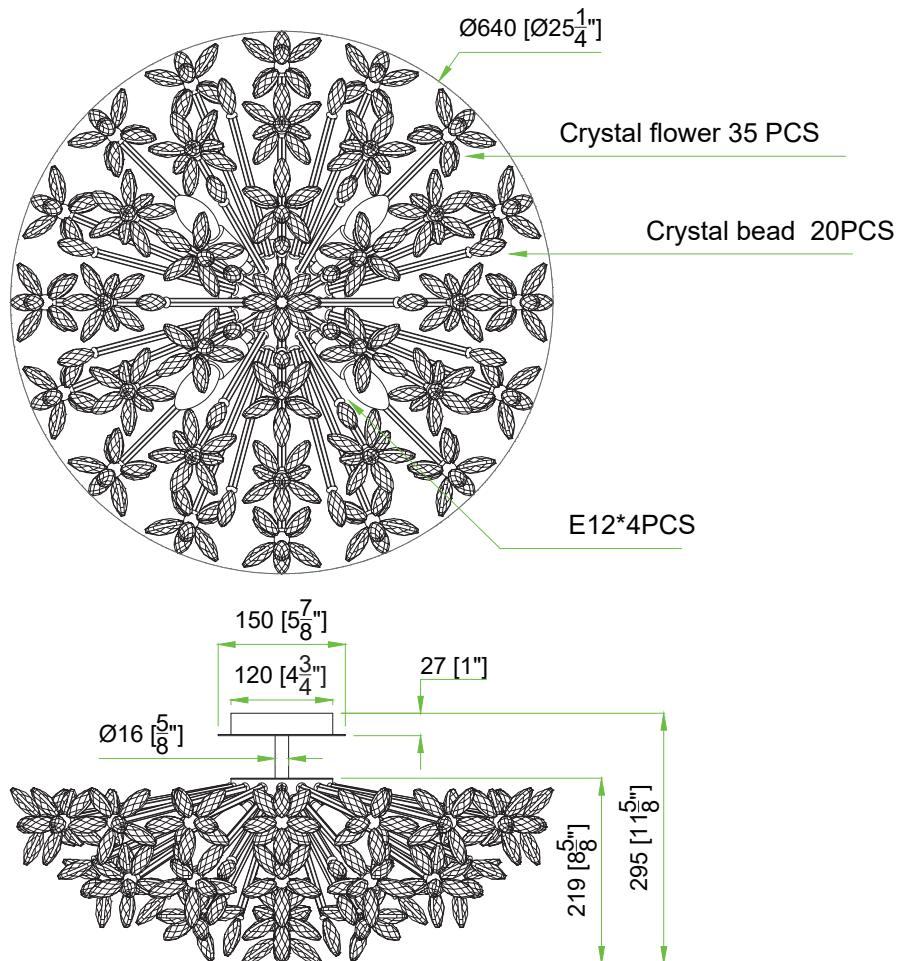

## Part Number

### Part Numbers

A. Mounting hardware includes

(1)-Mounting plate  
(2)-Mounting screws  
(2)-Canopy screws  
(1)-Ground screw

B. (1)-Canopy, D5.8xH1"  
(XBN500AGCAN4.75IN)

C. (16)-Metal stem L8 7/8"  
(XBN500AGMROD8.875IN)

C1.(16)-Glass stem L8"  
(XBN500GLROD8IN)

D. (12)-Metal stem L7 1/8"  
(XBN500AGMROD7.125IN)

D1.(12)-Glass stem L6 1/4"  
(XBN500GLROD6.25IN)

E. (7)- Metal stem L5 3/8"  
(XBN500AGMROD5.375IN)

E1.(7)- Glass stem L4 7/8"  
(XBN500GLROD4.875IN)

F. (8)- Metal stem L7 3/8"  
(XBN500AGMROD7.375IN)

F1. (8)- Glass stem L6 5/8"  
(XBN500GLROD6.625IN)

G. (6)- Metal stem L 5 1/2"  
(XBN500AGMROD5.5IN)

G1.(6)- Glass stem L 4 2/5"  
(XBN500GLROD4.4IN)

H. (6)- Metal stem L5"  
(XBN500AGMROD5IN)

H1.(6)- Glass stem L4 1/4"  
(XBN500GLROD4.25IN)

I. (35)-Crystal flower  
(XBN500AGCRYB)

J. (20)-Crystal bead  
(XBN500AGCRYA)

K. (2)- Cap nuts

